REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS4999	Q
1	TCP-2		6-16-66		

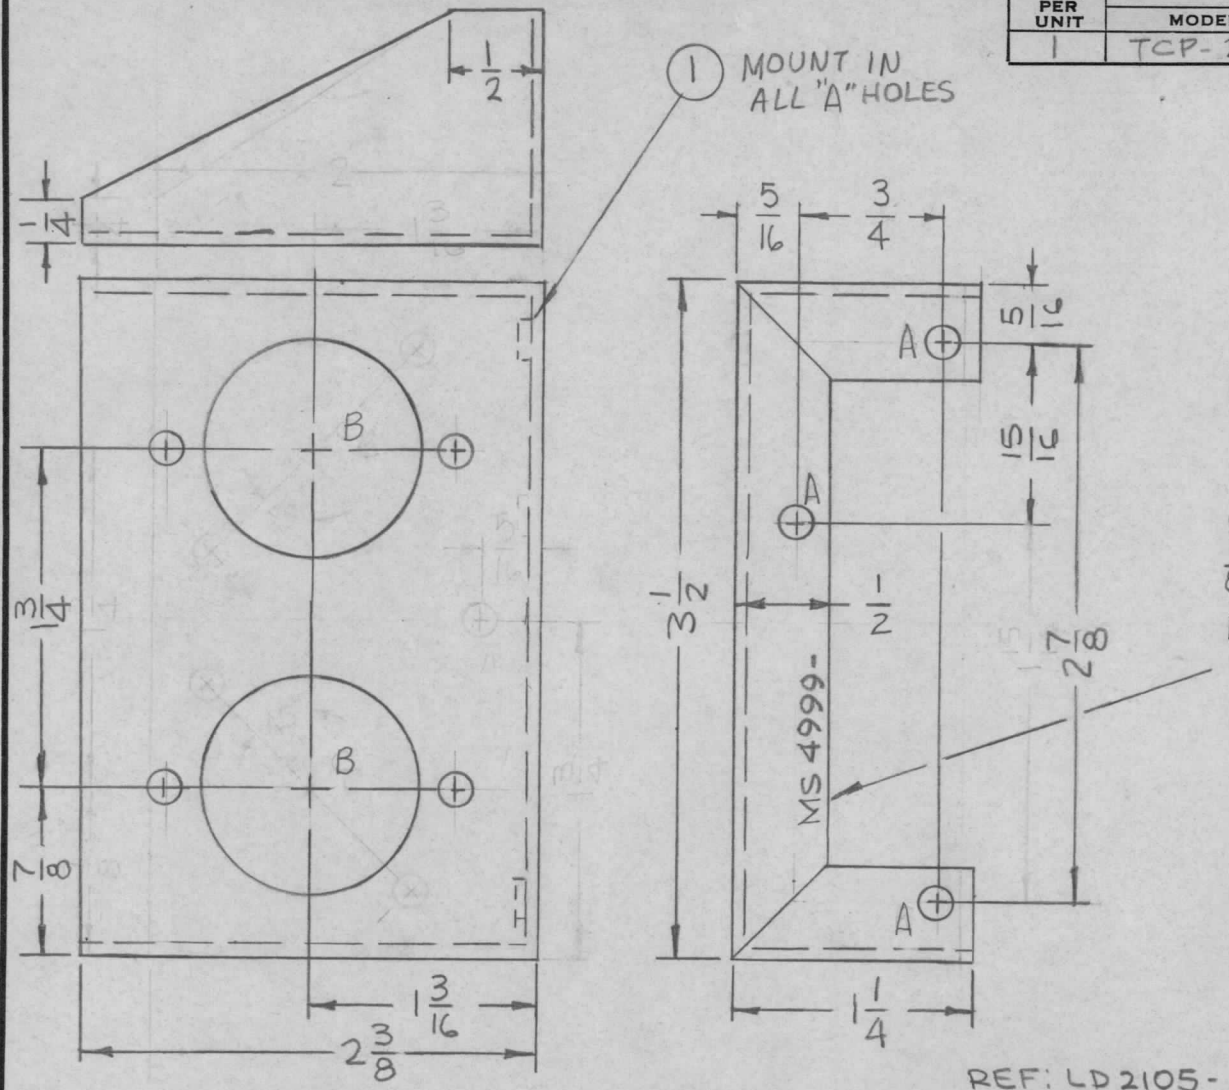

HOLES	DESCRIPTION	REQ.
A	.191-.194 DIA.	3
B	SEE DETAIL	2

MARK TMC P/N 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

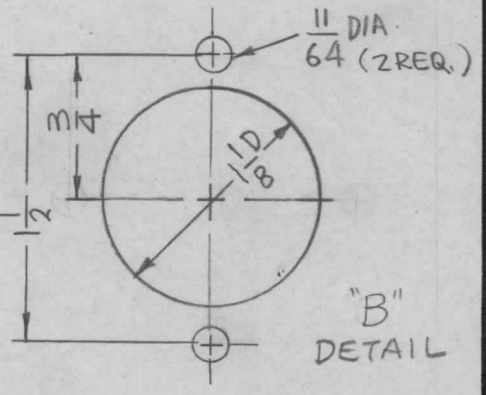

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

REF: LD2105-

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Q	ORIGINAL RELEASE FOR PRODUCTION	12.1.66	~~11~~	LHD		
X3	ONE 11/64 HOLE DELETED	11-29-66	X3		A	
X2	ADDED 1/2 DIM	8-29-66	X2	JBC		
X1	2-3/8 WAS 2 1/4 ;"C" RE-LOCATED	8-2-66	X1			
X	EXP. RELEASE	6-16-66	X			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
3	1	NT129-632-4	NUT, PLAIN, SPLINE	A

F. BUDETTI

STOCK SIZE .081

MATERIAL ALUMINUM

TYPE & TEMPER 5052-H32

FINISH & SPEC. NO. S404 YEL. IRIDITE

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

BRACKET, MTG. RELAY

DRAWN	CHECKED	FINAL APPROVAL

ELEC. DES. APP.	MECH. DES. APP.	MS4999	Q

TMC FORM 108-A

REPROVEL NO. 440H 23845