


REQ. PER UNIT	USED ON			MS5003	Ø
	MODEL	ASS'Y. NO.	DATE		
1	TSTE-10K	AX 610	7-1-66		

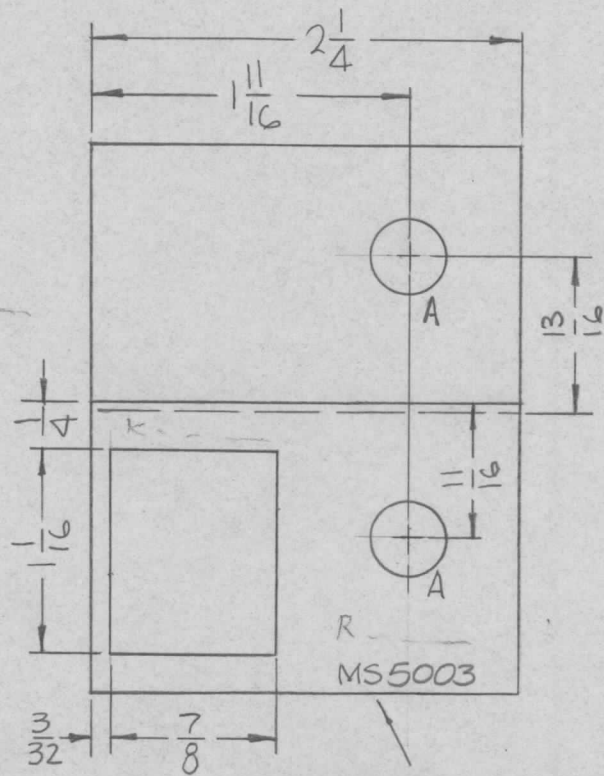

HOLES:  
A-3/8 DIA. (2 REQ.)

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES

MARK TMC P/N  
1/8 HIGH GOTHIC  
W/LATEST REV.  
LETTER.

						REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL	
						.054 THICK		THE TECHNICAL MATERIEL CORP.			
						STOCK SIZE		MAMARONECK, NEW YORK			
Ø	ORIGINAL RELEASE	7/15/69				ALUMINUM		BRACKET, MTG RELAY			
X	EXP. RELEASE	7-1-66	X			MATERIAL		7/15/69			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				5052-H32					
		1:1				TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A		S404 YEL IRIDITE		AVC	A.A	MS5003	Ø
TOLERANCES						FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.		