



REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
16	VOX-7	A 4487	
8	MMX-()	A 4487	

MS5011 A

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

"A" HOLE 3/32 DIA. 2 REQ'D

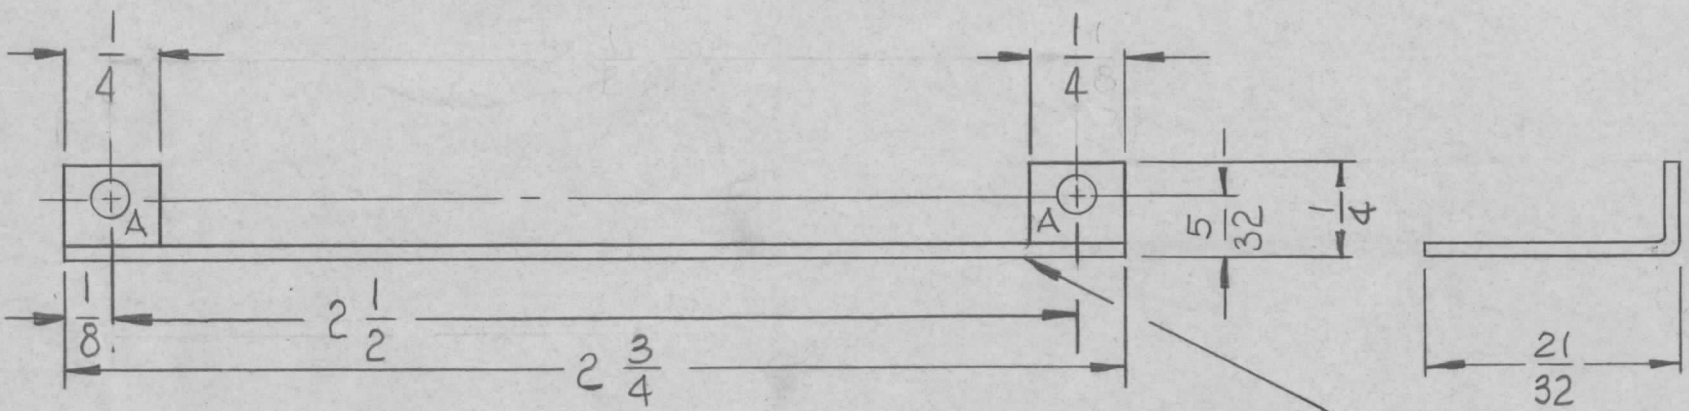

MARK TMC DT/No MS5011-
1/8 HIGH GOTHIC W/LATEST
REVISION LETTER.

REQ.	ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL
A		.031		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		STOCK SIZE			
		ALUMINUM		BRACKET, & SHIELD	
		MATERIAL			
		5052-H32	ww		
		TYPE & TEMPER	DRAWN	CHECKED	FINAL APPROVAL
		HEAT TREAT. SPEC.			
		5404 YEL IRIDITE			
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
					MS5011 A

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

FRACTIONS
± 1/64
ANGLES
± 0° 30'

TOLERANCES
A

SCALE
2/1

CODE
5401-451