


REQ. PER UNIT	USED ON			MS5017 Q
	MODEL	ASS'Y. NO.	DATE	
4	RAK 110-2	BMAIS9	6-20-66	

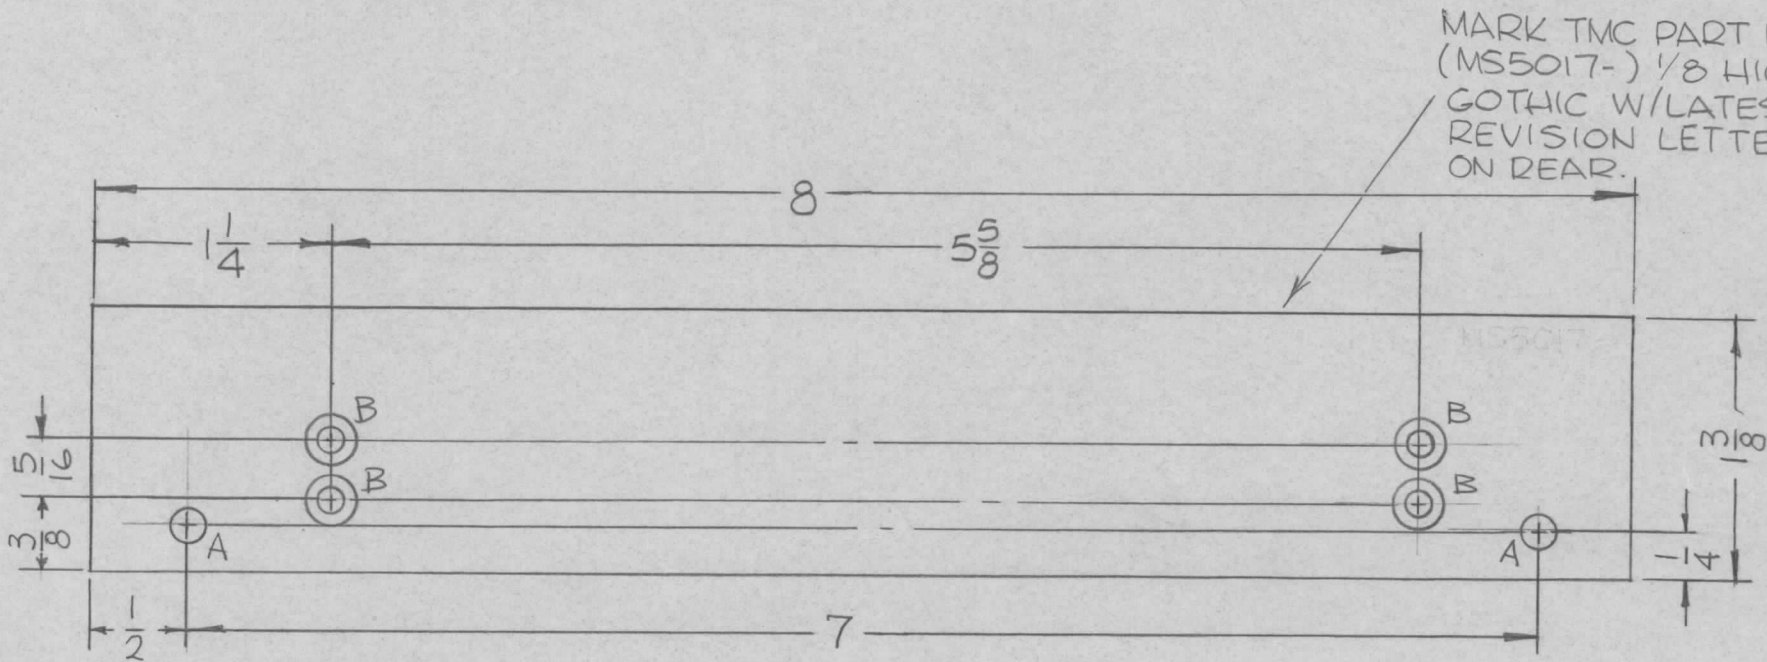

HOLES:
 A ~ 11/64 DIA. (2 REQ)
 B ~ DR. 120 DIA. C'SINK 82°
 TO .230 DIA. (4 REQ.)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
Q	ORIGINAL RELEASE FOR PRODUCTION	12.1.66		WFO				.081 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
X	EXP. RELEASE	6-20-66	X					ALUMINUM		BRACKET, MTG TERMINAL BOARD	
								MATERIAL			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE									
		1:1									
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A								
	TOLERANCES			5052-H32		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
				S404 YEL IRIDITE		1/20/66					MS5017 Q
				FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.			