


REQ. PER UNIT	USED ON			MS5029	Q
	MODEL	ASS'Y. NO.	DATE		
1	TLAA-2.5K	A5493	8-8-66		

HOLE	DESCRIPTION	REQ.
A	1/4 DIA.	1
B	.191-.194 DIA	2

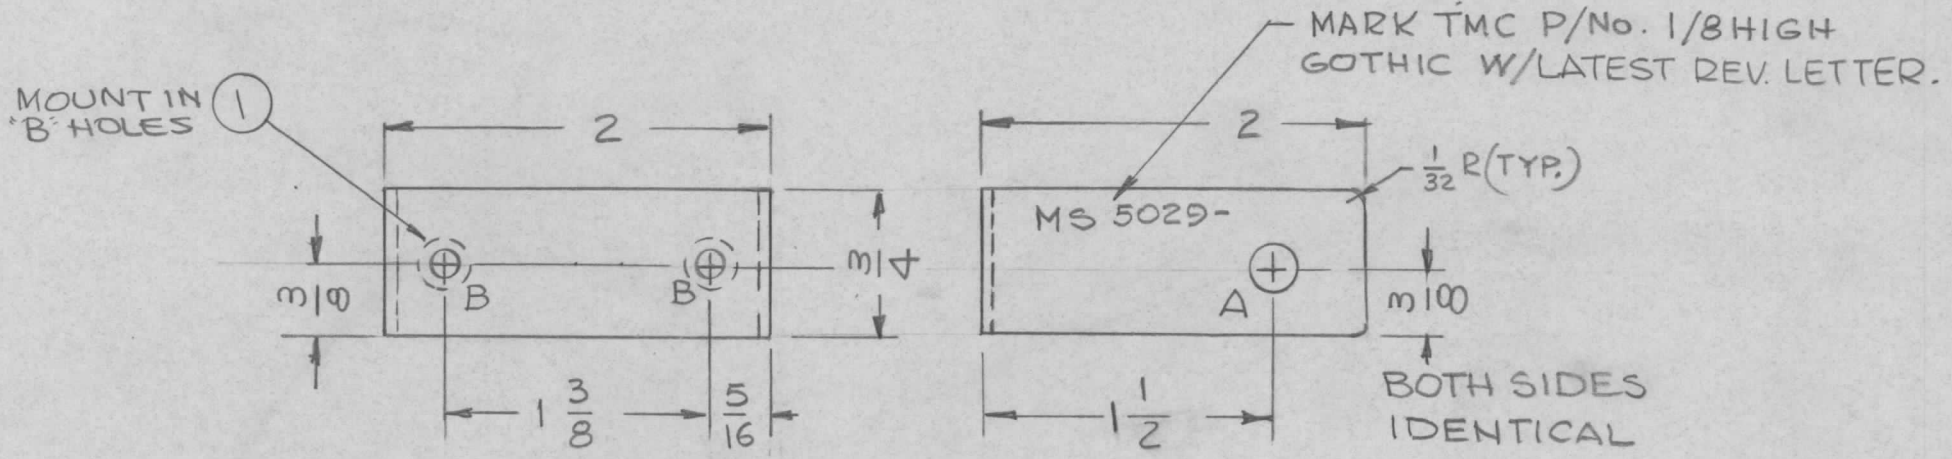

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT INSERTS AFTER FINISHING

							2	1	NT129-632-4	NUT, PLAIN SPLINE	B	
							REQ. ITEM	PART NO.		BUDETTI	DESCRIPTION	SYMBOL
							.064 THK.		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
							STOCK SIZE		BRACKET, LOAD CAP			
							ALUMINUM					
							MATERIAL					
							5052-H32		G.D.L. 8.8.66	OCB	FINAL APPROVAL	
							TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN	
							S245 SILVER PLATE S423 SILVER KOTE				MECH. DES. APP.	
							FINISH & SPEC. NO.		ELEC. DES. APP.		MS5029 Q	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A			
TOLERANCES												