


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	TLAA-2.5K	AS128	8-13-66

MS5038 Ø

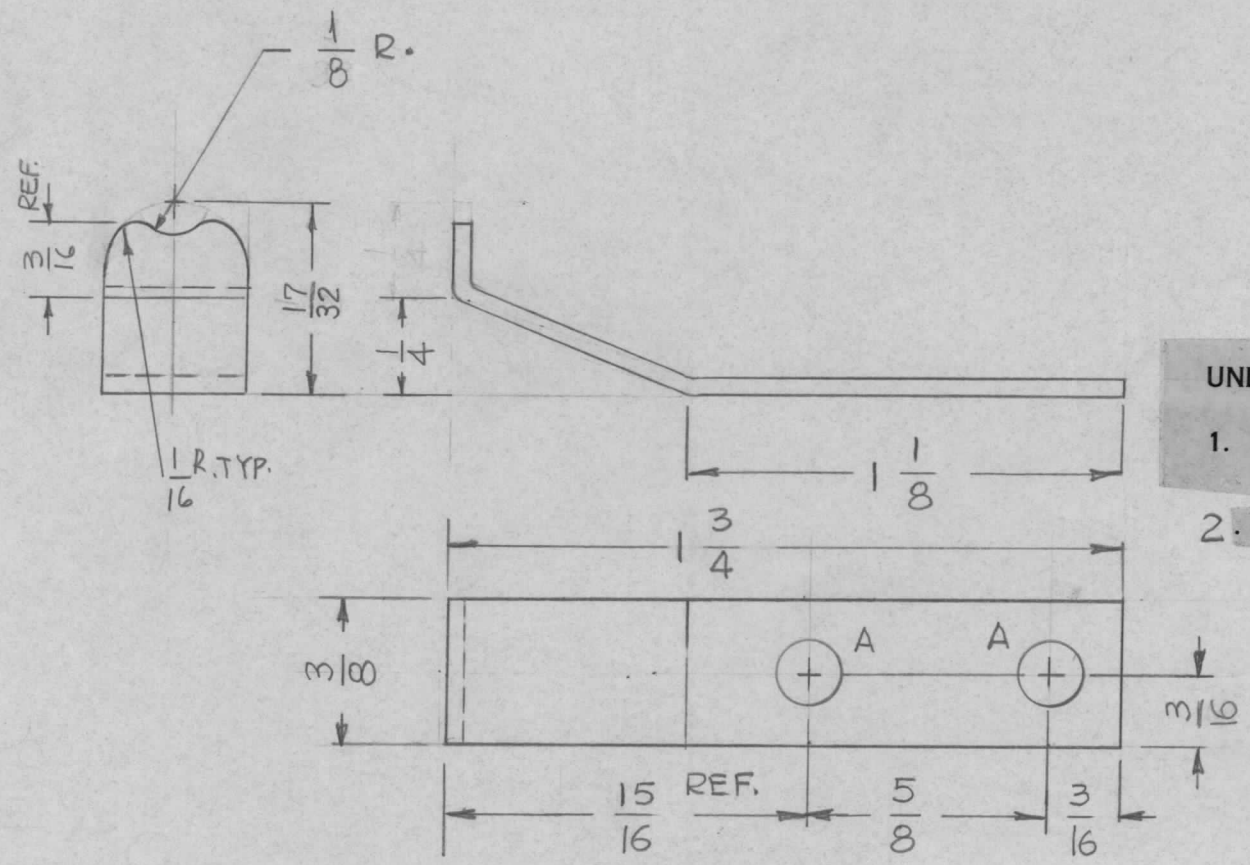

HOLE  
A - 11/64 DIA. 2REQ.

UNLESS OTHERWISE SPECIFIED:  
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS  
2. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	BUDETTI	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	11.11.66	W	LHW		<i>[Signature]</i>	.030 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK  SPRING.; SHORTING			
X1	CONTACT POINT REVISED	8-30-66	X1	<i>[Signature]</i>		<i>[Signature]</i>	STOCK SIZE					
X	EXP. RELEASE	B-1366	X	GDL			BERYLLIUM COPPER					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							MATERIAL		HEAT TREATED TYPE & TEMPER: S245 SILVER PLATE / S423 SILVER KOTE HEAT TREAT. SPEC. FINISH & SPEC. NO.			
SCALE							DRAWN		DRAWN		8-13-66 G.D.L. DRAWN	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		CODE A	
							ELEC. DES. APP.		MECH. DES. APP.		MS5038 Ø	