

HOLES:


A ~ 13/64 DIA. (2REQ.)

B ~ DR. 144 DIA. C'SINK (2REQ.)
82° TO 284 DIA.

C ~ 5/16 X 5/8 SLOT (1REQ.)

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	RAK110-2	A5586	7-29-66
1	RAK111-2	A5586	

MS5039 Q

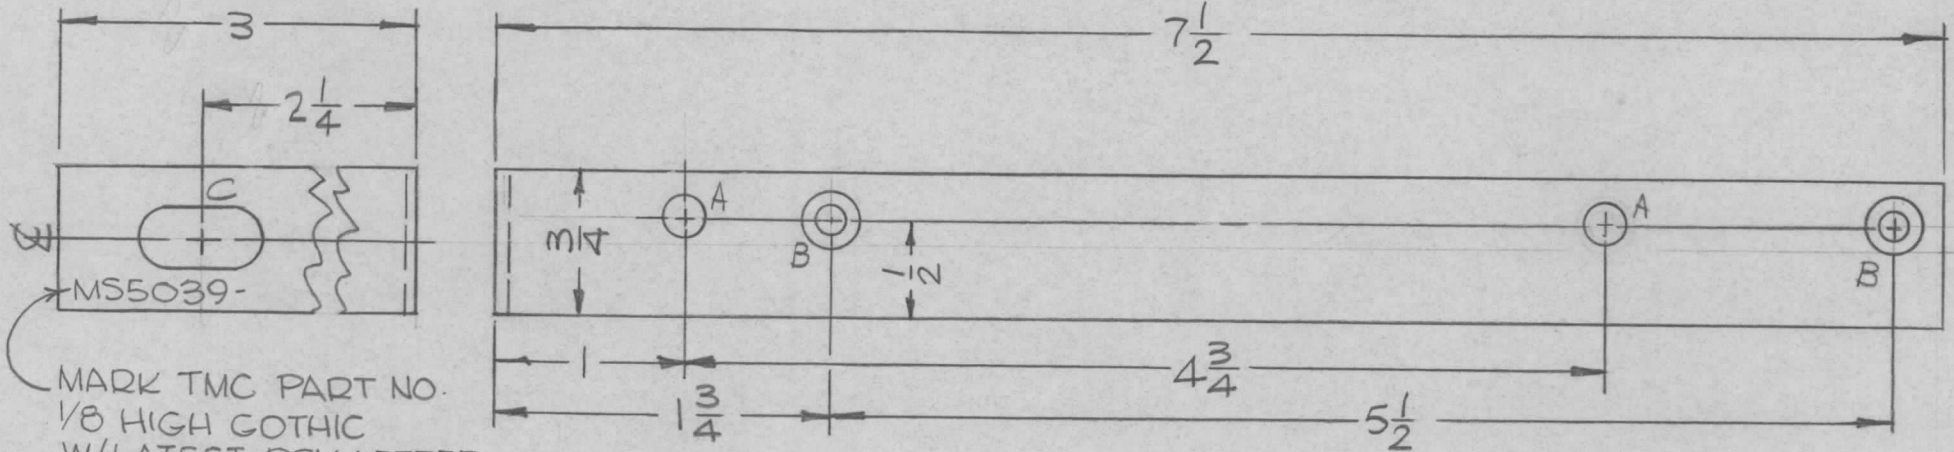

MARK TMC PART NO.
1/8 HIGH GOTHIC
W/LATEST REV. LETTER.

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	F. BUDETTI DESCRIPTION	SYMBOL	
Q	ORIGINAL RELEASE FOR PRODUCTION	12.1.66		WFO			.064 THICK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	STRAP, END, FILTER BOARD	
XI	TMC PT. NO. ADDED TO PICT.	11.21.66		Jc			STOCK SIZE				
X	EXP. RELEASE	7.29.66	X				ALUMINUM				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1				5052-H32				
	DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A		S404 YEL IRIDITE				
							FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS5039 Q	