


REQ. PER UNIT	USED ON		MS5098	Ø
	MODEL	ASS'Y. NO.		
	RSSA-10		9.26.65	

HOLE	DESCRIPTION	REQ
A	1/2 DIA	1
B	1/64 DIA	1

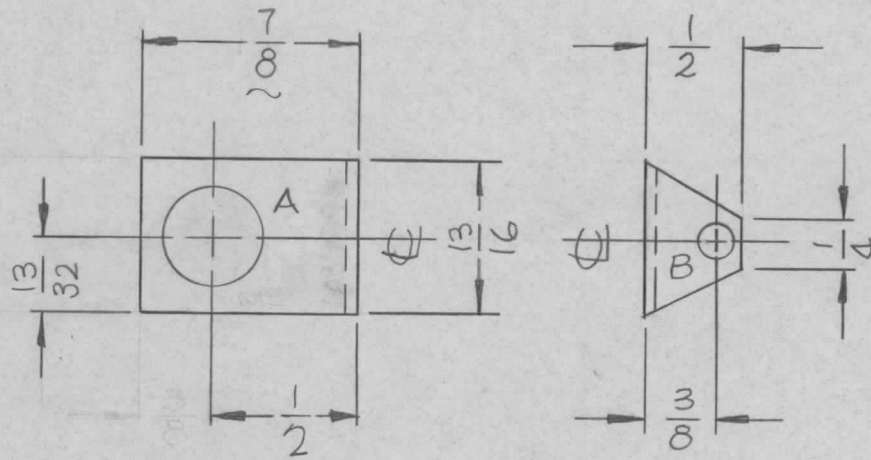

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

REQ.	ITEM	PART NO.	EATON	DESCRIPTION	SYMBOL	
Ø	ORIG. RELEASE	11-20-68	Ø	R.G.	<i>file</i>	
XI	MODEL WAS RSSA-16					
X	EXPERIMENTAL RELEASE	9-27-66	<i>W</i>	<i>ufw</i>	<i>JS</i>	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE 1/1				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE			
				5052-H32		<i>WHD</i>
				STOCK SIZE		
				ALUMINUM		
				MATERIAL		
				S404 YELLOW IRIDITE		<i>JS</i>
				FINISH & SPEC. NO.		<i>9/29/66</i>
						<i>S. Demarc</i>
						11/19/68
						MECH. DES. APP.
						MS5098
						Ø