

HOLES


- A - 11/64 DIA - 6 REQ
- B - 7/8 DIA - 1 REQ
- C - .161 - .164 DIA - 6 REQ.

REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	VLRC-1		7-13-67

MS5125 \emptyset

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

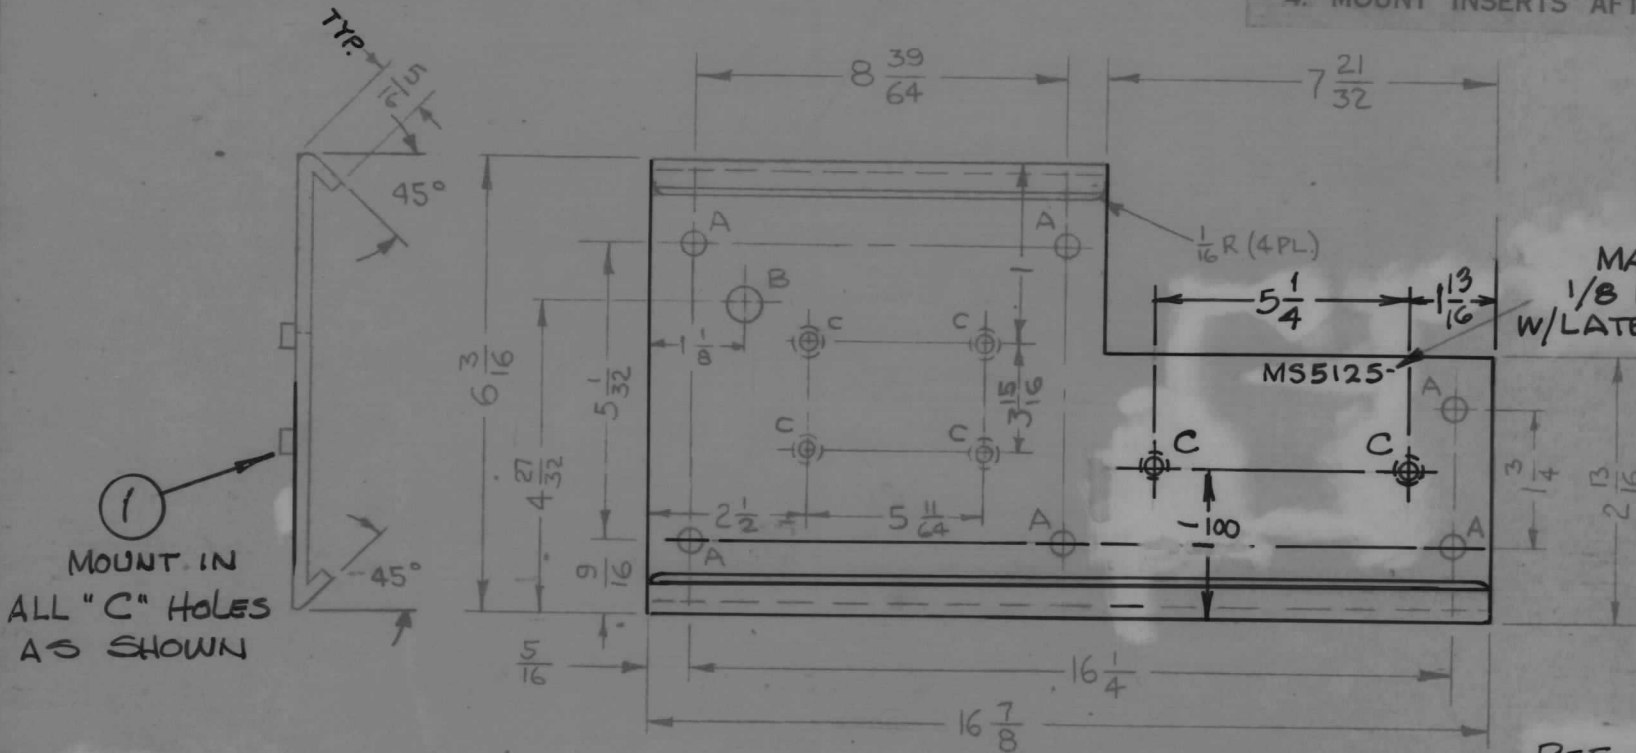

1
MOUNT IN ALL "C" HOLES AS SHOWN

MARK TMC PT. NO. 1/8 HIGH GOTHIC, W/LATEST REV-LETTER.

REF. LD 2229

				61	NT-129-440-4	NUT, PLN, SPLINE	C
				REQ. ITEM	PART NO.	A-MARTINENGO DESCRIPTION	SYMBOL
				.062		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
				ALUMINUM		PLATE, REAR	
				MATERIAL			
				5052-H32		HLD	
				TYPE & TEMPER		DRAWN	
				HEAT TREAT. SPEC.		CHECKED	
				S404 YEL. IRIDITE		FINAL APPROVAL	
				FINISH & SPEC. IO.		ELEC. DES. APP.	
						MECH. DES. APP.	
						MS5125 \emptyset	

\emptyset	ORIG. RELEASE	8/4/67	\emptyset	HLD	
X	EXPER. RELEASE	7/13/67	X	HLD	
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE			
DECIMALS .X \pm .05 .XX \pm .01 .XXX \pm .005		FRACTIONS \pm 1/64 ANGLES \pm 0° 30'		CODE A	
TOLERANCES		S401-451			