


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO.	DRAFT	CHKD
X		EXP. RELEASE	1/1/68	#	[Signature]	[Signature]
Ø		ORIGINAL RELEASE FOR PRODUCTION	4/1/68	Ø	[Signature]	[Signature]

MARK TMC P/N 1/8 HIGH GOTHIC WITH LATEST REV. LETTER.

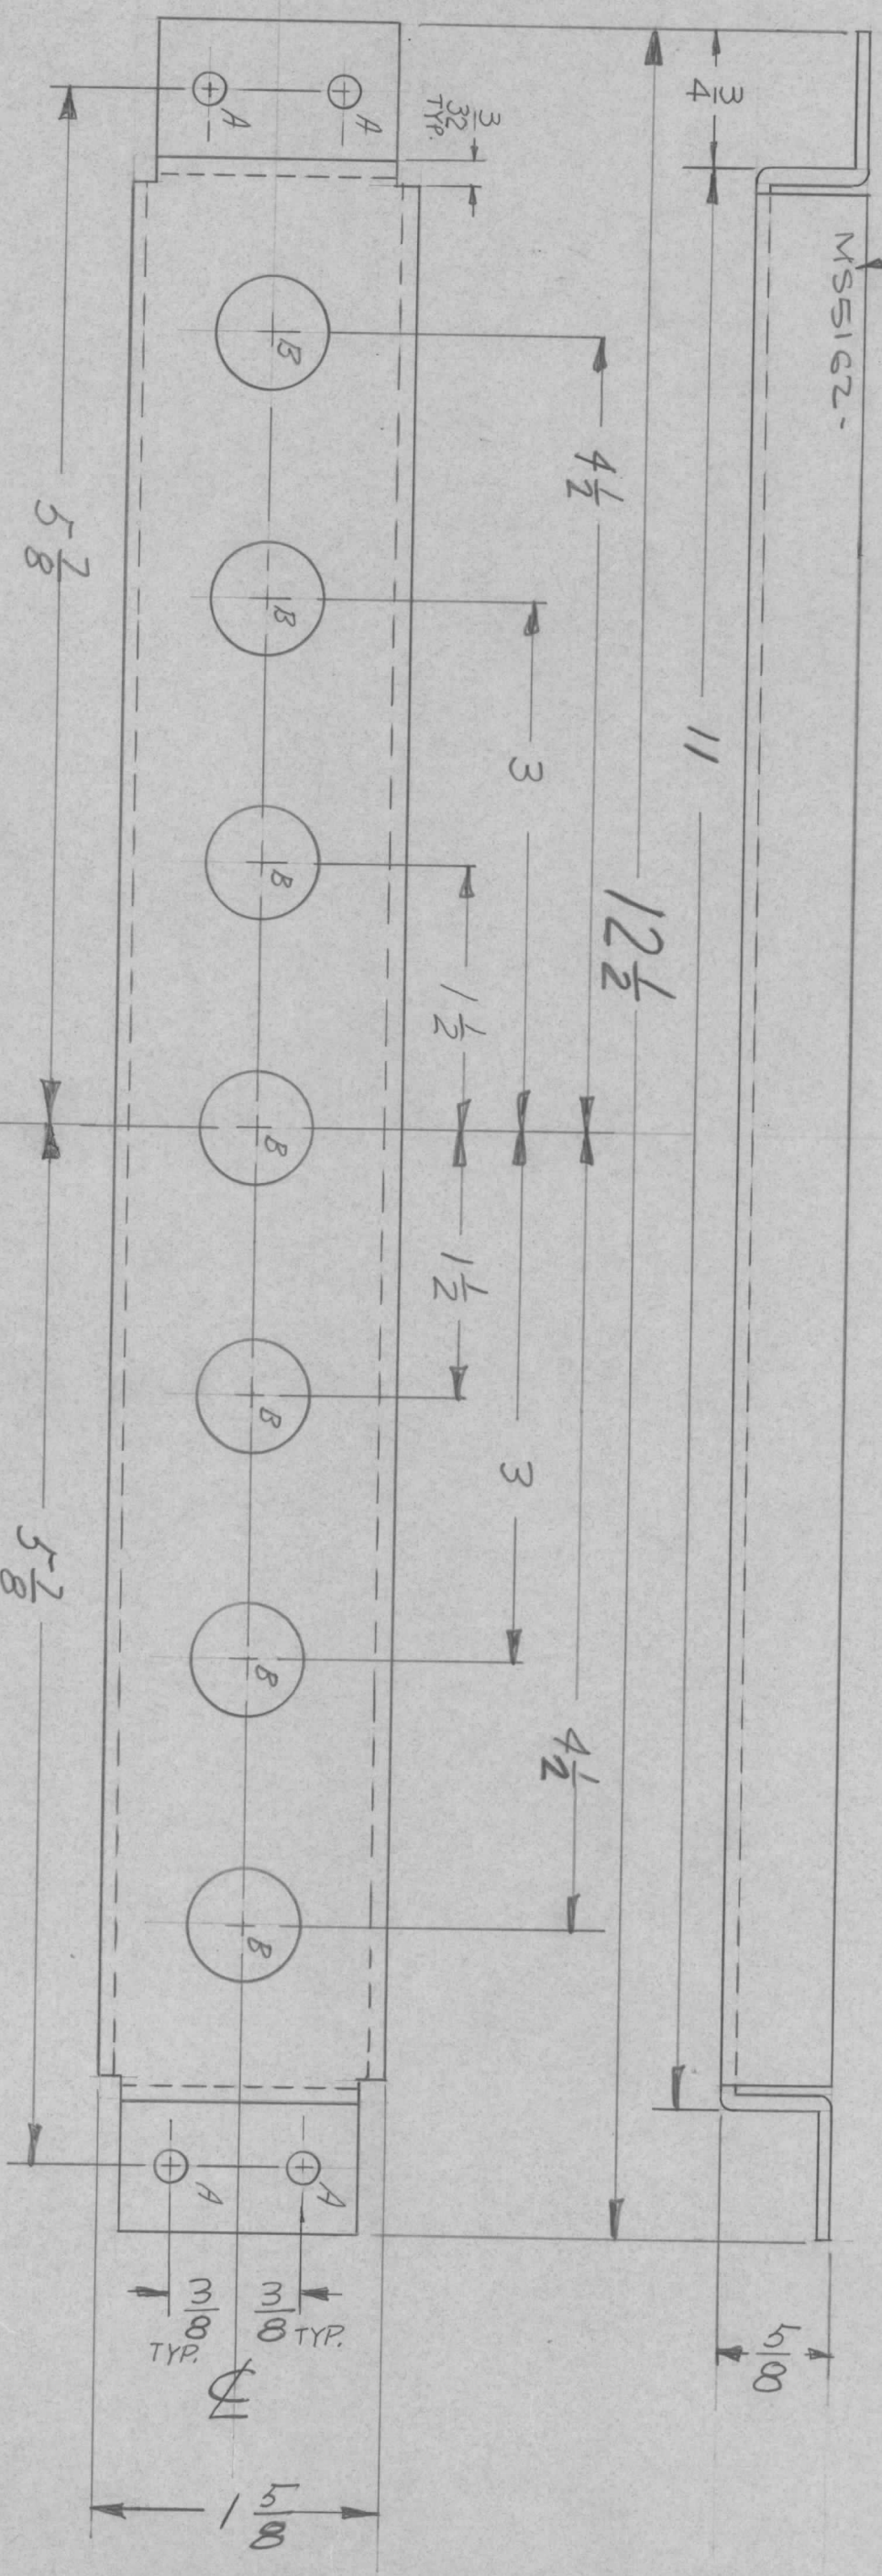

HOLE	DESCRIPTION	REQ.
A	1/4 DIA.	4
B	5/8 DIA.	7

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

QTY / UNIT: 1
 MODEL USED ON: BCT-10 KA
 ASS'Y NO.:
 APPLICATION: S401-451
 CODE: A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005
 FRACTIONS: 1/64
 TOLS. ANGLES: 0° - 30°

MATERIAL: .081 ALUMINUM
 FINISH: 5052 H32
 S404
 YELLOW IRIDITE

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
			SK3290-MS1004	

LIST OF MATERIAL

THE TECHNICAL MATERIEL CORP.
 MAMARONECK, NEW YORK

BRACKET, MTG. FUSE

SCALE: B 82679
 DWG NO.: MSS1G2
 SHEET OF