
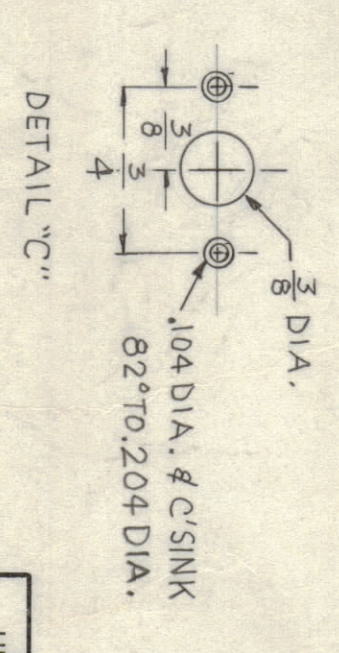


ZONE	LTR	DESCRIPTION	DATE	E. M. N. D. DRAFT	CHKD.	APPD.
X		EXP. RELEASE	10/9/47			
Ø		UNUSUAL RELEASE FOR PRODUCTION	4-1-68			
A		2" HOLES ADDED	3/21/68			
B		RELOCATE 3/8" DIA. TO BEND SECTION OF LIFT 1-7	2/25/68			

HOLE	DESCRIPTION	REQ.
A	15/64 DIA.	6
B	13/64 DIA.	10
C	SEE DETAIL	4
D	1/4 DIA.	18
E	11/64 DIA.	17
F	9/64 DIA.	4
G	1/2 DIA.	15

MARK TMC P/N 1/8 HIGH GOTHIC  
W/LATEST REV. LETTER.

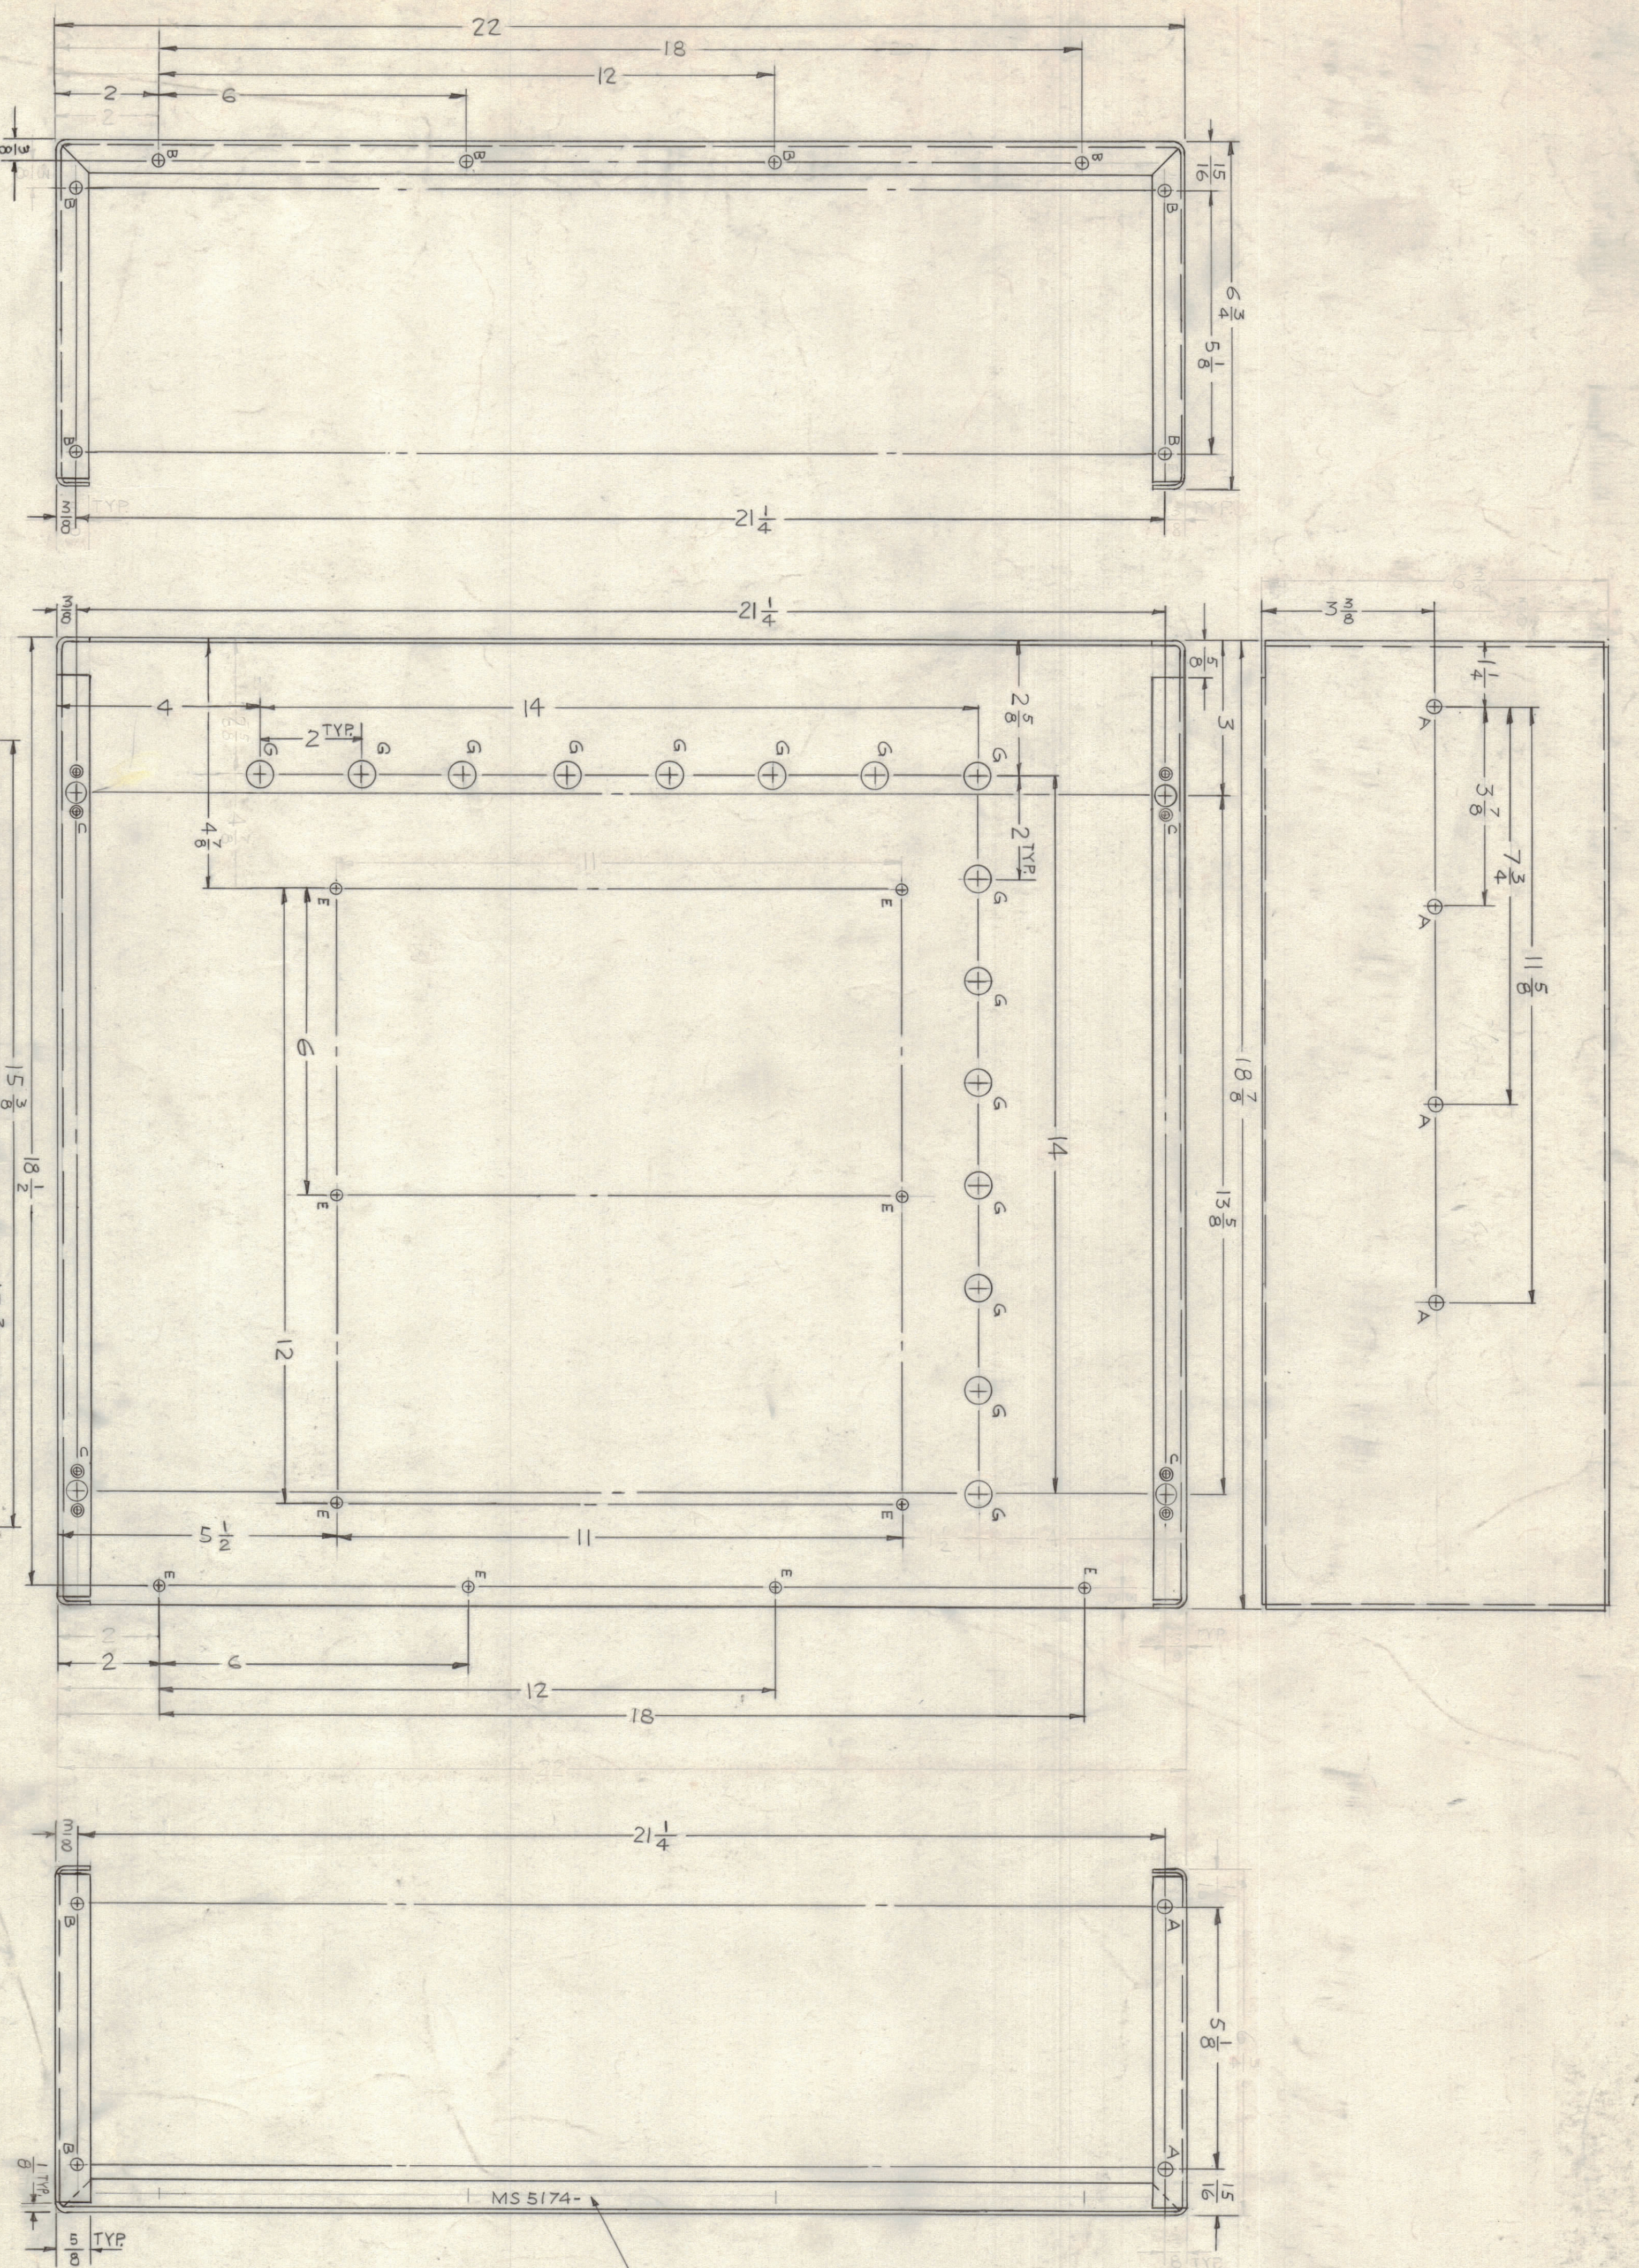

QTY / UNIT	BCT-10KA	MODEL USED ON	ASSY NO.
1			

CODE	APPLICATION
A	S401-451

TOLERANCES ON	DECIMALS	FRACTIONS
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND IN PLATED FINISHES	X ± .01	± 1/16
	XX ± .005	± 0.005
	XXX ± .005	± 0.005

FINISH	MATERIAL
S402-H32	ØB1 THK ALUM.
S404 VEL	
IRIDITE	

REF: LD 2279

QTY / ITEM	PART NO.	DESCRIPTION	SYMBOL
1		CHASSIS MAIN (LFE)	

THE TECHNICAL MATERIEL CORP.  
MAMARONECK, NEW YORK

DATE	DATE	DATE	DATE
4-1-68	4-1-68	4-1-68	10-9-67

SIZE	CODE	IDENT NO.	DWG NO.
D		82679	MS 5174

SCALE 1:2

SIZE	CODE	IDENT NO.	DWG NO.
D		82679	MS 5174

SCALE 1:2

QTY / UNIT	APPLIC.	CODE
1		A

UNLESS OTHERWISE SPECIFIED:  
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS  
2. ALL ANGULAR BENDS 90 DEGREES  
3. REMOVE ALL BURRS AND SHARP EDGES

QTY / UNIT	APPLIC.	CODE
1		A

UNLESS OTHERWISE SPECIFIED:  
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS  
2. ALL ANGULAR BENDS 90 DEGREES  
3. REMOVE ALL BURRS AND SHARP EDGES