


REVISIONS							
ZONE	LTR	DESCRIPTION	DATE	E.M.N. NO	DRAFT	CHKD	APPD
X		EXP. RELEASE	11/27/69	-	874		
Ø		ORIG. RELEASE FOR PROD	2-19-69			RG	

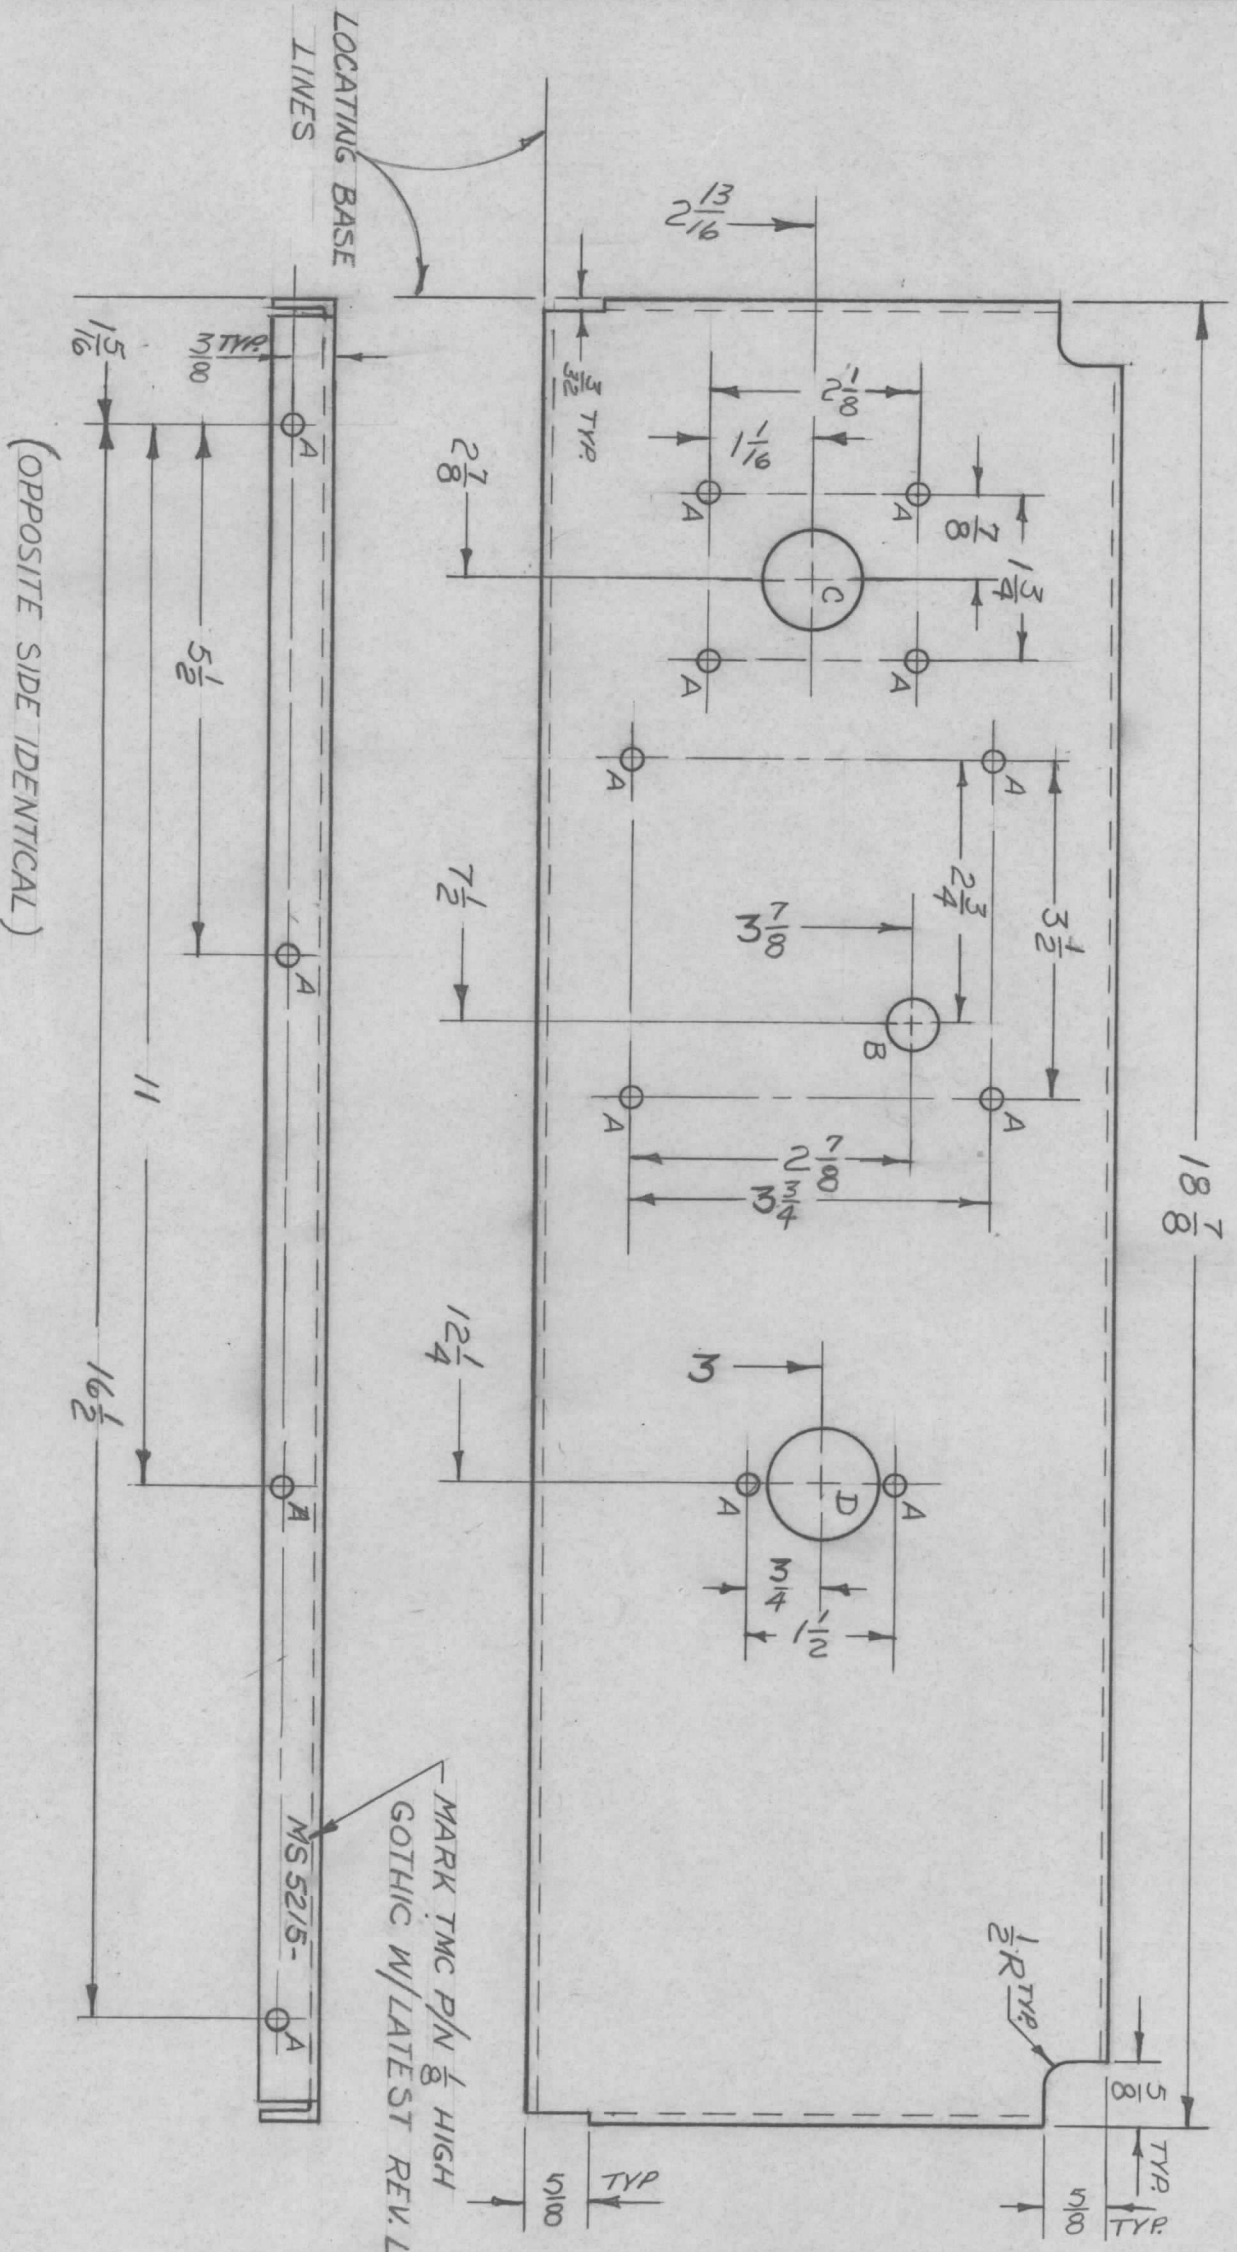

HOLE	DESCRIPTION	REQ.
A	1/64 D/A.	22
B	1/2 D/A.	1
C	1" D/A.	1
D	1/8 D/A.	1

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

QTY / UNIT	MODEL USED ON	ASSY. NO.
1	GPT-10KLF	
APPLICATION		
CODE	ASSY. NO.	
A	S 401-451	

DECIMALS	FRACTIONS
.X ± .05	1/64
.XX ± .01	ANGLES
.XXX ± .005	0° .30'
MATERIAL. 0.081 THK.	
ALUMINUM	
5052 H32	
FINISH	
S404 YELLOW IRIDITE	

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
	F. BUDETTI	LIST OF MATERIAL SK 6004 - MS 2206	
FINAL APPROVAL	DATE	THE TECHNICAL MATERIEL CORP.	
MECH DES.	2/19/69	MAMARONECK, NEW YORK	
ELECT. DES.	2-17-69	CHASSIS, POWER SUPPLY	
CHECKED	DATE	SIZE	CODE IDENT. NO.
DRAWN	DATE	B	82679
	1/18/67	SCALE	DWG NO.
		1:2	MS 5215
			ISSUE
			Ø

MARK TMC P/N 1/8 HIGH
GOthic W/LATEST REV LETTER

(OPPOSITE SIDE IDENTICAL)