


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N. NO	DRAFT	CHKD
	X1	EXP. RELEASE	11/15/67		Emp	Emp
	X1	3/32 ADDED, 3/8 WAS 1/4	12-13-67		Emp	Emp
	X2	LIP REVERSED	12/14/67		Emp	Emp
	Ø	ORIGINAL RELEASE FOR PRODUCTION	4/2/68		Emp	Emp

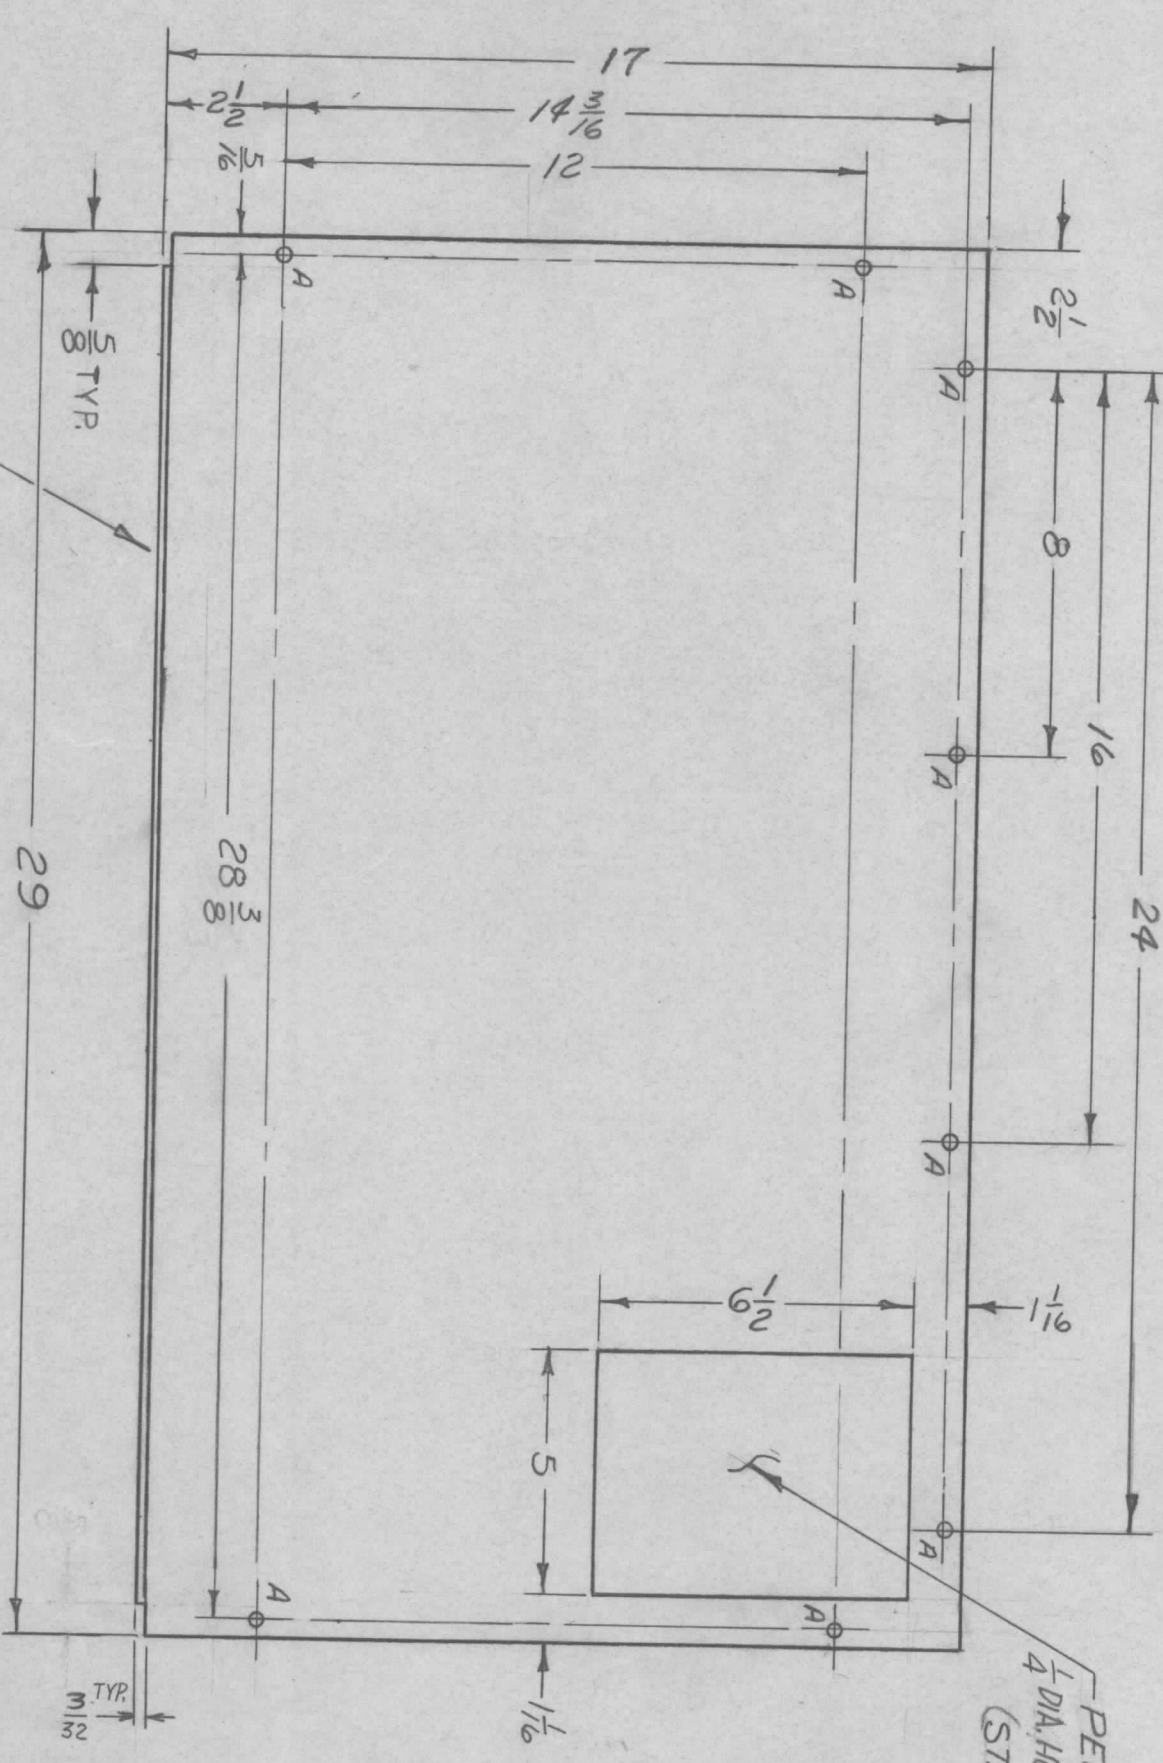

HOLE	DESCRIPTION	REQ.
A	1/4 DIA.	8

MARK TMC P/N (MS 5238 -)  
 1/8 HIGH GOTHIC W/LATEST  
 REV. LETTER ON REAR

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

QTY / UNIT	1	MODEL USED ON	BCT-10KA	ASS'Y NO.	AX 683
APPLICATION		CODE	A	S401-451	

DECIMALS	X ± .05	TOLS.	1/64
	.XX ± .01	ANGLES	0° - 30'
	.XXX ± .005		

FINISH S 404  
 YELLOW TRIDITE

REQ'D ITEM	8	2	FS 110 - 1	STUD, TURN LOCK	A
	8	1	FS 109 - 3	RING, RETAINING	A

LIST OF MATERIAL SK 3290 - MS 5029			
THE TECHNICAL MATERIEL CORP.			
MAMARONECK, NEW YORK			
SIZE	B	CODE IDENT. NO.	82679
DWG. NO.		MS 5238	
SCALE	1:4	SHEET	1 OF 1

COVER, TOP