


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	Ø	ORIG. RELEASE FOR PROD.	6-14-68	Ø	P.S.	/// H.S.
A		ADD. 2 SLOTS, RELOCATED 'A' HOLE	5-18-71	20353	R.T.	W. Bred
B		CHG. 5/8 NOTCH TO 3/4 NOTCH	3-3-72	20546	GE	G. G.
C		ONE 'A' HOLE ADDED	9-26-74	21176	GDL	G. G.

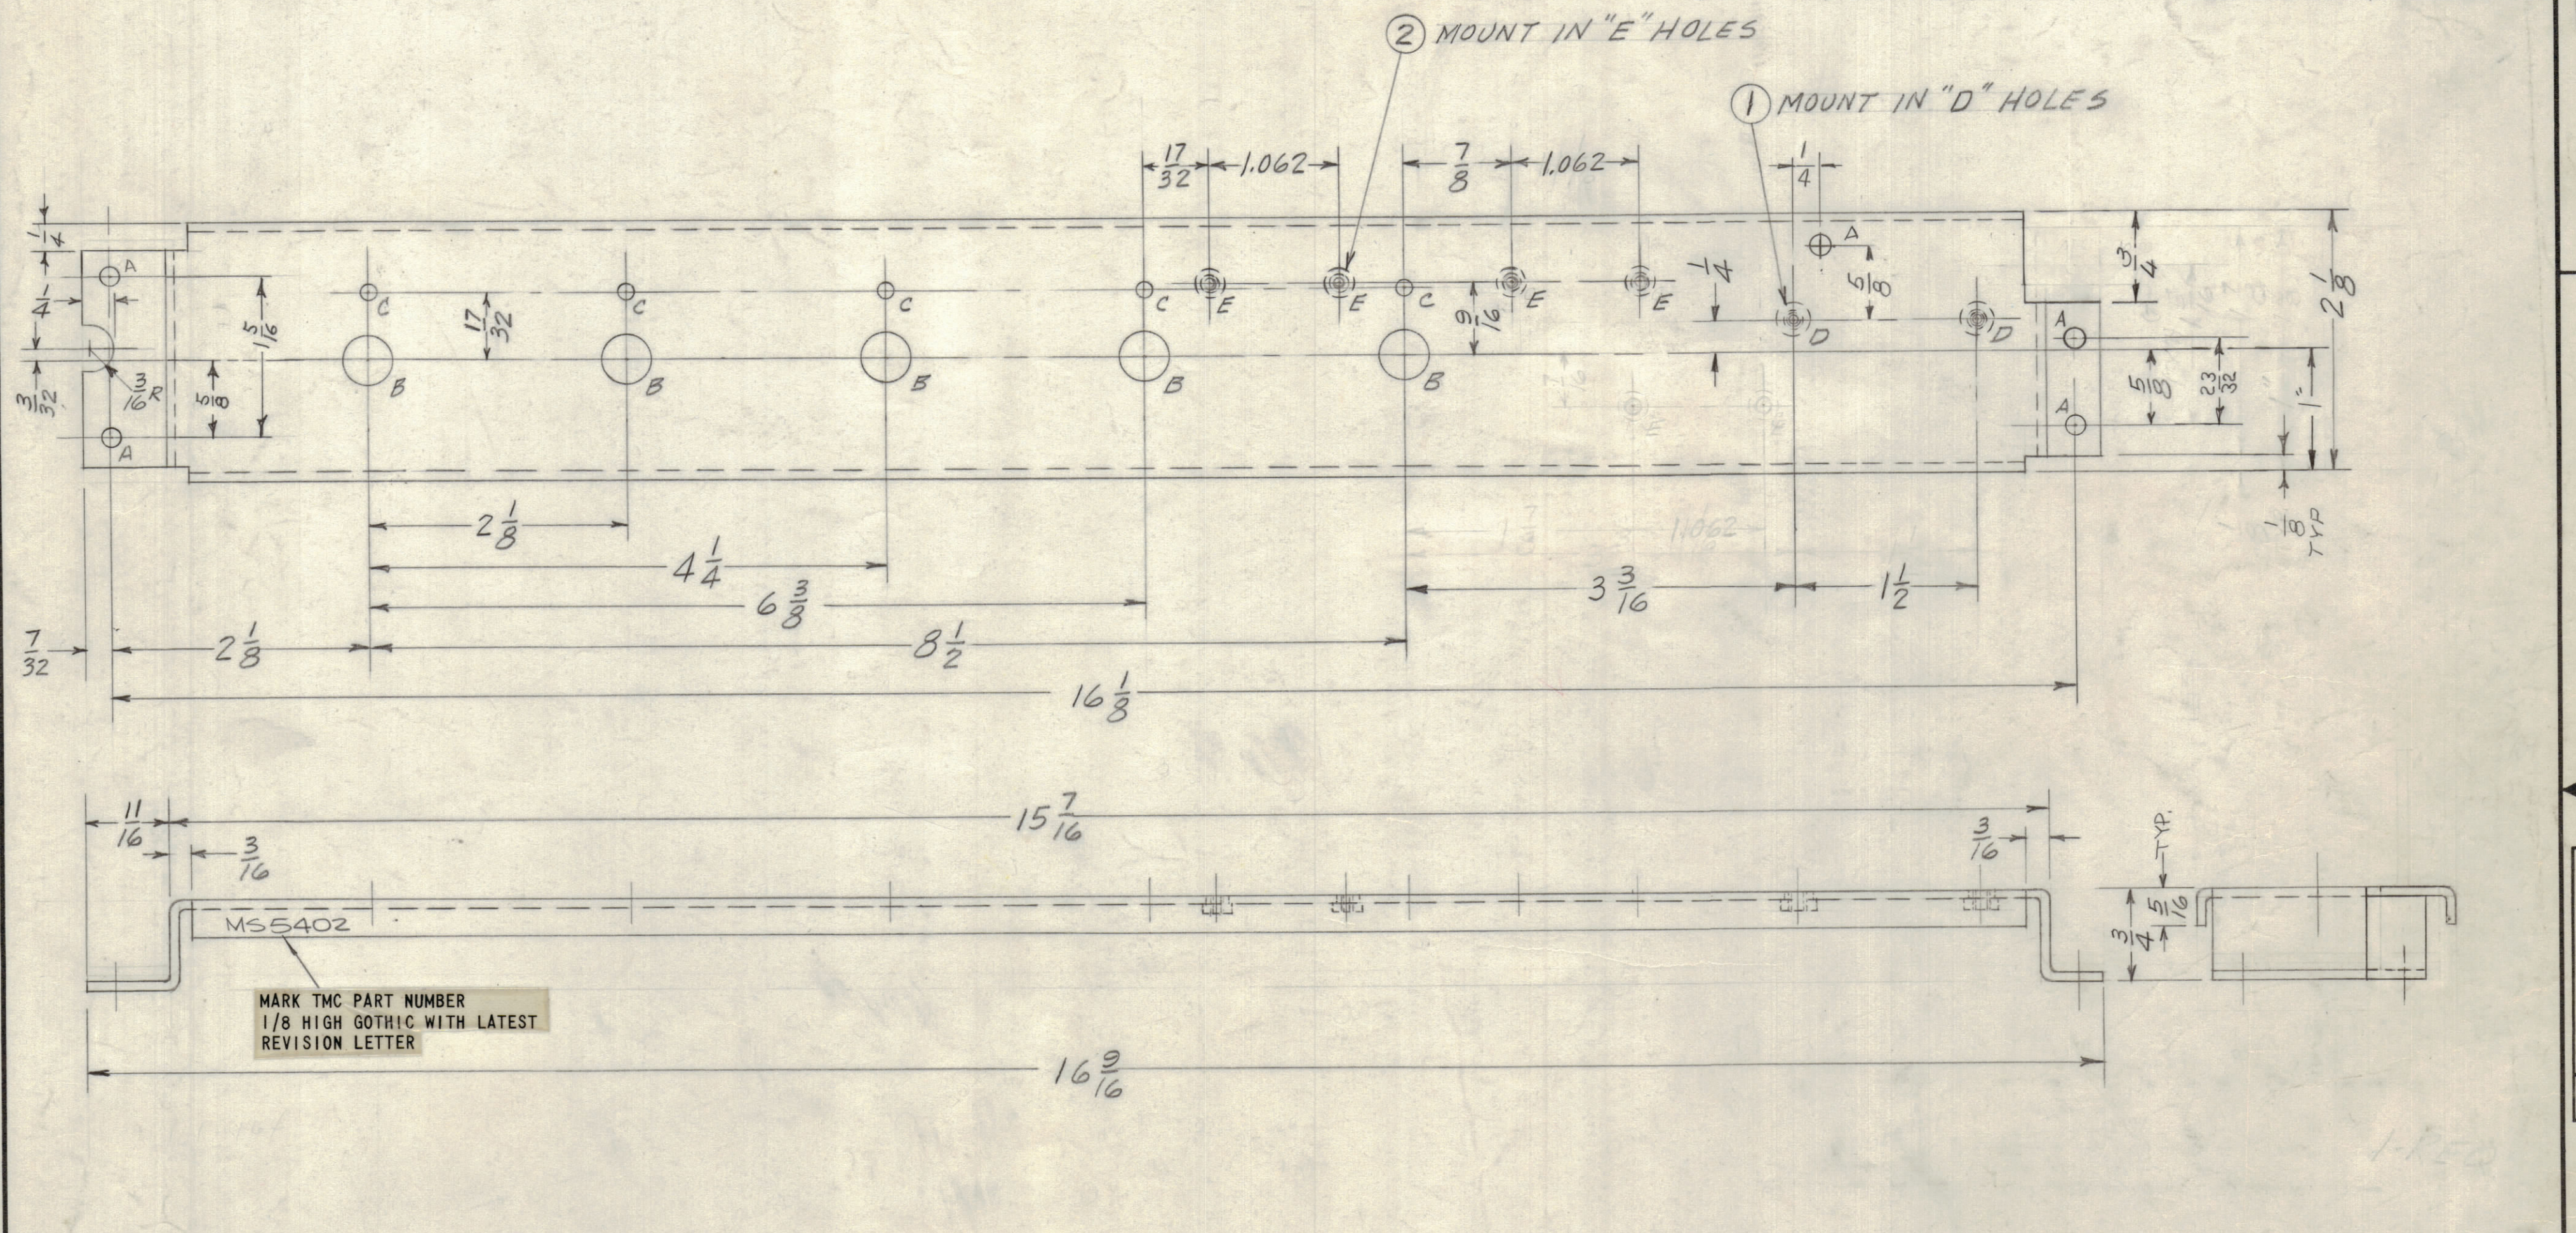

- HOLES**
A - 11/64 DIA. - 5 REQ.
B - 13/32 DIA. - 5 REQ.
C - 9/64 DIA. - 5 REQ.
D - .191-.194 DIA. - 2 REQ.
E - .161-.164 DIA. - 4 REQ.

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
4	2	NT129-440-4	NUT, PLN, SPLINE	E
2	1	NT129-632-4	NUT, PLN, SPLINE	D

LIST OF MATERIAL SK3246 MS10C

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

BRACKET, MOUNTING, SWITCH

FINAL APPROVAL S.A.M.	DATE 6-13-68
MECH. DES. [Signature]	DATE 6-13-68
ELECT. DES. [Signature]	DATE 6-13-68
CHECKED [Signature]	DATE 6-13-68
DRAWN D.A.C.	DATE 6-10-68

SIZE	CODE IDENT.NO.	DWG NO.	ISSUE
C	82679	MS5402	C

SCALE 1:1 SHEET OF

UNLESS OTHERWISE SPECIFIED:

- USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
- ALL ANGULAR BENDS 90 DEGREES
- REMOVE ALL BURRS AND SHARP EDGES
- MOUNT INSERTS AFTER FINISHING

1	MMX-1M	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
	APPLICATION	
	CODE A	S401-451

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON

DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° -30'

MATERIAL, 081 ALUMINUM
5052-H 32

FINISH
5404 YEL. IRIDITE