


APPLICATION

REVISIONS

QTY	MODEL USED ON	ASS'Y NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
1	MMX-1M		Ø	ORIG. RELEASE FOR PROD.	6-14-68	Ø	R.G.		Jde

MARK TMC PART NUMBER
1/8 HIGH GOTHIC WITH LATEST
REVISION LETTER

9/64 DIA. 4 HOLES

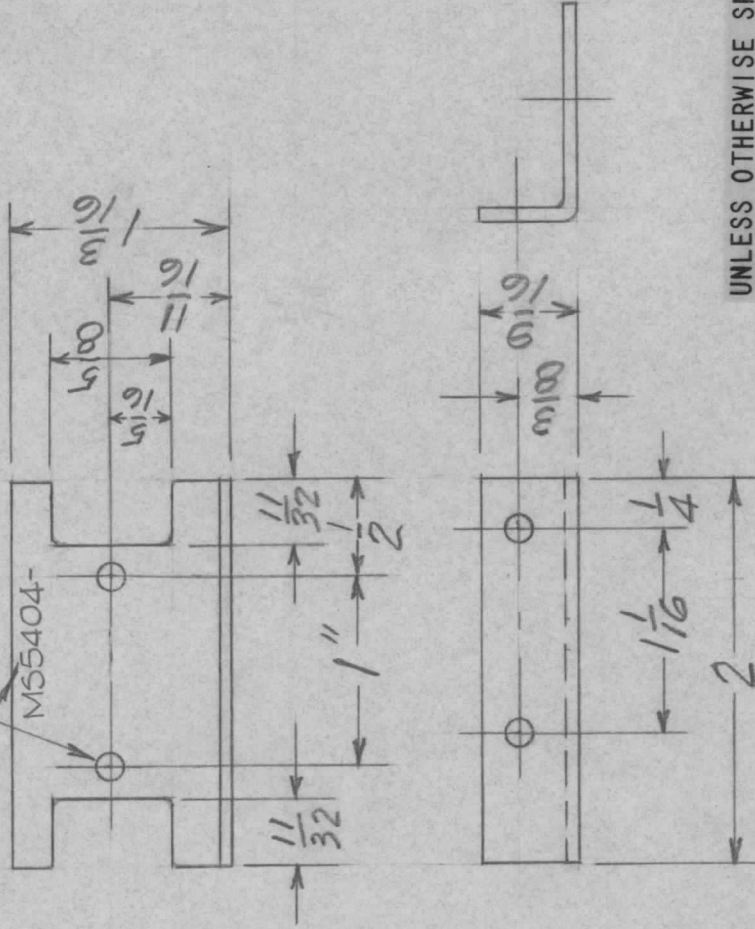

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
O. POSE		LIST OF MATERIAL	SK3246MS 12C
FINAL APPROVAL		THE TECHNICAL MATERIEL CORP.	
MECH. DES.		MAMARONECK, NEW YORK	
ELECT. DES.		BRACKET, MTG., FILTER	
CHECKED			
DRAWN			

DATE	DATE	DATE	DATE	DATE
6-10-68	6-14-68	6-13-68	6-10-68	6-10-68

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS FRACTIONS
X ± .05 1/64
.XX ± .01 ANGLES
.XXX ± .005 0°-30'

MATERIAL 063 ALUM.
5052 H 32

FINISH
5404 YEL. IRIDITE
S401-451

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	M55404	Ø
SCALE	1:1	SHEET	OF

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.