


MS 5676-1 AS SHOWN
 MS 5676-2 OPPOSITE HAND

REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N. NO	DRAFT	CHKD
	Ø	ORIGINAL RELEASE	10/21/70		Ø	

HOLE CHART
 4 - .161 - .164 DIA. - (2 REQ)

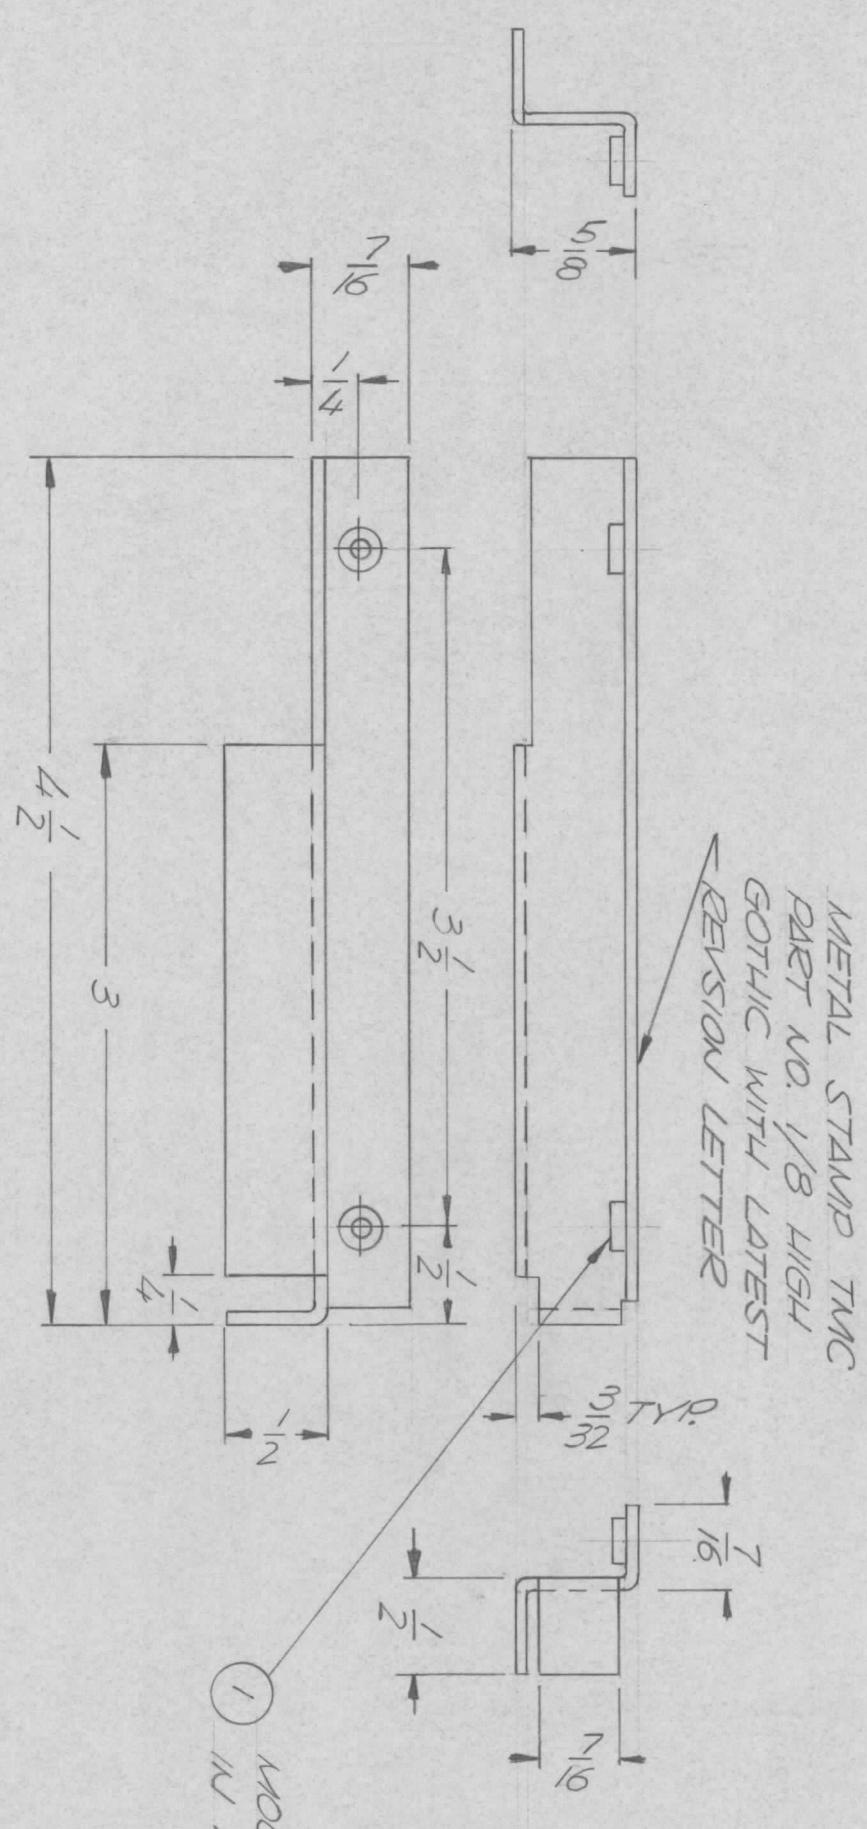

1 MOUNT ITEM 1 AS SHOWN IN ALL 4 HOLES (2 REQ)

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

QTY / UNIT	1	MODEL USED ON	HELM 1K	ASS'Y NO.	BMA 45L
APPLICATION		CODE			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005

FRACTIONS: 1/64

ANGLES: 0° - 30'

MATERIAL: .064 ALUM

FINISH: 5404 VEL IRIDITE

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
2	1	KT129-440-L NUT ROUND SWAGE TYPE	A

0. POSE

LIST OF MATERIAL

THE TECHNICAL MATERIEL CORP.
 MAMARONECK, NEW YORK

BRACKET MTG. FILTER

DATE: 20/2/70

MECH. DES. DATE: 20/2/70

ELECT. DES. DATE: 20/2/70

CHECKED DATE: 20/2/70

DRAWN DATE: 20/2/70

SIZE: B

CODE IDENT. NO.: 82679

DWG NO.: MS 5676

SCALE: 1:1

SHEET: OF

ISSUE: Ø

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown herein without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.