


APPLICATION

QTY	MODEL USED ON	ASS'Y NO.	LTR
1	AX5127	AX5127	X

REVISIONS

DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
RELEASED FOR EXP.	11/17/70		RJ		
ORIGINAL RELEASE	11/18/70		(S)		

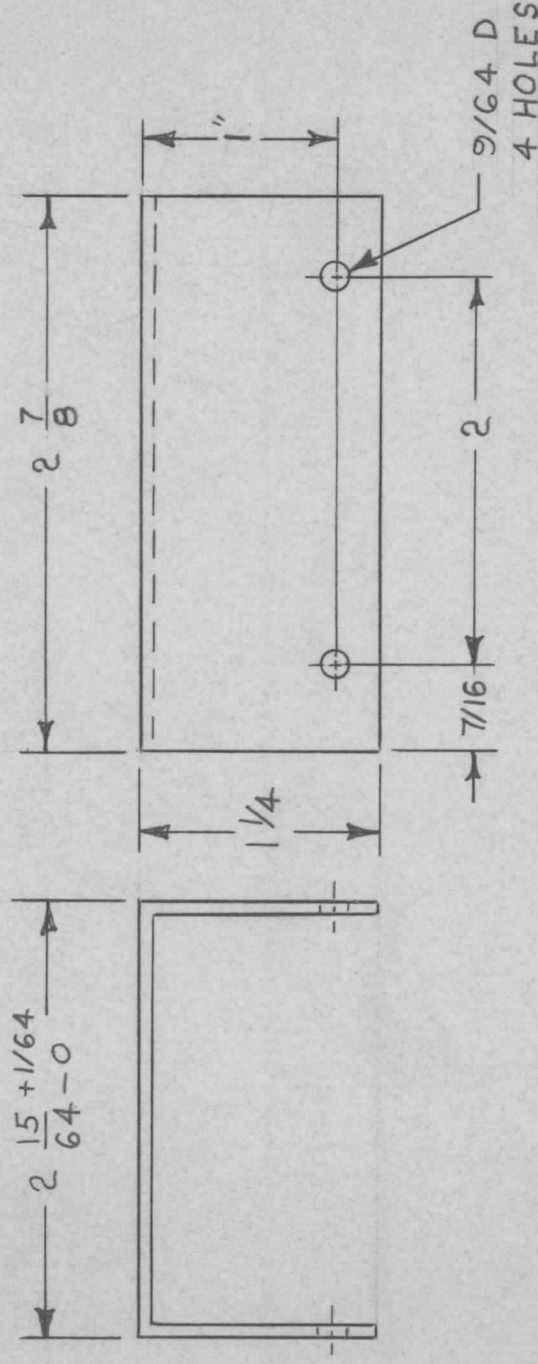

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
AND INCLUDE CHEMICALLY APPLIED
OR PLATED FINISHES

DECIMALS
X ± .05
.XX ± .01
.XXX ± .005

FRACTIONS
1/64
ANGLES
0°-30°

MATERIAL .057 ALM.
5052-H 52

FINISH
IRIDITE

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
POSE		LIST OF MATERIAL	
FINAL APPROVAL <i>Pose</i>	DATE 11/17/70	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
MECH. DES. <i>ave</i>	DATE 11/17/70		
ELECT. DES.	DATE		
CHECKED	DATE		
DRAWN <i>R. Yorlano</i>	DATE 11/17/70	COVER	
NOTICE TO PERSONS RECEIVING THIS DRAWING		SIZE	ISSUE
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		A	Ø
		CODE IDENT. NO.	
		82679	
		DWG NO.	
		MS 5697	
		SCALE	SHEET
		1:1	1 OF 1