


HOLE LEGEND		
HOLE	DESCRIPTION	REQ.
A	7/64 DIA.	6
B	9/16 DIA.	1
*C	.189 DIA.	4
D	7/32 DIA.	2

MS6017

SYMBOL		DESCRIPTION		DATE	EM.N. NO.	DRAFT	CHKD	APPD
X		EXPERIMENTAL RELEASE		11/11/66	X	RME	RTS	
X1		ONE "C" HOLE RELOCATED TWO "D" HOLES ADDED		1-20-67	X1	G.D.L		
X2		NOTE ADDED - NOT TO ANODIZE ENDS		3-16-67	X2	G.D.L		
Ø		ORIGINAL RELEASE FOR PRODUCTION		6-26-67	Ø	R.G		
A		HOLE (B) 9/16 WAS 1-3/4 : HOLE LEG. UPDATED		2-7-69	19316	GE	DB	OP
B		NOTE ADDED: DO NOT ANODIZE 5/16 AROUND Ø OFFIHS		12-11-72	20964	GE	DB	OP

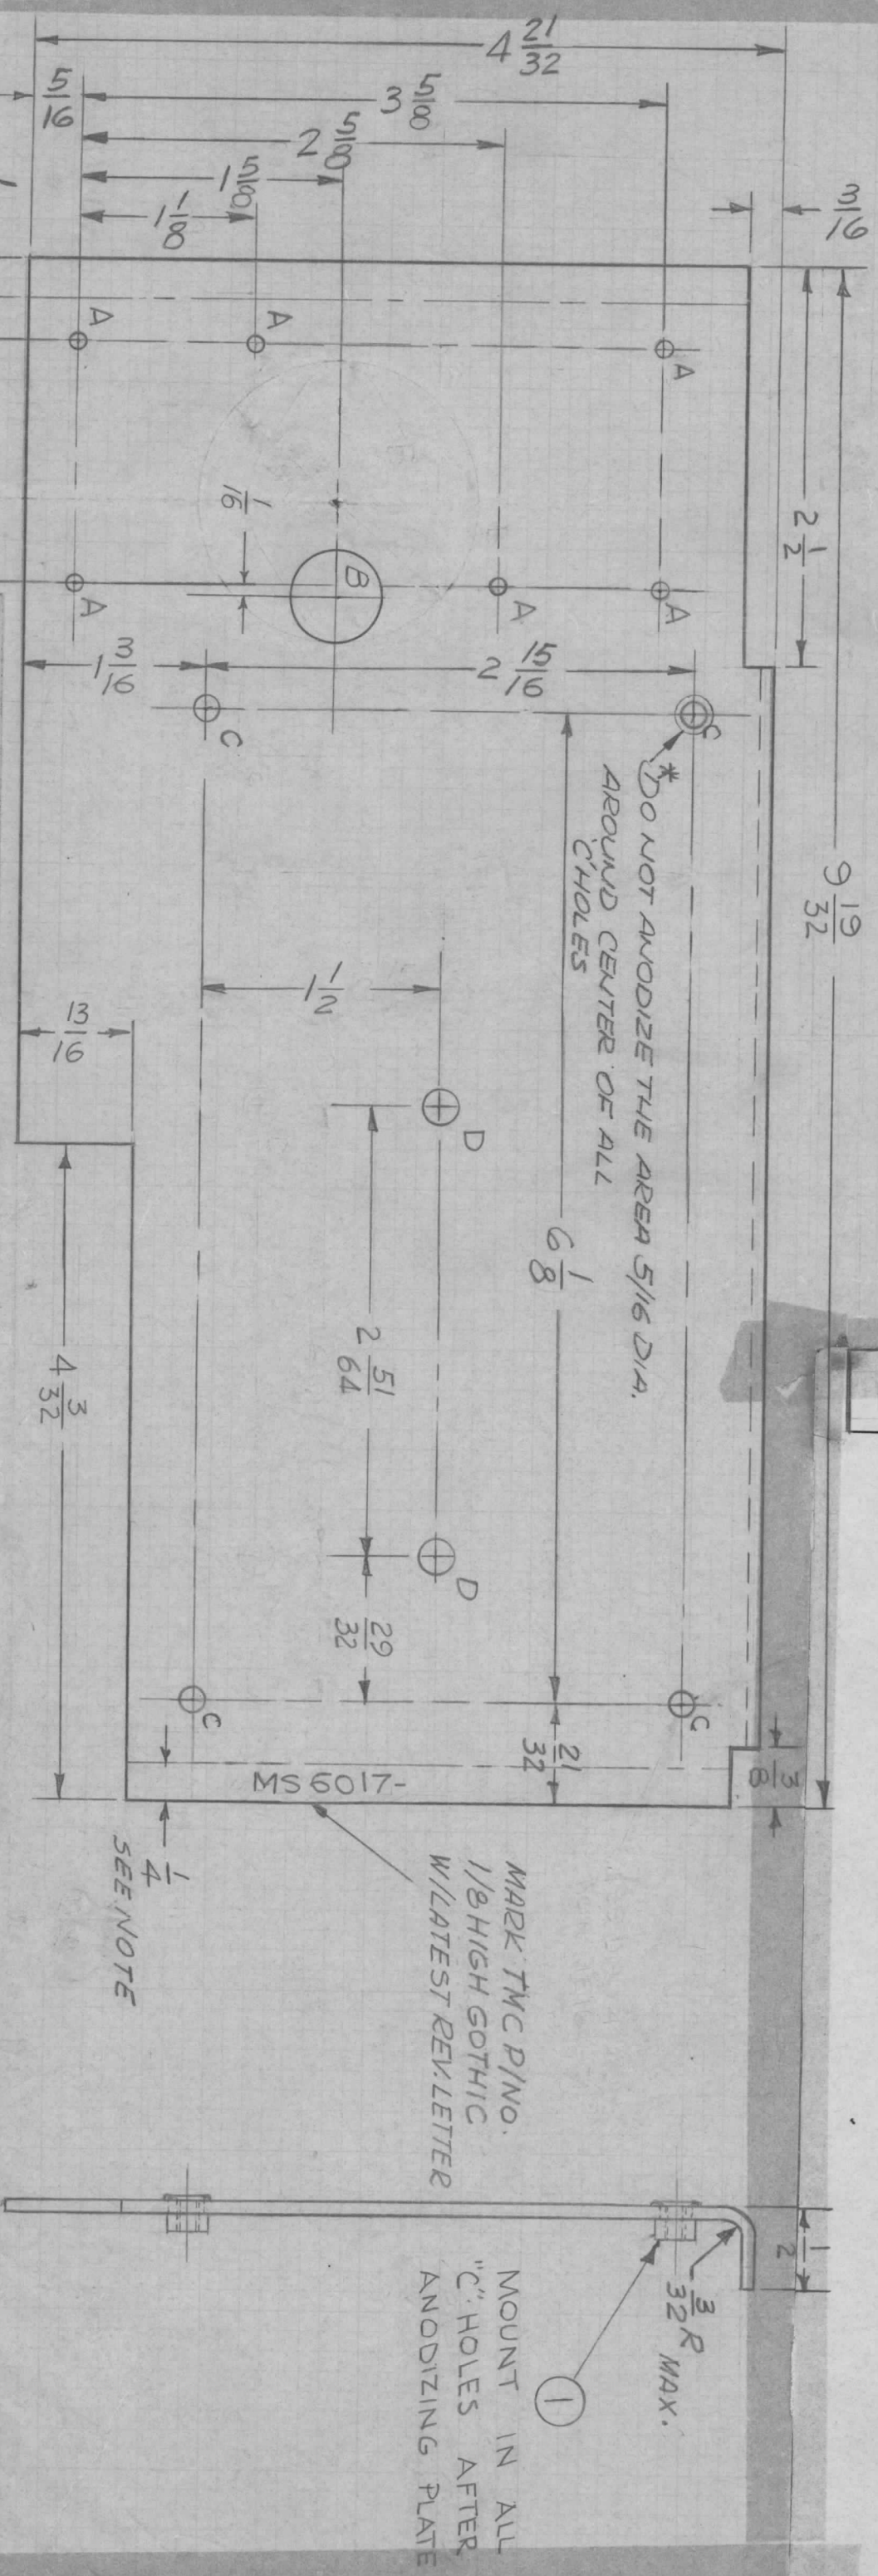

NOTE:  
DO NOT BLACK ANODIZE  
1/4 FROM EACH END  
ON BOTH SIDES

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
  2. ALL ANGULAR BENDS 90 DEGREES
  3. REMOVE ALL BURRS AND SHARP EDGES
  4. MOUNT INSERTS AFTER FINISHING

NOTES

Q'TY./UNIT	1	MODEL USED ON	MMX-1	ASS'Y. NO.	A4502
SCALE	1:1	CODE	A	SAOI-4SI	

REQ'D.	4	ITEM	1	PART NUMBER	TE164-7
MATERIAL					
.091 THK. ALUMINUM					
5052-H32					
FINISH					
5/20 BLACK ANODIZE					
EXCEPT WHERE OTHERWISE SHOWN					

DRAWN		DATE	FINAL APPROVAL	DATE
CHECKED		DATE		
ELECT. DES.		DATE		
MECH. DES.		DATE		
TITLE				
HEAT SINK & P.C. CARD HOLDER				
LIST OF MATERIAL				
REF.	SK 3213	MS 55	SYMBOL	
THE TECHNICAL MATERIEL CORP.				
MAMARONECK, NEW YORK				

MS6017

REV. LTR.