


NOTE - 1. PRIOR TO FINISHING, REMOVE SURFACE IMPERFECTIONS USING A FINE ABRASIVE.
 2- CAUSTIC ETCH.
 3- ANODIZE PER MIL-A-8625, TYPE II, SULPHURIC ACID.

REQ. PER UNIT	USED ON			MSG033	A
	MODEL	ASS'Y. NO.	DATE		
1	RTPH-()		11-28-66		

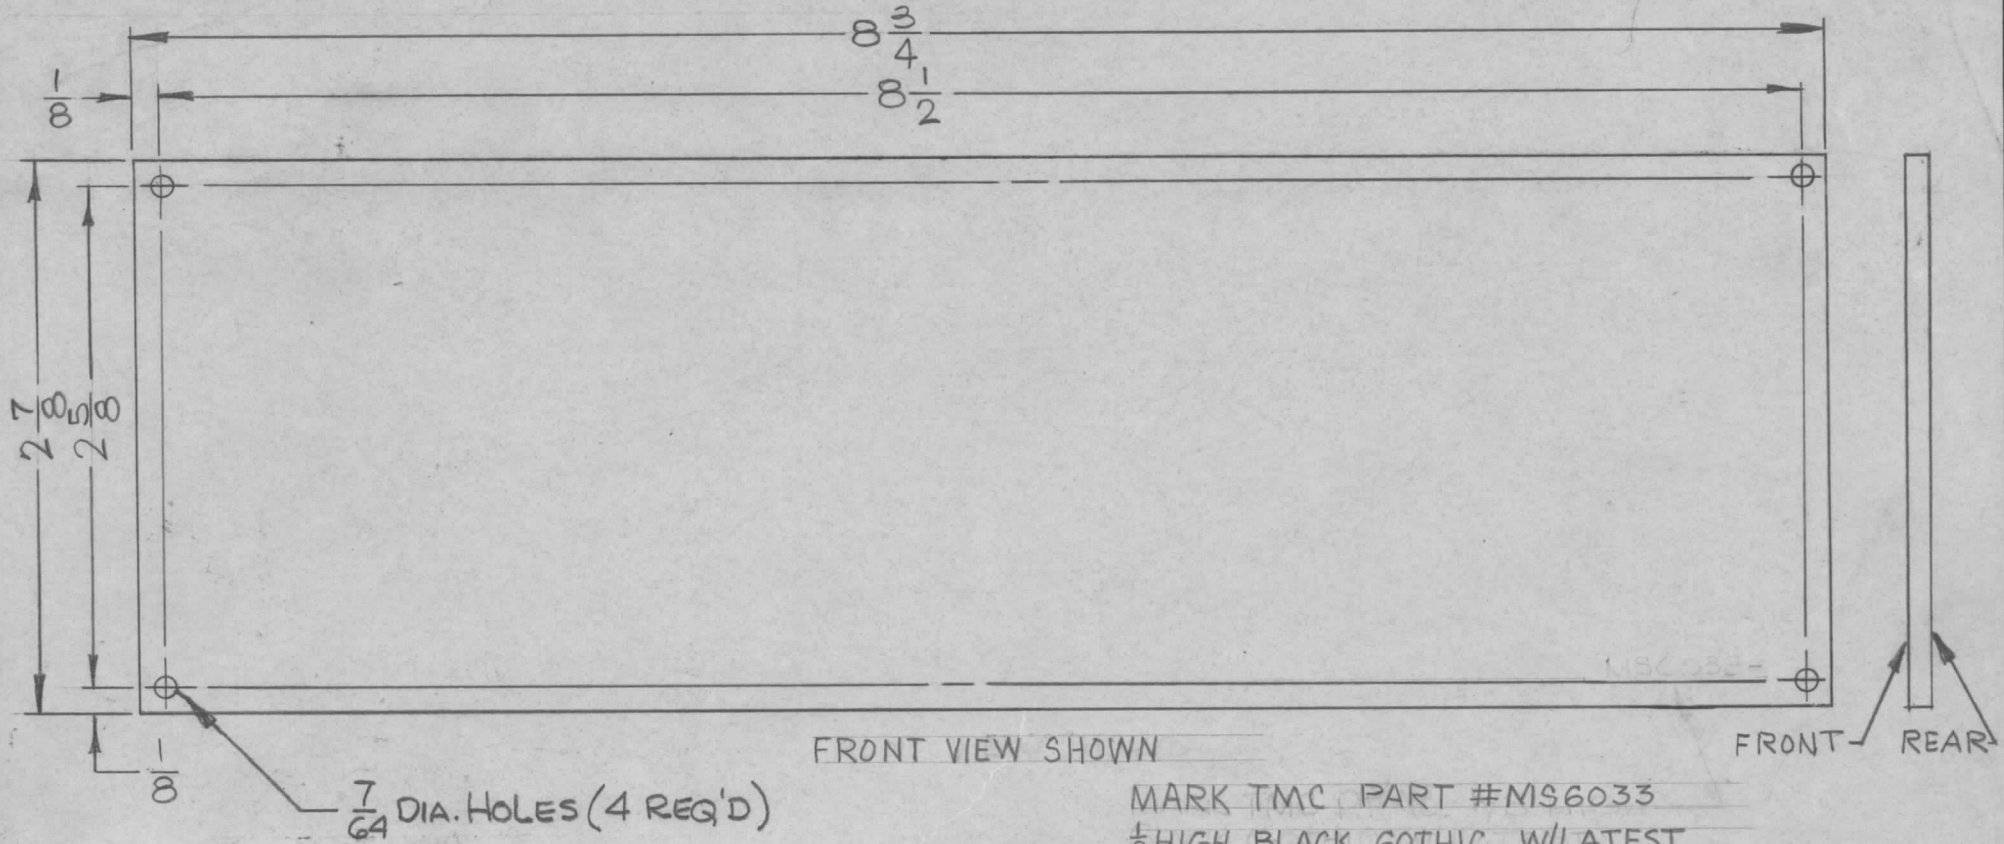

MARK TMC PART #MS6033
 $\frac{1}{8}$ HIGH BLACK GOTHIC W/LATEST
 REV. LETTER ON REAR OF PLATE.

REF: LD 2189, LD 2351

A	REF DATA ADDED	5/19/69	19429	GE	HQ	SDM	REQ. ITEM	PART NO.	F. EATON	DESCRIPTION	SYMBOL
Ø	ORIG. RELEASE	12-4-67			SG	HQ	.031		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X ₁	TMC P/N WAS ON FRONT	11-6-67				B/B	STOCK SIZE		PLATE, PUSHBUTTON		
X	EXPERIMENTAL RELEASE	11-28-66			HGA		ALUMINUM		CHART		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE					5052-H32		H. AUSTIN	SG 11/6/67	J. Di Marco 12/3/68
		1:1					TYPE & TEMPER		DRAWN		FINAL APPROVAL
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE		SEE NOTES		MS6033 A	
						FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.	