REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS6037	Ø
	SMEA-1		11·19·66		

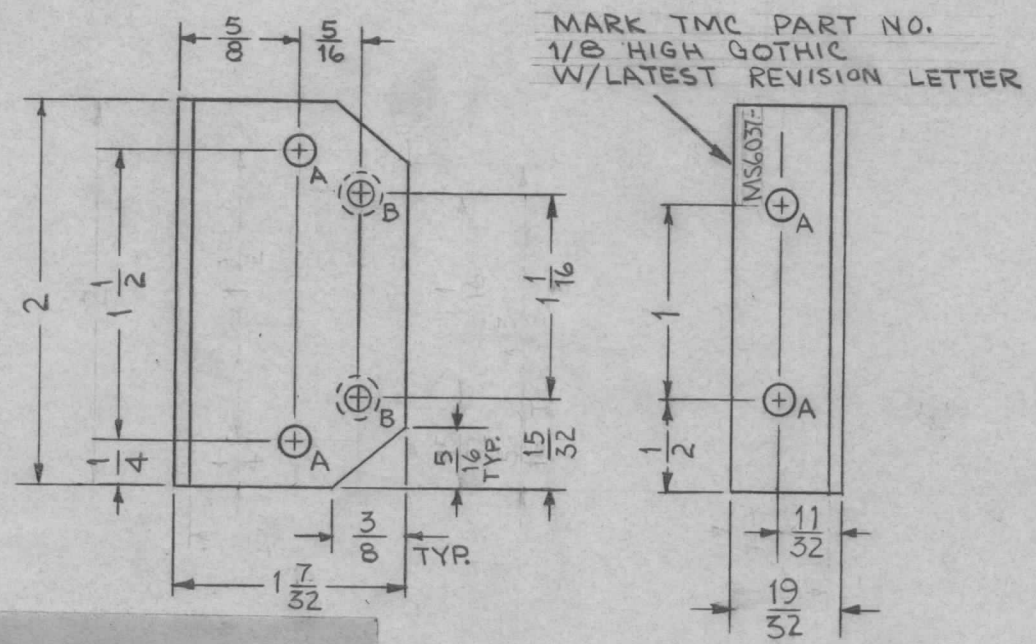

HOLE LEGEND		
HOLE	DECRIPTION	REQ.
A	5/32 DIA.	4
B	#31 DRILL .120 D. THRU, C'SK 82° TO .230 DIA.	2

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIG REL FOR PROD	4/3/67	Ø	CV		
X	EXPERIMENTAL RELEASE	11·19·66	X	RME		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30′

SCALE 1:1

CODE

REQ.	ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL
.081 THK.					
STOCK SIZE			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
ALUMINUM			BRACKET, MOUNTING, FILTER, RELAY		
MATERIAL					
5052-H32			RME		
TYPE & TEMPER	HEAT TREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL
5404 YEL. IRIDITE					MS6037 Ø
FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.	

TMC FORM 108-A

REPROVEL NO. 440H 21540