


REQ. PER UNIT	USED ON		MS6043 ϕ
	MODEL	ASS'Y. NO.	
1	RAK-110-2		12-3-66

HOLES

- A - 15/64 DIA. (4 REQ.)
- B - 1/4 X 1/2 SLOTS (4 REQ.)

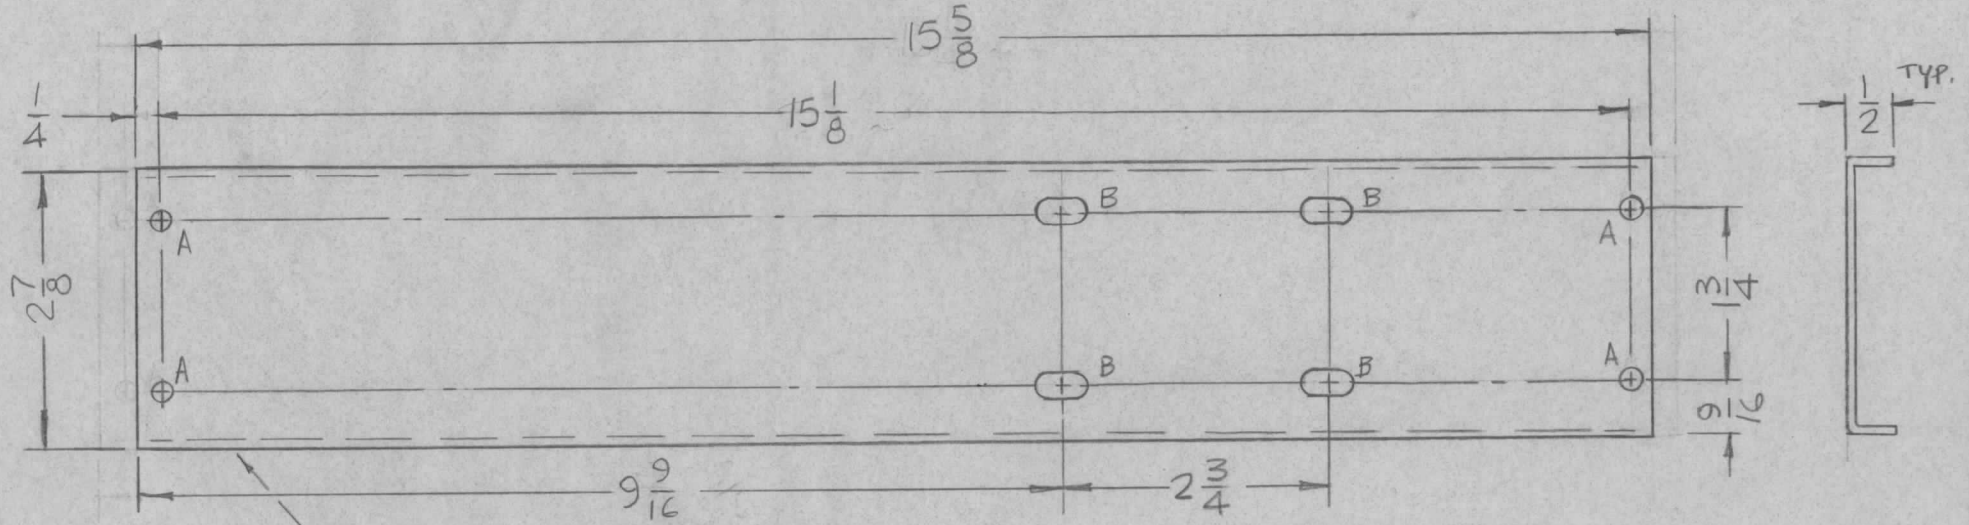

MARK TMC P/N (MS6043)
 1/8" HIGH GOTHIC W/LATEST
 REV. LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

							REQ. ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
								1/8 THICK		THE TECHNICAL MATERIEL CORP.	
								STOCK SIZE		MAMARONECK.	NEW YORK
ϕ	ORIGINAL RELEASE FOR PRODUCTION	3-1-67	#	4/10				ALUMINUM		PLATE, SUPPORT COUPLER	
X	EXP. RELEASE	12-3-66		1/20		09		MATERIAL			
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.				
TOLERANCES		SCALE: 1:2		5052-H32					2/28/67		
DEC. DIM. \pm	MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.		TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
FRAC. DIM. \pm	REMOVE ALL BURRS AND SHARP EDGES		S404 YEL. IRIDITE								
ANGULAR DIM. \pm			FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS6043 ϕ				