

APPLICATION

QTY MODEL USED ON ASS'Y NO. LTR

8 CUG-3


A

REVISIONS

DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
ORIGINAL RELEASE FOR PROD	7/10/67	8	CV		
MS6065-1,2,3,ADDED	9/11/67	20219	W.	Q1	PSA

HOLE	DESCRIPTION	REQ
A	.161-.164 DIA	2
B	1/8 DIA	2

PART NUMBER	A	B	C
MS6065-1	11/32	3/8	1-1/2
MS6065-2	9/16	15/32	1-11/16
MS6065-3	25/32	19/32	1-15/16

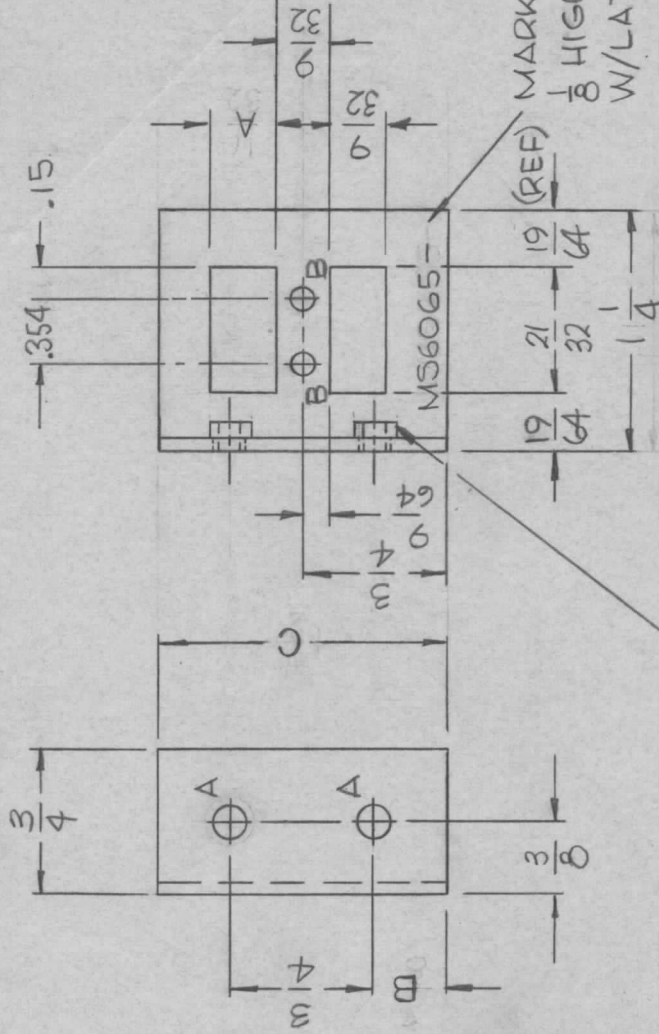

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

MOUNT ITEM 1 IN ALL A HOLES AS SHOWN

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
2	NT129-440-4	NUT, ROUND, SWAGE TYPE	A

LIST OF MATERIAL

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

DATE	DATE
7/11/67	7/11/67
MECH. DES.	ELECT. DES.
CHECKED	DRAWN

FINISH S404 YEL IRIDITE

BKLT, SUPPORT, RELAY

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
A	82679	MS6065	A
SCALE		SHEET	OF

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.