


| REVISIONS | | | | | | |
|-----------|-----|---------------------------------|---------|------------|-------|--------|
| ZONE | LTR | DESCRIPTION | DATE | E.M.N. NO. | DRAFT | CHKD |
| B/D-5 | X1 | EXP. RELEASE | 2-13-67 | | | |
| | | SIDE VIEW REVERSED | 3-1-67 | | | |
| | | ORIGINAL RELEASE FOR PRODUCTION | 3-1-67 | | | L.R.K. |

HOLE:
 A ~ 11/64 DIA. (2 REQ.)
 B ~ 13/64 DIA. (1 REQ.)

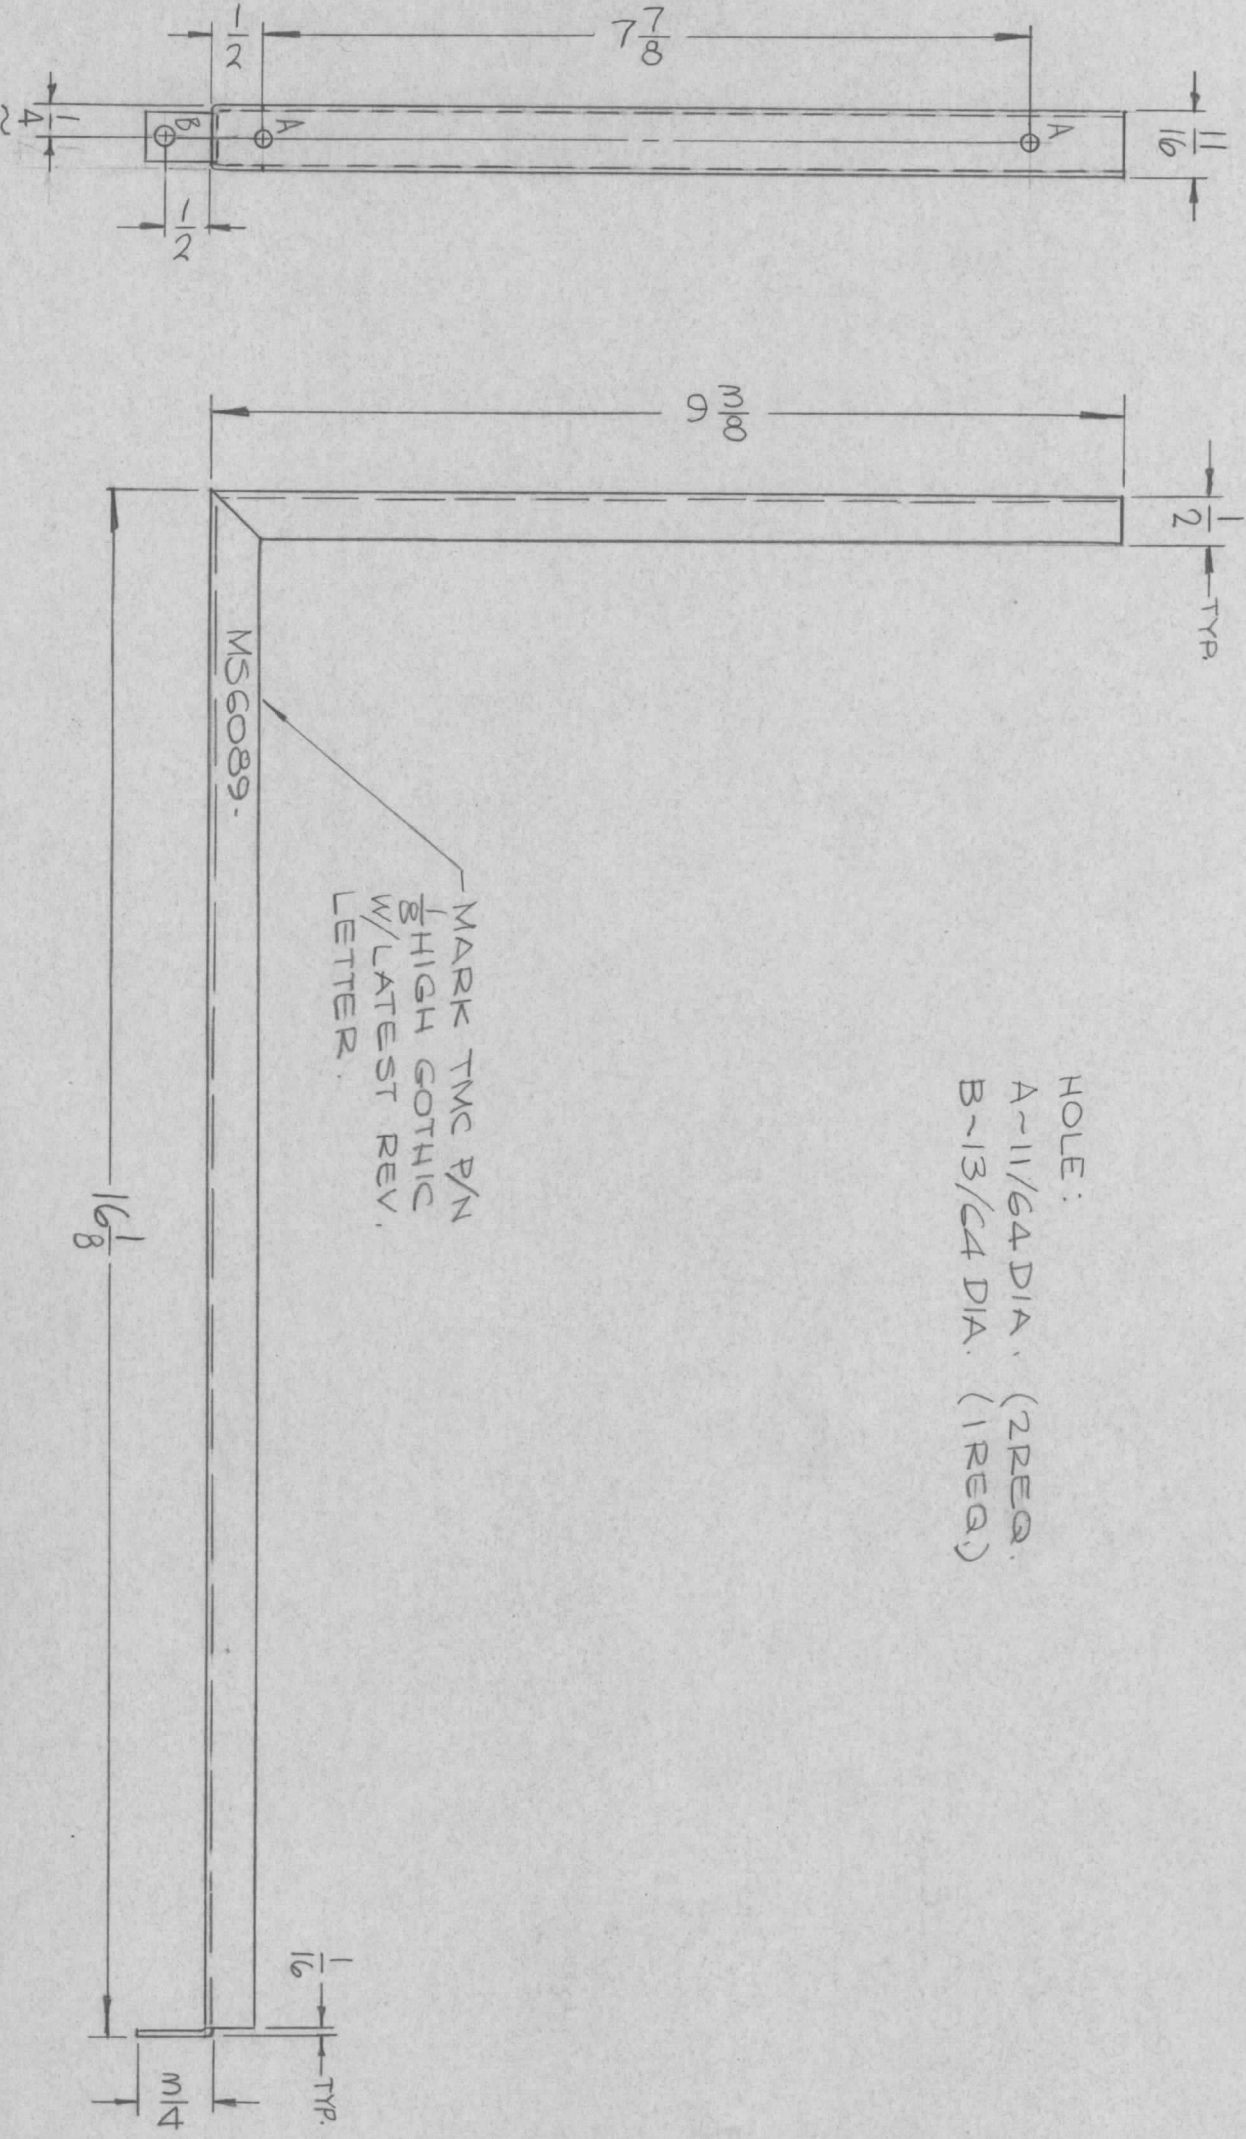

MARK TMC P/N
 1/8 HIGH GOTHIC
 W/LATEST REV.
 LETTER.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
 2. ALL ANGULAR BENDS 90 DEGREES
 3. REMOVE ALL BURRS AND SHARP EDGES

| | | | |
|---------------|-------------|-----------|-------|
| QTY / UNIT | 1 | GPT-10KSA | AX659 |
| MODEL USED ON | APPLICATION | | |
| ASS'Y NO. | CODE A | | |

| | | |
|---|-------------------|-----------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | DECIMALS | FRACTIONS |
| X ± .05 | 1/64 | |
| .XX ± .01 | TOLS. | ANGLES |
| .XXX ± .005 | | 0° - 30° |
| MATERIAL | ALUMINUM 5052-H32 | |
| FINISH | S404 YEL. IRIDITE | |

| REQ'D ITEM | PART NUMBER | DESCRIPTION | SYM. |
|--|-------------|-------------|------|
| LIST OF MATERIAL | | | |
| THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | | | |

| | | | |
|----------------|-----------------|---------|-------|
| FINAL APPROVAL | DATE | 3/1/67 | |
| MECH. DES. | DATE | 2/13/67 | |
| ELECT. DES. | DATE | | |
| CHECKED | DATE | | |
| DRAWN | DATE | | |
| SIZE | CODE IDENT. NO. | DWG NO. | ISSUE |
| B | 82679 | M56089 | Ø |
| SCALE | 1:2 | SHEET | OF |