


REVISIONS						
E.M.N.O.	DRAFT	CHKD	ZONE	LTR	DATE	
	W				2/09/72	
DESCRIPTION					DATE	APPROVED
ORIGINAL RELEASE FOR PRODUCTION						

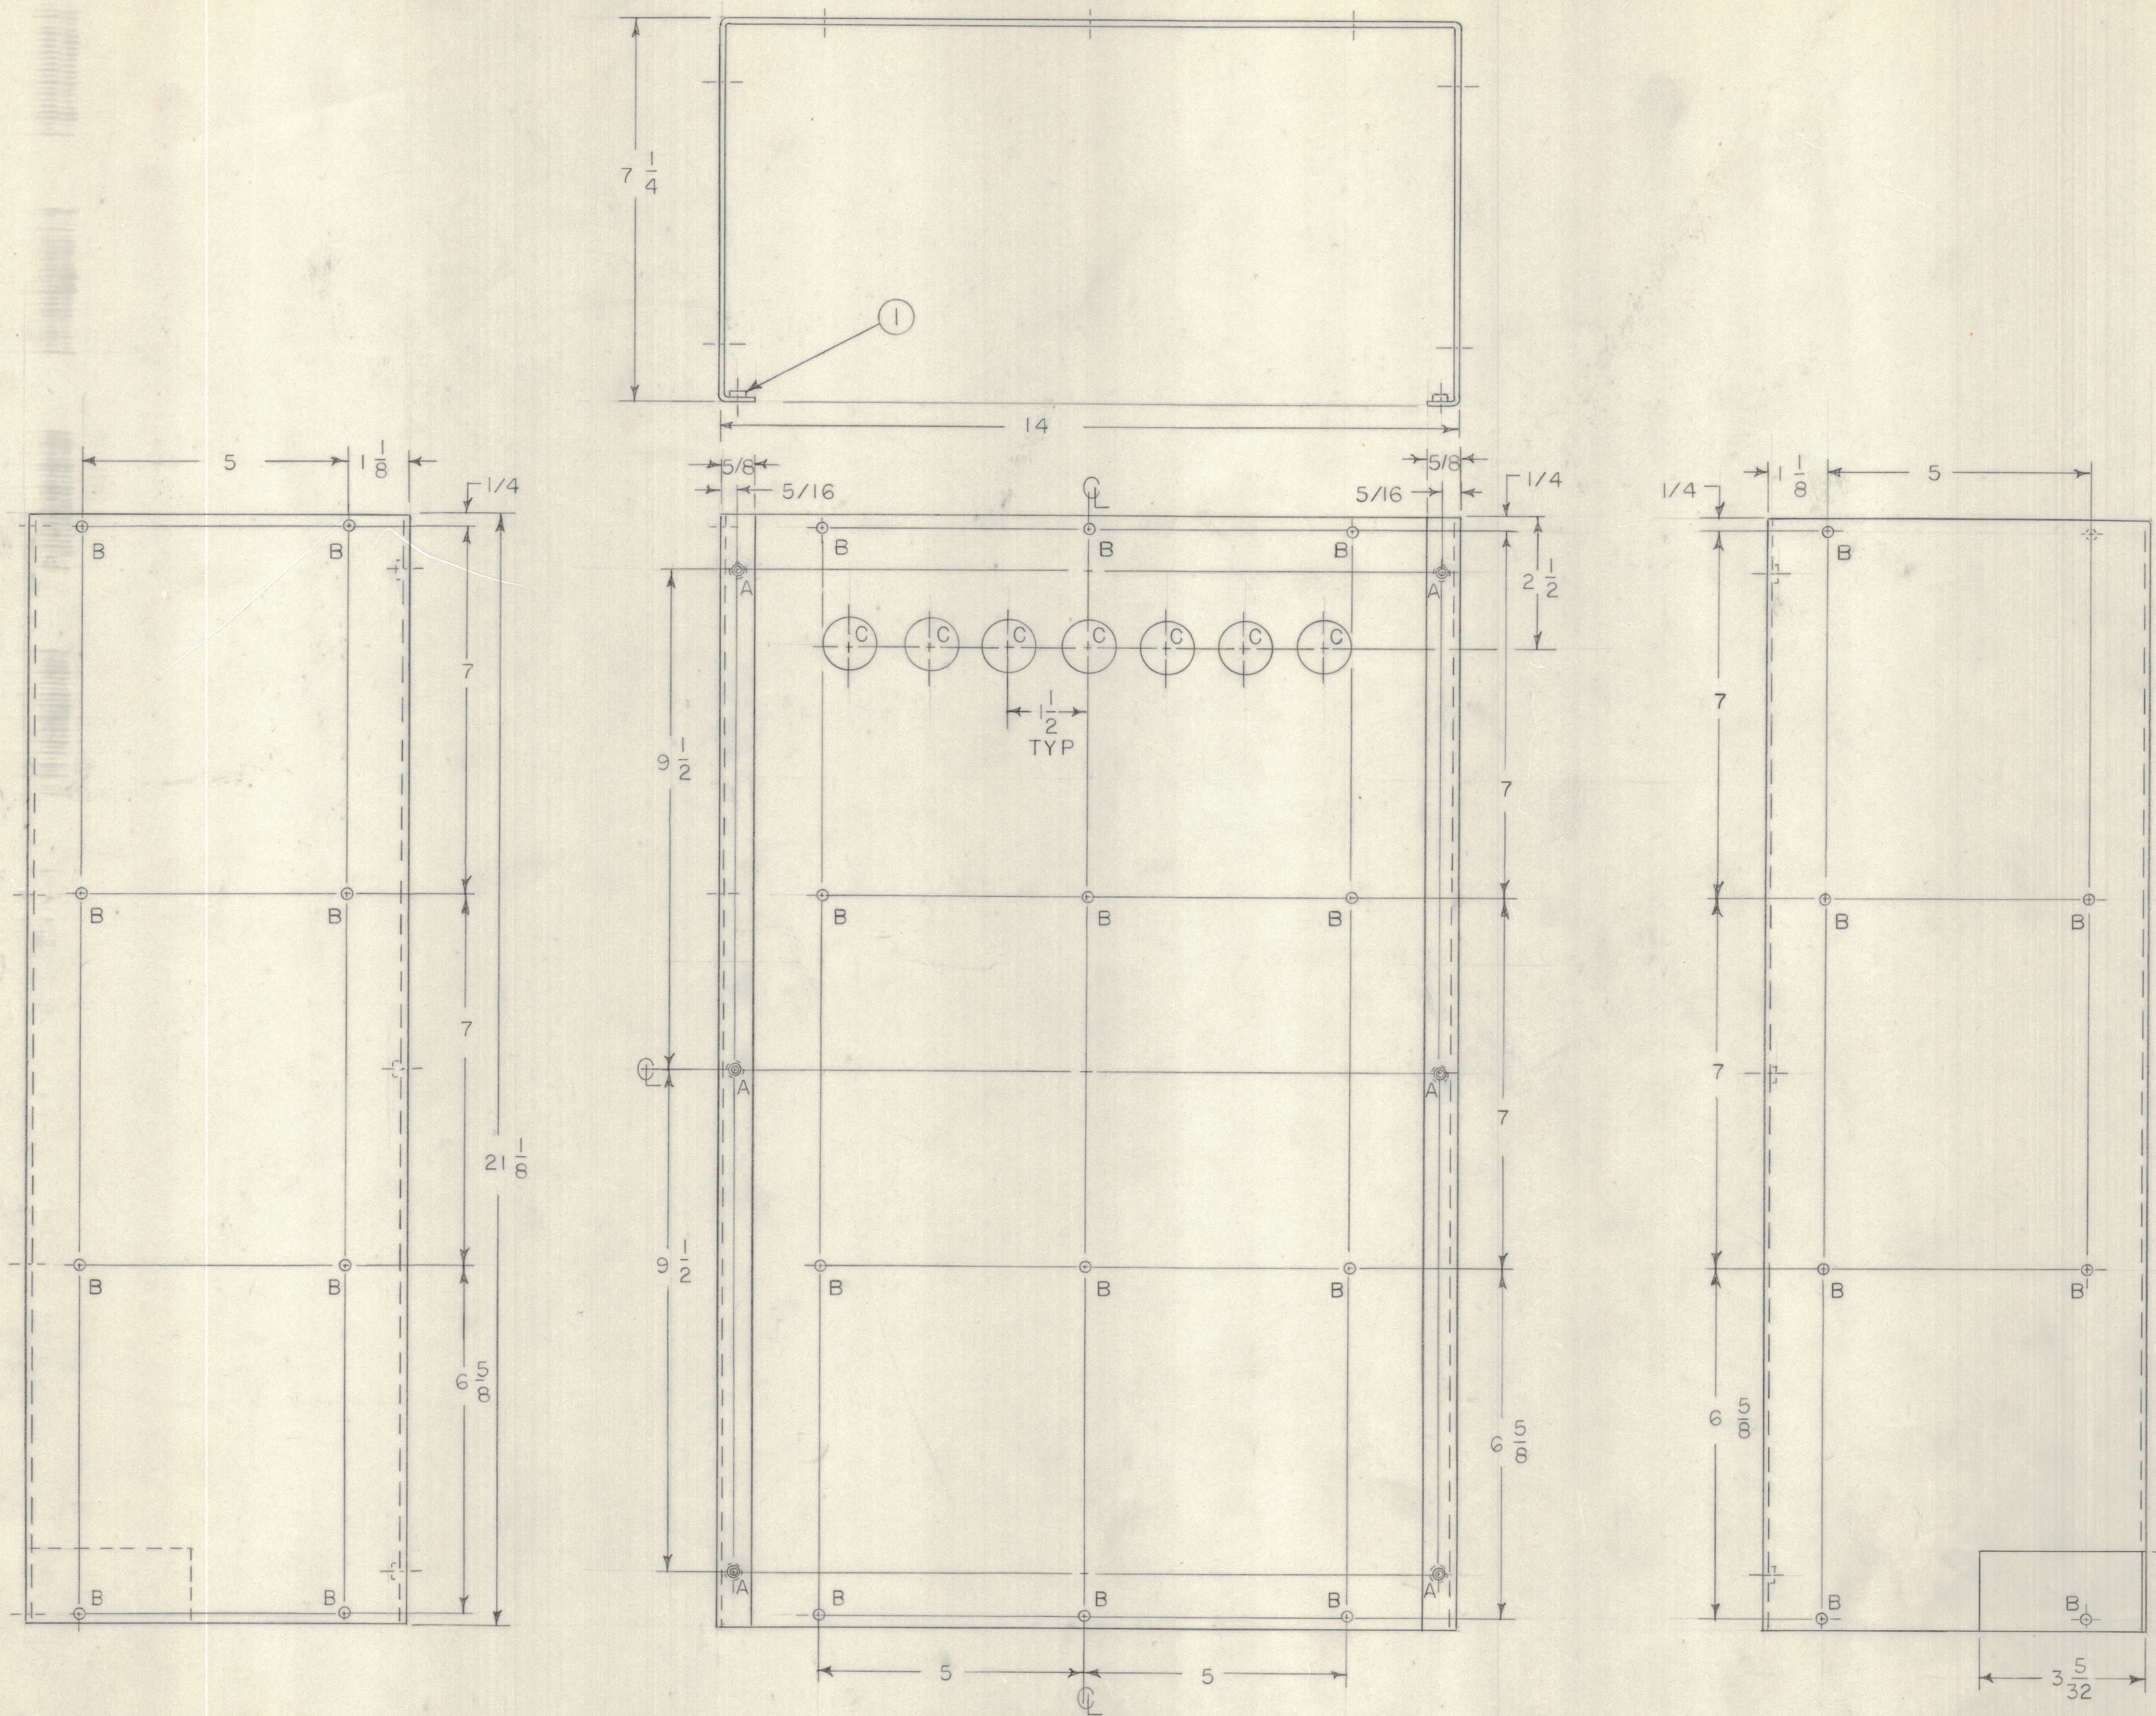

HOLE	DESCRIPTION	REQD
A	.191-.194 DIA	6
B	3/16 DIA	26
C	1" DIA	7

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

1	MFTR-10KE-5	BMA 483
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON
 DECIMALS .X ± .05
 FRACTIONS ± 1/64
 ANGLES ± 0° -30'

MATERIAL .063 THK.
 ALUM 5052 H32
 FINISH

6	1	NT129 632 3	NUT ROUND SWAGE TYPE	A
QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
	FB		LIST OF MATERIAL	
FINAL APPROVAL		DATE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK <i>CHASSIS, FILTER</i>	
MECH. DES.		DATE		
ELECT. DES.		DATE		
CHECKED		DATE		
DRAWN		DATE	SIZE CODE IDENT NO. DWG NO. ISSUE D 82679 MS 6287	
SCALE 1/2			SHEET 1 OF 1	

B MS 6287

A