| REVISIONS | | | | | | |
|---|---|---|---|---|---|---|
| E.M.N.NO | DRAFT | CHKD | ZONE | LTR | DESCRIPTION | DATE | APPROVED |
| | | | | Ø | ORIGINAL RELEASE FOR PRODUCTION | 1/7/72 | |

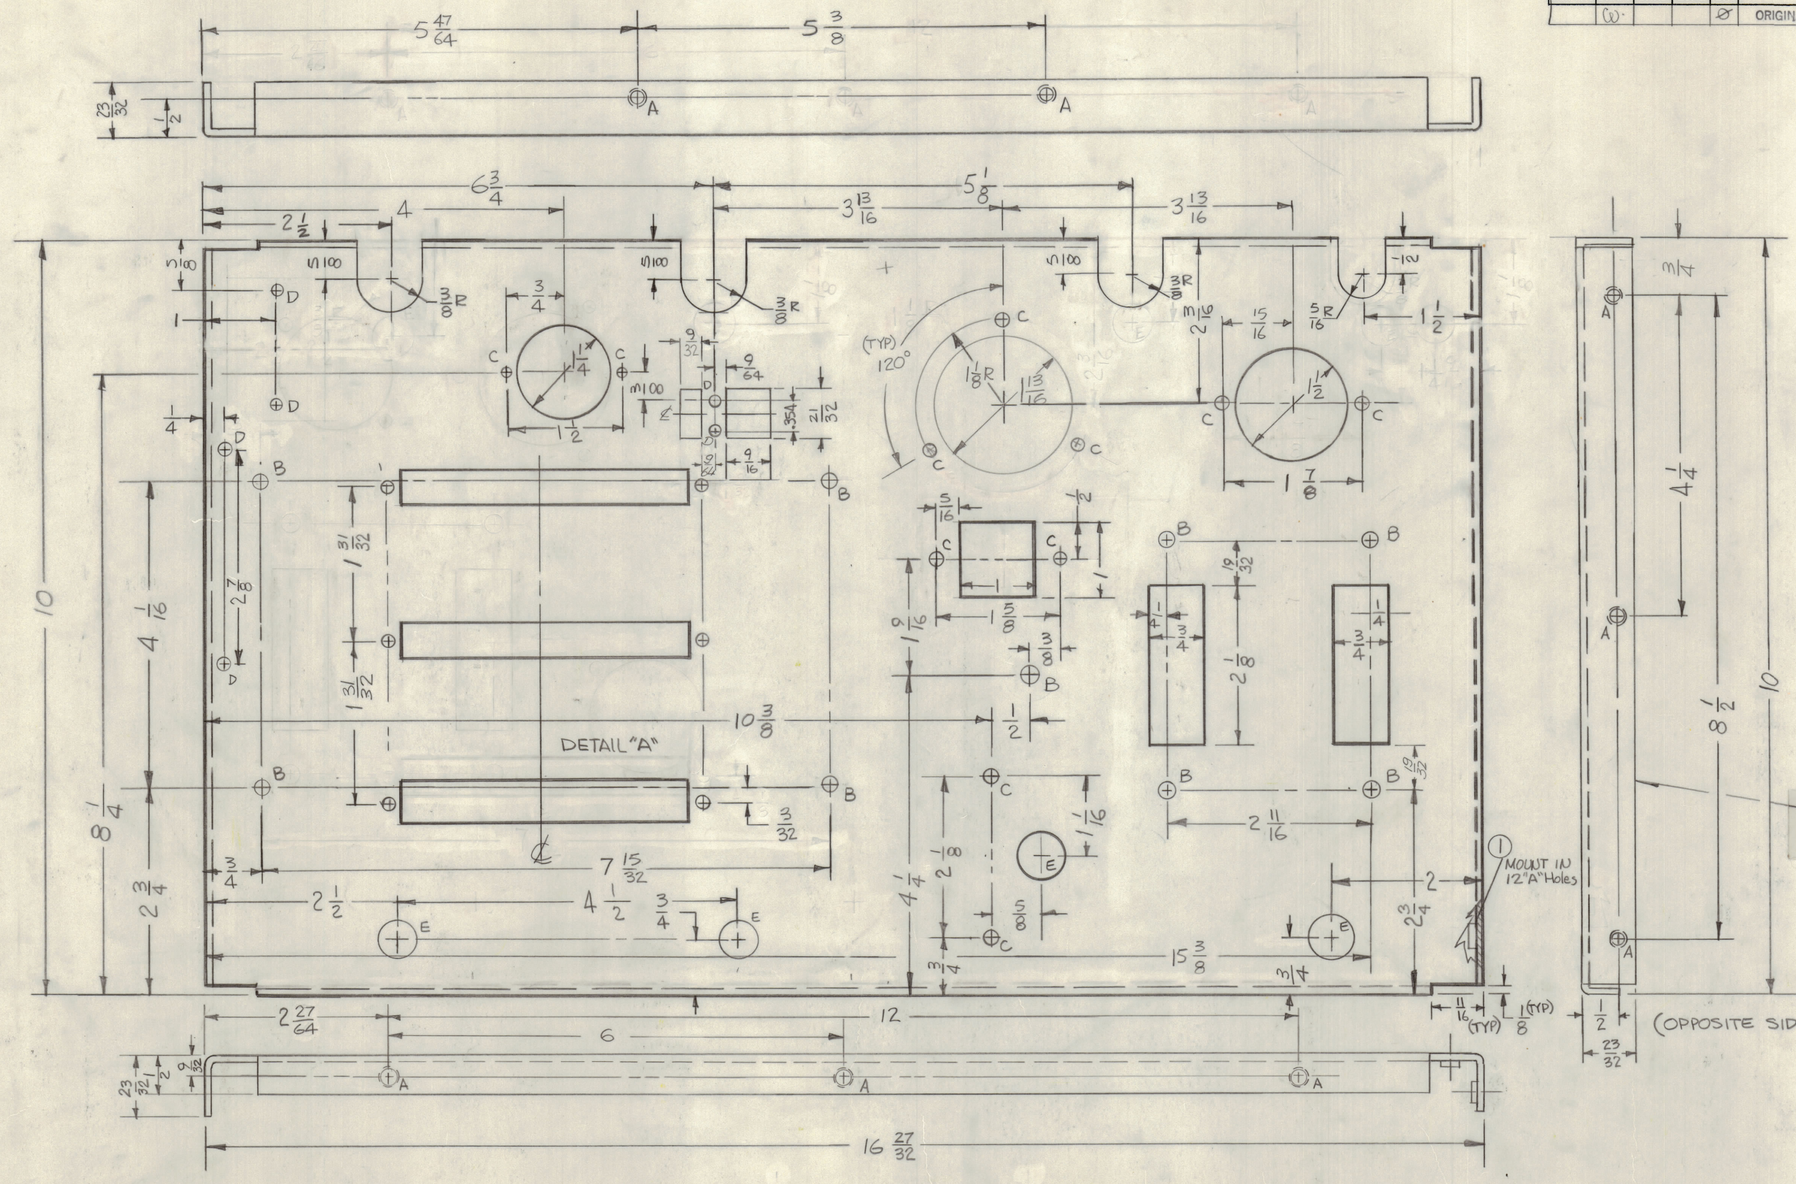


| Hole | Diameter | Req. |
|---|---|---|
| A | .221-224 DIA | 11 |
| B | 15/64 DIA | 9 |
| C | 13/64 DIA | 11 |
| D | 9/64 DIA | 6 |
| E | 5/8 DIA | 4 |

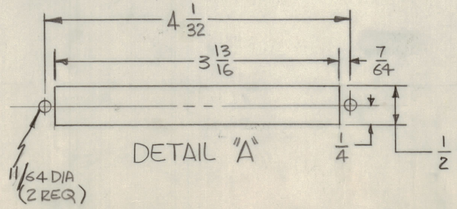


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

| QTY / UNIT | MODEL USED ON | ASS'Y NO. |
|---|---|---|
| 1 | RDCR-1YA | AX5162 |

APPLICATION

CODE

NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

LD2511

| QTY. REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| 11 | 1 | NT-129-832-4 | NUT, SWAGE | A |

LIST OF MATERIAL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON

| DECIMALS | FRACTIONS |
|---|---|
| X ± .05 | ± 1/64 |
| .XX ± .01 | ANGLES |
| .XXX ± .005 | ± 0° -30' |

MATERIAL .081 THK ALUM 5052 H32

FINISH 5404 YEL IRIDITE

| | | |
|---|---|---|
| FINAL APPROVAL | Ed Marco | DATE 1-6-72 |
| MECH. DES. | R Usso | DATE 12-15-71 |
| ELECT. DES. | | DATE |
| CHECKED | | DATE 12-15-71 |
| DRAWN | R Usso | DATE 12-15-71 |

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

# CHASSIS, MAIN

| SIZE | CODE IDENT NO. | DWG NO. | ISSUE |
|---|---|---|---|
| D | 82679 | MS6335 | Ø |

SCALE | SHEET OF

BRUNING 40-22