REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS 6795	Ø
1	ATSA-3	AX 5175			

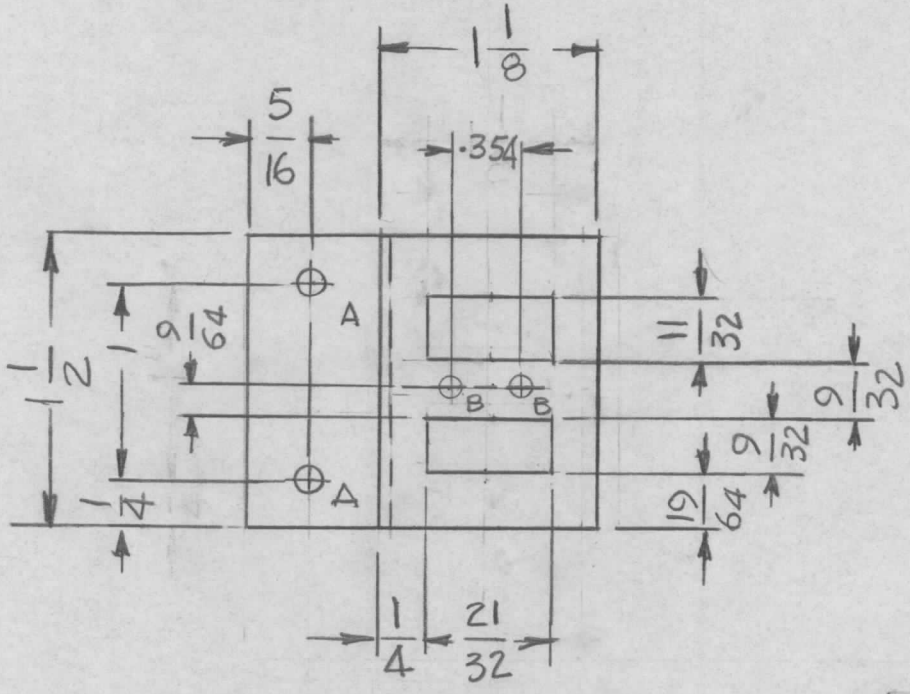

HOLE

A - 11/64 DIA 2 REQ.
B - 7/64 DIA 2 REQ

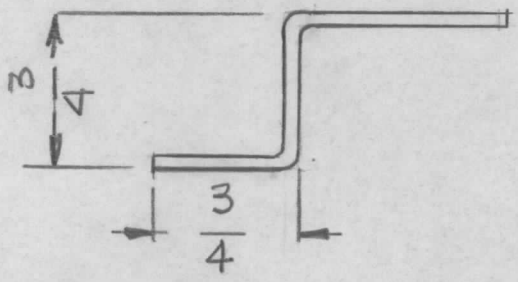

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
		ORIG. REL. FOR PROD.	4/29/77	—	GDL	WB	*

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

TMC INDUSTRIAL CORP.
MAMARONECK. NEW YORK

BRACKET MTG. RELAY

STOCK SIZE			
.064 THK			
ALY 5052-H32			
MATERIAL			
S404		G.D.L	*
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
YEL IRIDITE				MS6795 Ø
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: 1:1

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

FORM-108-A