


REVISIONS				DATE	APPROVED
EMN. NO.	DRAFT	CHKD	ZONE	LTR	DESCRIPTION
	G.D.L.			X	D HOLE ADD.
	M.C.			Ø	ORIGINAL RELEASE FOR PRODUCTION
					10-6-78
					9-21-79
					FB

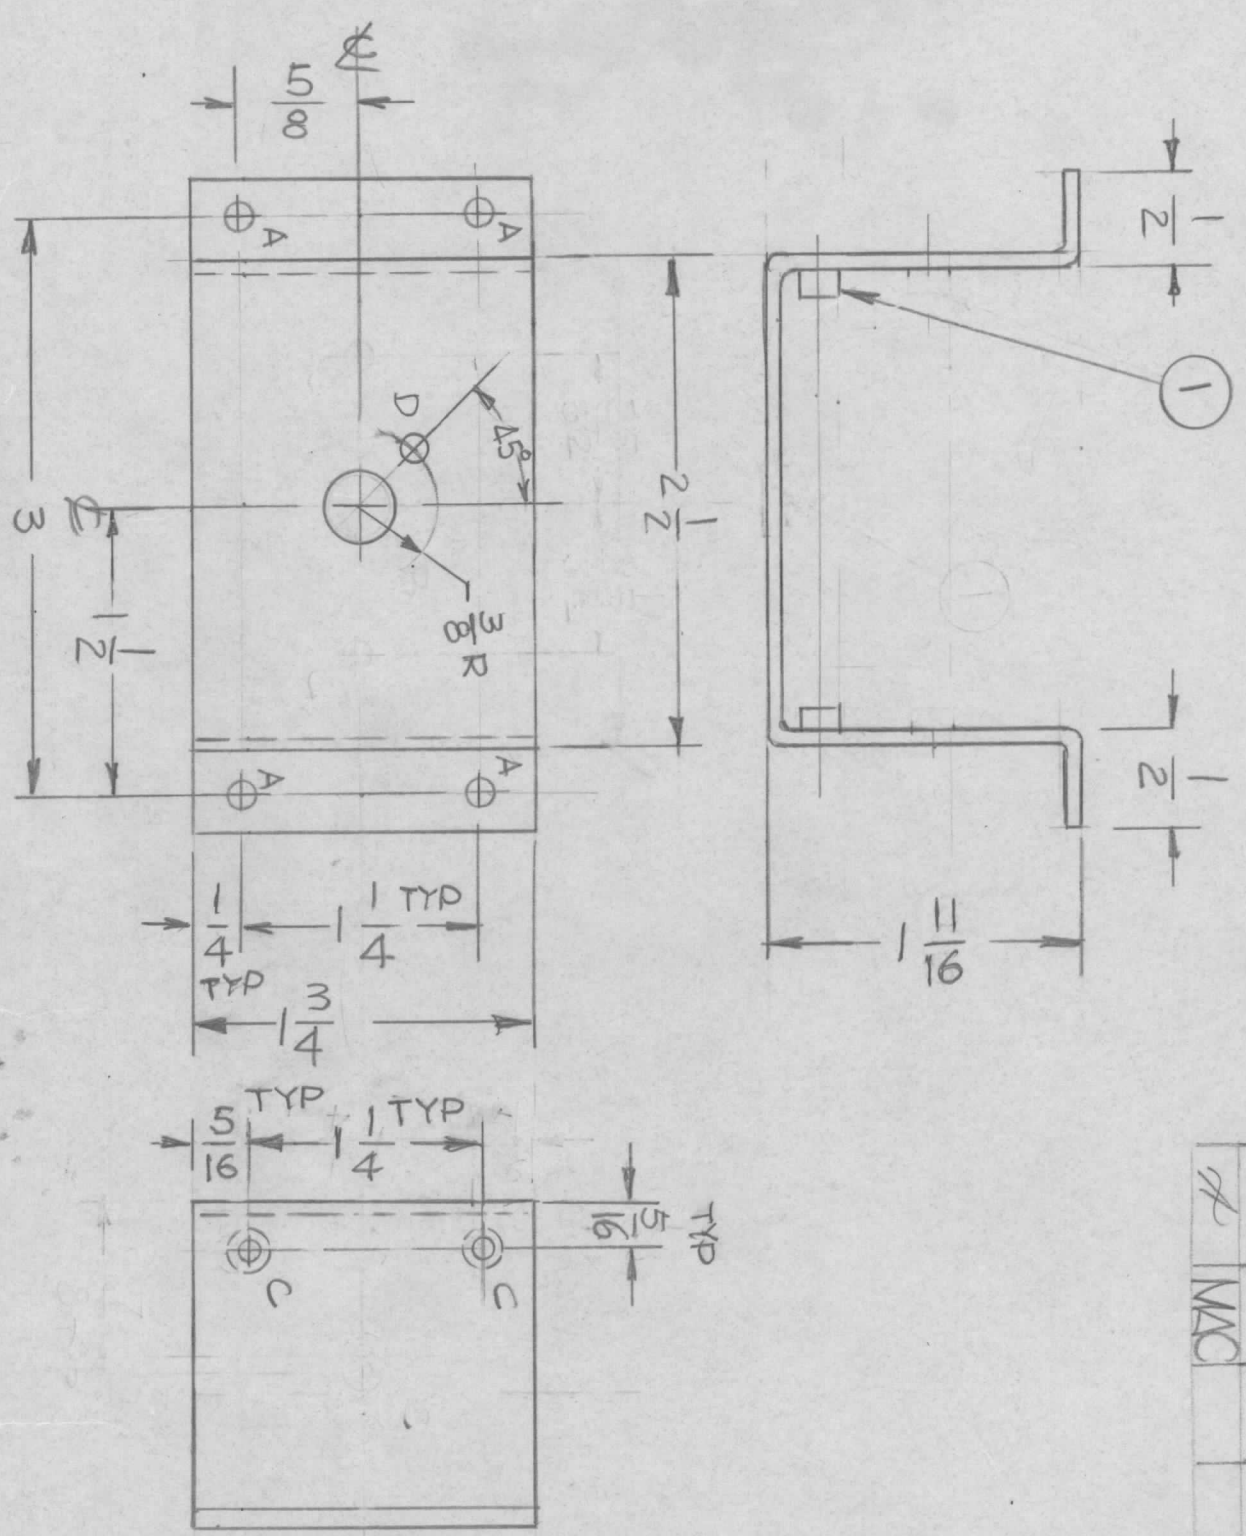

HOLES  
 A - 11/64 DIA 4 REQ'D  
 B - 3/8 DIA 1 REQ'D  
 C - .161 - .164 DIA 4 REQ'D  
 D - 9/64 DIA 1 REQ'D

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
2	1	NT129.0440-4 NUT, ROUND.	

LIST OF MATERIAL  
 THE TECHNICAL MATERIEL CORP.  
 MAMARONECK, NEW YORK

BRACKET, MTG. WAFER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DECIMALS		FRACTIONS		ELECT. DES.		DATE	
X	± .05	TOLS.	1/64	CHECKED	DATE	MECH. DES.	DATE	FINAL APPROVAL	DATE
.XX	± .01	ANGLES	90° - 30'	DRAWN	DATE				
.XXX	± .005			G.D.L.	5-25-78				

QTY / UNIT	MODEL USED ON	ASSY. NO.
1	MFT-10K/3	AS166
APPLICATION		
CODE		

NOTICE TO PERSONS RECEIVING THIS DRAWING  
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

- UNLESS OTHERWISE SPECIFIED:
1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
  2. ALL ANGULAR BENDS 90 DEGREES.
  3. REMOVE ALL BURRS AND SHARP EDGES.
  4. MOUNT INSERTS AFTER FINISHING.