


UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

REQ. PER UNIT	USED ON		MS
	MODEL	ASS'Y. NO.	
1	CPC-11		6-26-78

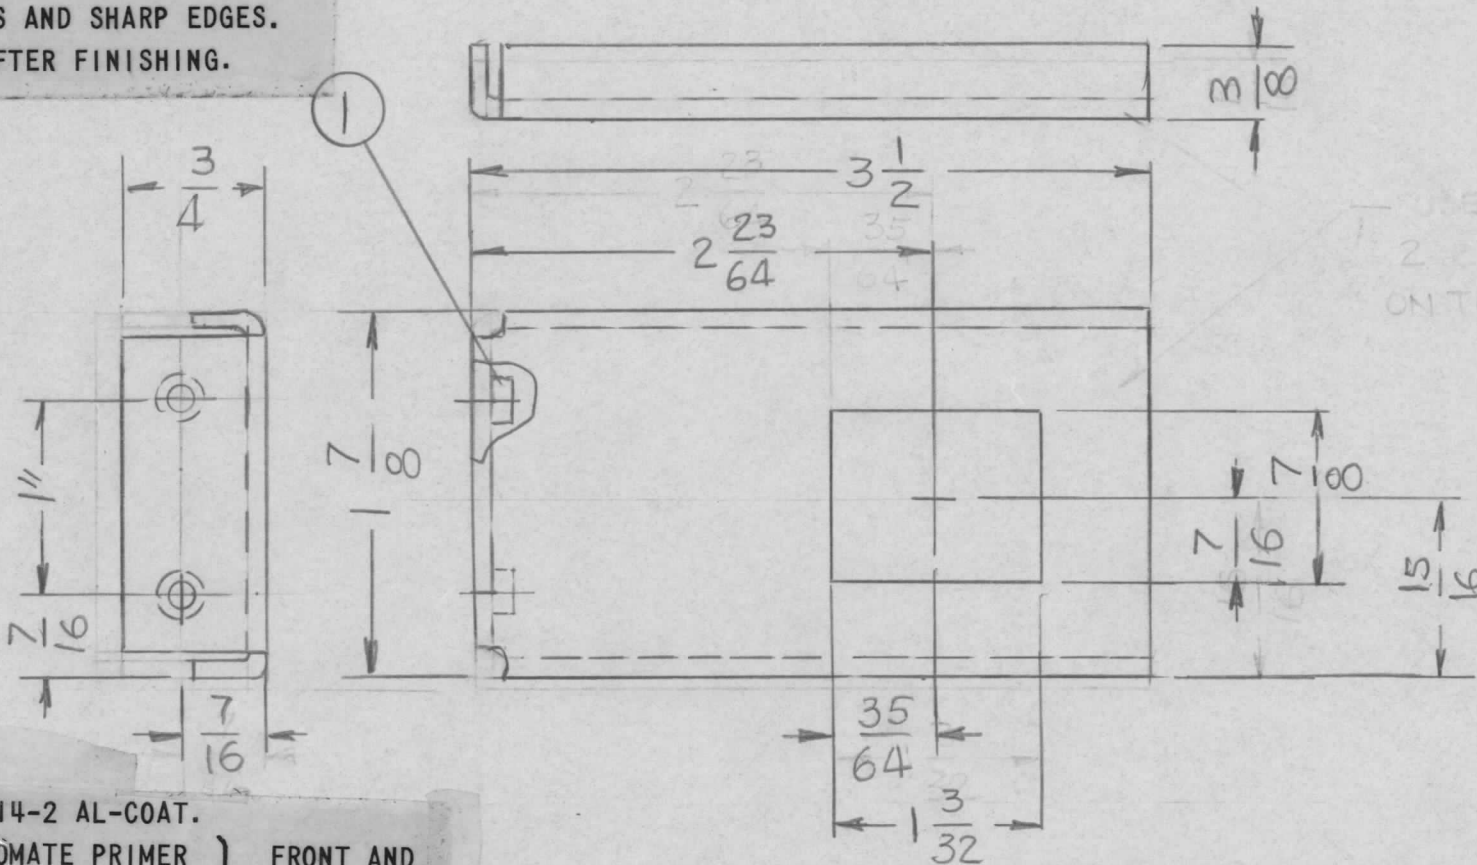

USE NOTES 2 & 3 ONLY ON THIS

FINISH NOTES:

1. S404 - IRIDITE 14-2 AL-COAT.
 2. S114 - ZINC CHROMATE PRIMER
 3. S115 - SMOOTH GRAY ENAMEL
- FRONT AND EDGES ONLY OR PRIME AND PAINT PER CUSTOMER'S SPECIFICATIONS

2	1	NT 129-0632-4	NUT, ROUND	
REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
STOCK SIZE			TMC INDUSTRIAL CORP. MAMARONECK, NEW YORK	
.081 THK ALUM.			BRACKET, MTG. SW.	
MATERIAL				
5052-H32		G.D.L.		
TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED
SEE NOTE				FINAL APPROVAL
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS6911 X

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE:				
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
FRAC. DIM. ±			REMOVE ALL BURRS AND SHARP EDGES				
ANGULAR DIM. ±							