


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
4	TER-3500	A-1223	12-1-55
4	TER-500	A-1223	8-21-56
4	TER-3500-70	A-1223	10-23-57
4	TER-500-70	A-1223	10-23-57
4	TER-3500-300	A-1223	2-8-61

MS-762 C

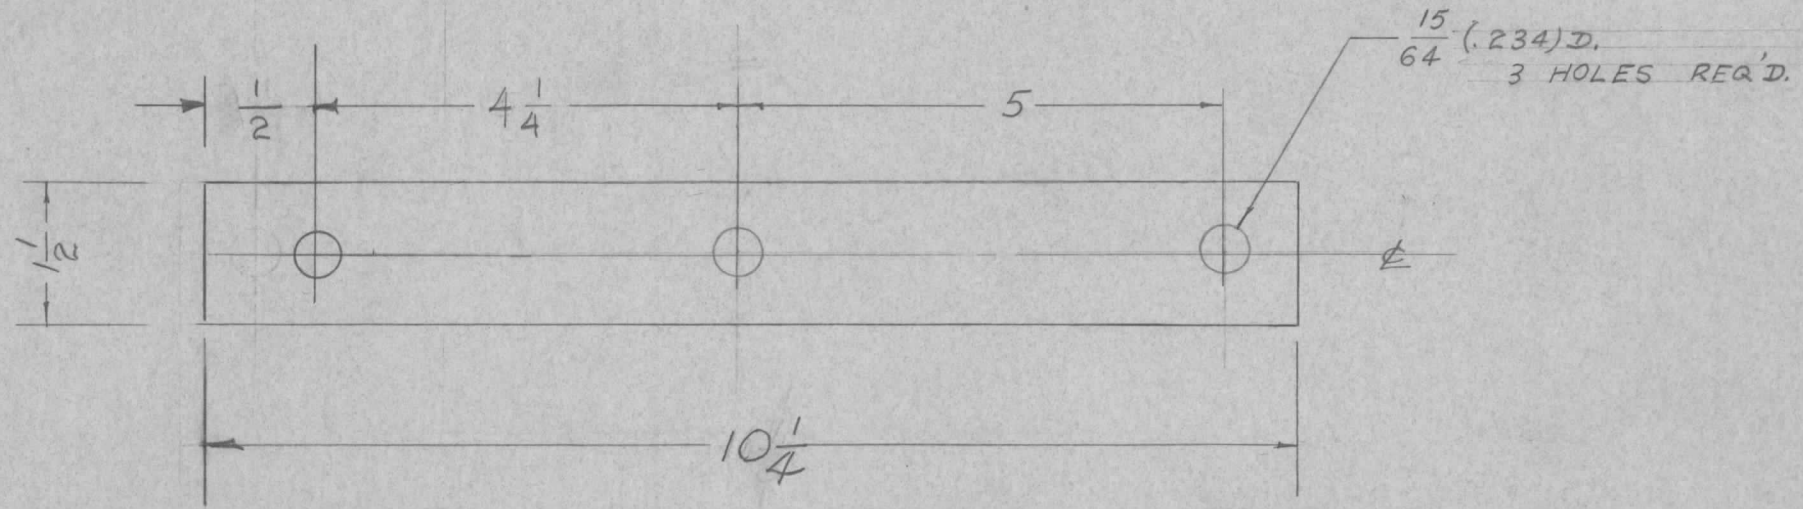

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL		
C	1	S404-IRIDITE WAS \$101-CAUSTIC DIP	12-7-59	1001	JP		EMN		.081	<b>THE TECHNICAL MATERIEL CORP.</b> MAMARONECK, NEW YORK <b>MOUNTING BRACKET STIFFENER</b> TER-	C		
B	2	10 1/4 WAS 11 1/8	8/21/56	2	JAR	OWD			STOCK SIZE				
B	1	1/2 WAS 1/8							ALUMINUM				
A	1	11 1/8 WAS 11 1/2	12/14/55	1	JAR	OWD	AMS		MATERIAL				
TOLERANCES			SCALE: 1-2					525-H32	—H—	PB 12-1-55	JAR	ARB	
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER		HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
FRAC. DIM. ± 1/64								S404 IRIDITE		ARB	WOC		
ANGULAR DIM. ±					FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	MS-762		C		