


REQ. PER UNIT	444	USED ON		MS-963	B
	MODEL	ASS'Y. NO.	DATE		
1	RTF		8-20-56		

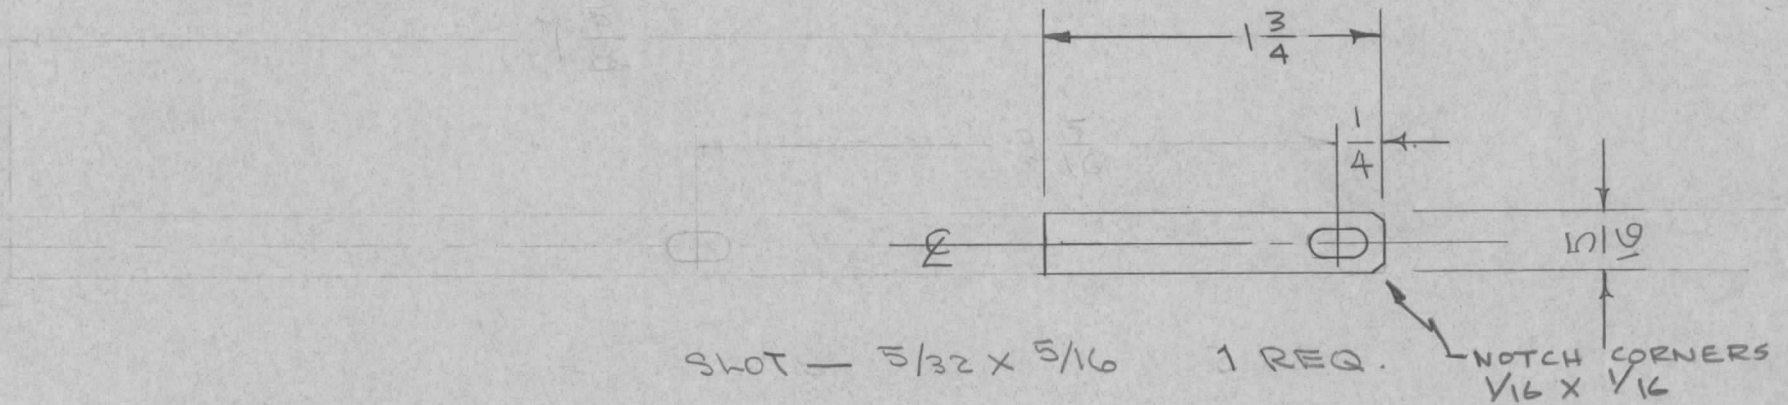

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL					
B	3	CORNERS NOTCHED	$\frac{12}{13/56}$	2	16	JHE	AK		.019 THICK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK						
	2	$\frac{13}{4}$ WAS $\frac{7}{8}$							STOCK SIZE							
	1	SLOT WAS 2 REQ.							COPPER		CONNECTOR, SW-166					
A	1	$\frac{7}{8}$ WAS $\frac{7}{16}$	$\frac{10}{1/56}$	1	050	JHE	AK		MATERIAL	TO CHIT SEC A.	P/A RTF.					
TOLERANCES			SCALE:					COMMERCIAL SOFT	0008/20/56	JHE	WDC					
DEC. DIM. \pm			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL				
FRAC. DIM. $\pm \frac{1}{64}$								S-245 SILVER PLATE			AM				MS-963	B
ANGULAR DIM. \pm								FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.					