


| | | | | | |
|---------------|---------|------------|---------|--------|---|
| REQ. PER UNIT | USED ON | | | MS-968 | A |
| | MODEL | ASS'Y. NO. | DATE | | |
| 1 | RTF | | 8-23-46 | | |

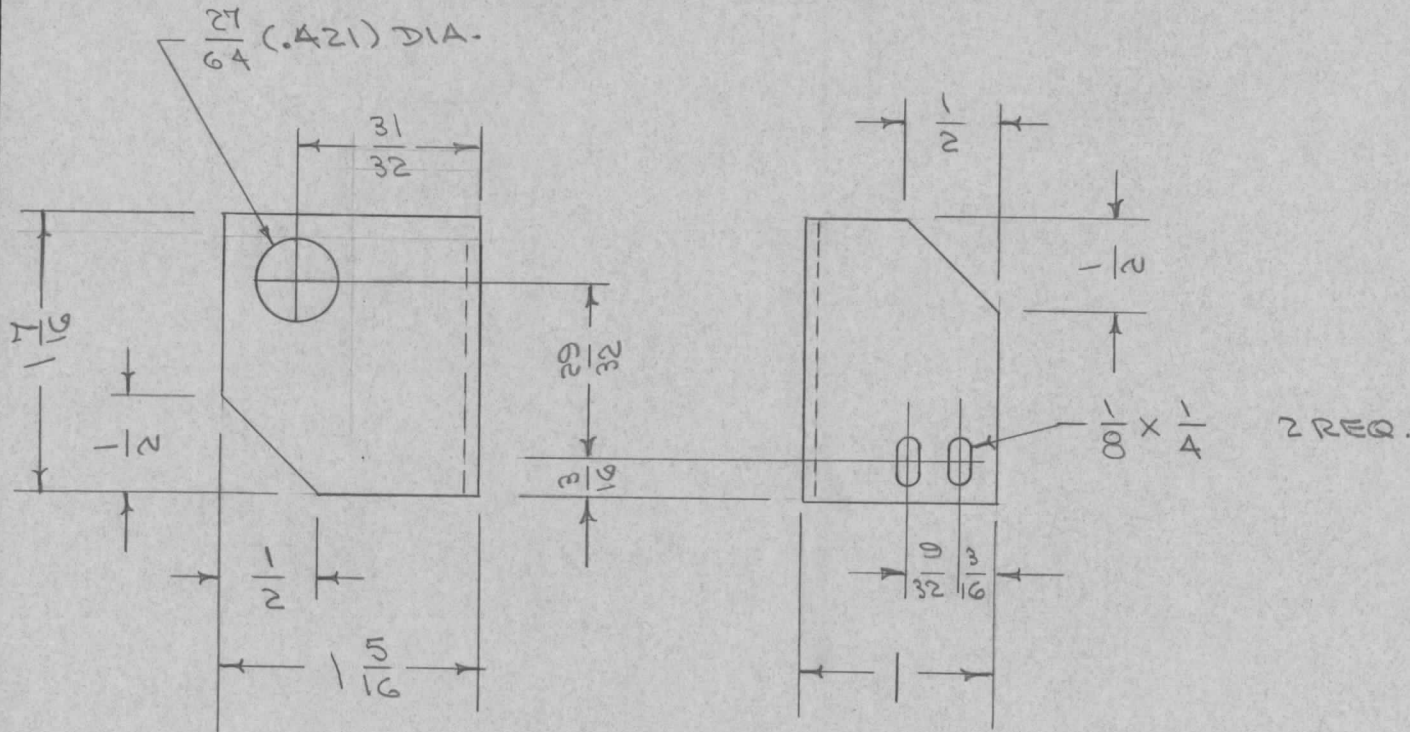

| ISSUE | ITEM | CHANGED FROM | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. | REQ. ITEM | PART NO. | DESCRIPTION | SYMBOL | | | | |
|-------------------------------|------|--------------------------------------|---|---------|--------|---------|-----------|--------------------|-------------------|--|------------------------|----------------|--|--|----------|
| | | | | | | | | | .064 | THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK | BRACKET, S.S.B. SWITCH | | | | |
| | | | | | | | | | STOCK SIZE | | | | | | |
| | | | | | | | | | ALUMINUM | | | | | | |
| A | 1 | 5404-IRIDITE WAS 3101-CAUSTIC DIP | 12-8 59 | 1001 | P | | EMN | | | MULT. | RTF | | | | |
| TOLERANCES | | | SCALE: | | | | | 5052 H32 | | 8/23/46 | JAD | | | | |
| DEC. DIM. \pm | | | MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES | | | | | TYPE & TEMPER | HEAT TREAT. SPEC. | DRAWN | CHECKED | FINAL APPROVAL | | | |
| FRAC. DIM. $\pm \frac{1}{64}$ | | | | | | | | 5404 IRIDITE | | | | | | | |
| ANGULAR DIM. \pm | | | | | | | | FINISH & SPEC. NO. | ELEC. DES. APP. | MECH. DES. APP. | | | | | MS-968 A |