


REQ. PER UNIT	USED ON		MS-978 D
	MODEL	ASS'Y. NO.	
	RTF		9/6/56
	CAB/FR		

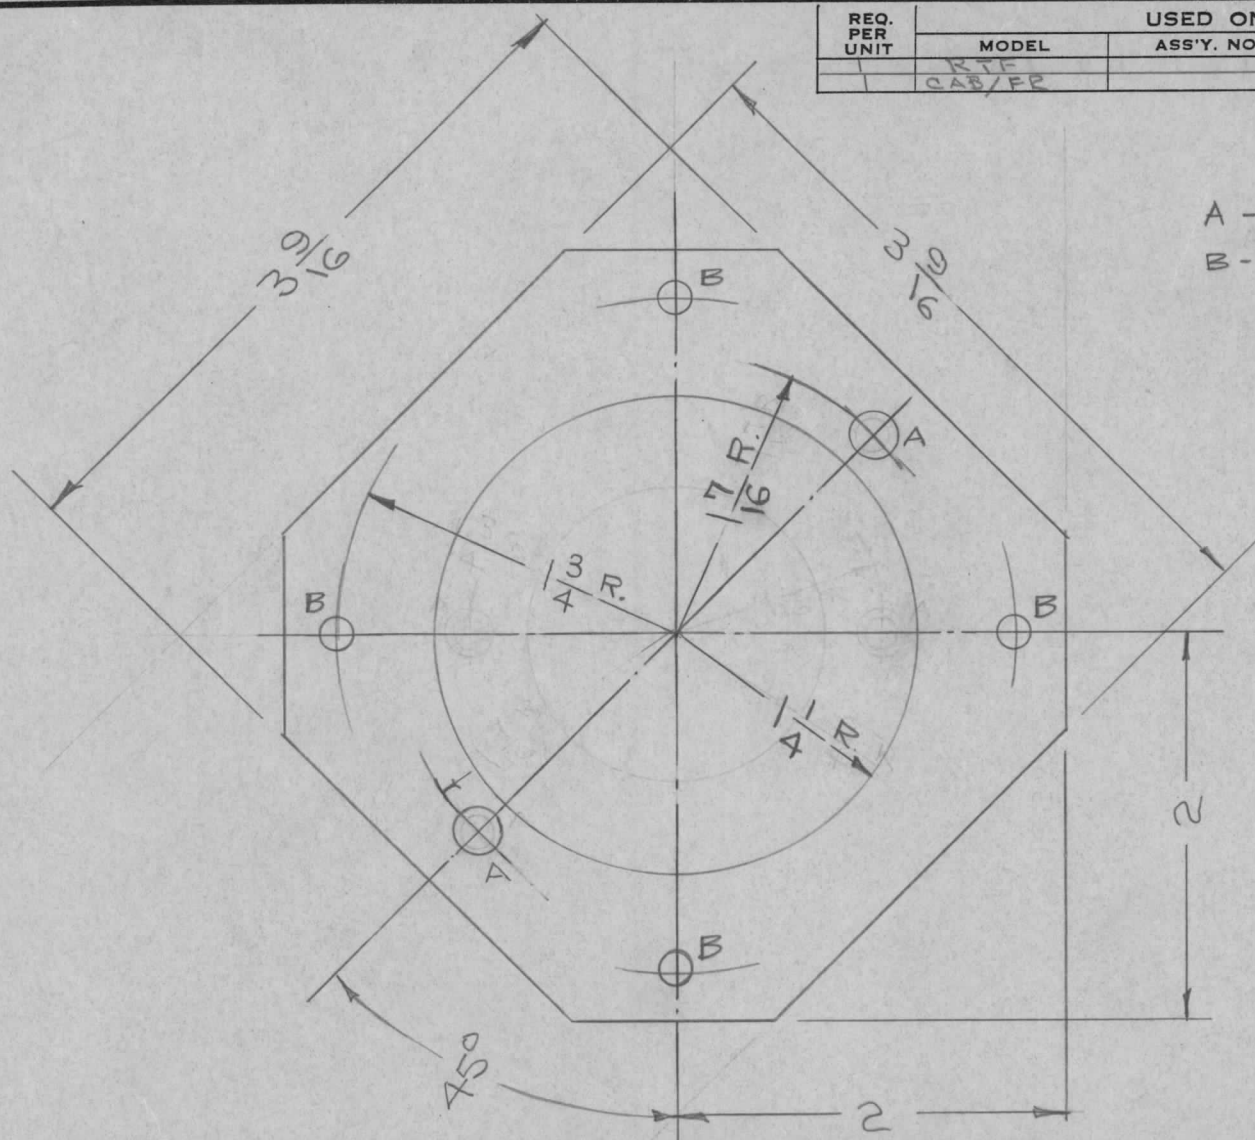

A - 1/4 (.250) D. 2 REQ.
 B - 13/64 (.203) D. 4 REQ.

D	1	S-404 IRIDITE WAS S-101 CAUSTIC DIP	12-8 59	1001	Φ		EMN	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL				
C	1	1 1/4 R. WAS 3/4 R. TWO "A" HOLE DELE	11/1/57	3	16	JADe	EMN		.064	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK					
B	1	FOUR "A" HOLES WERE "B" HOLES	1/5/57	2	16	JADe	EMN		STOCK SIZE						
A	1	13/64 D 2 Holes Added	10/29/56	1		JADe	EMN		ALUMINUM	PLATE, MOTOR MOUNT					
									MATERIAL	P/A & CAB/FR	GPT-750				
ISSUE ITEM CHANGED FROM			DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	5052-H32		JADe 9/6/56	JADe	WDC			
TOLERANCES			SCALE:					TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL			
DEC. DIM. ±			MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES					5404 IRIDITE							
FRAC. DIM. ± 1/64															
ANGULAR DIM. ±															
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	MS-978 D				