


REQ. PER UNIT	G10		USED ON
	MODEL	ASS'Y. NO.	DATE
1	RTF		9-13-56
1	RTF-2	P/A	11/20/58

MS-984 B

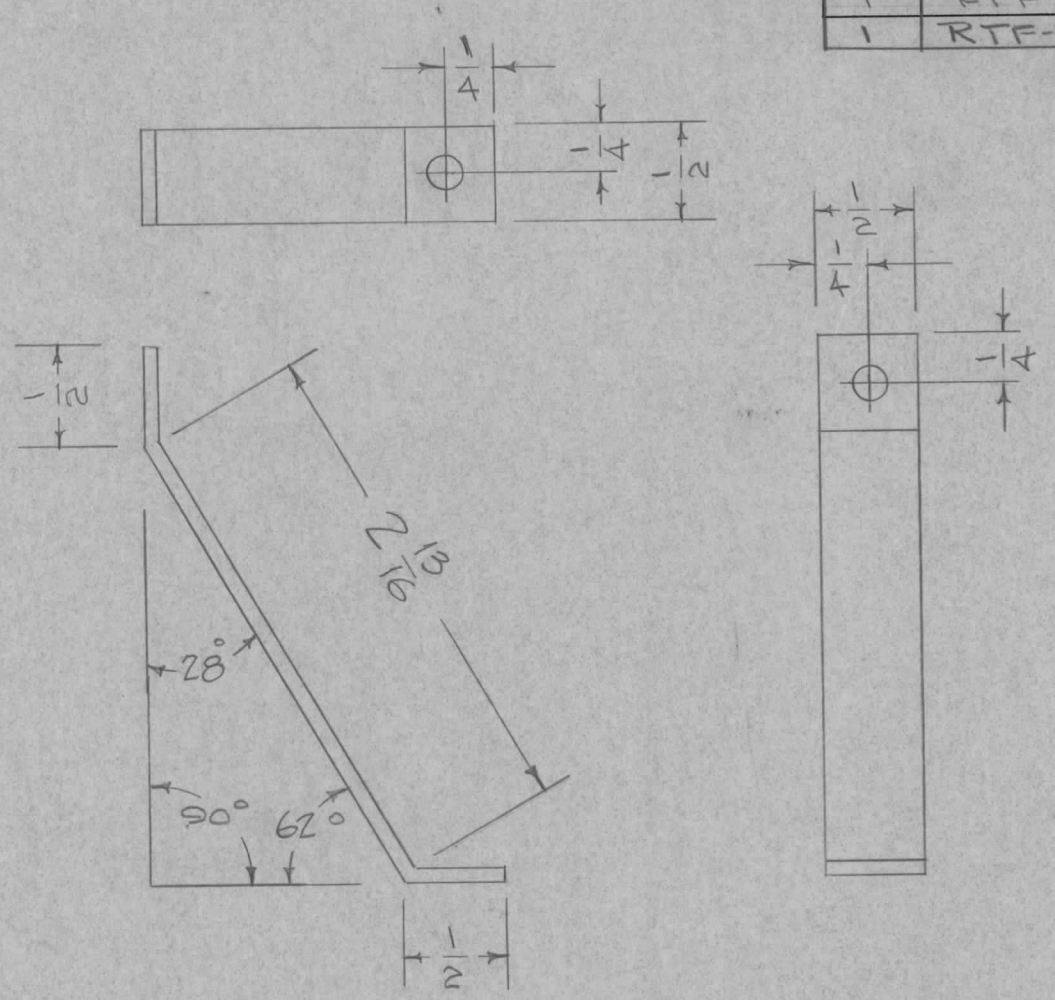

HOLES 1/64(.125) D. 2 REQ.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
B	3	28° WAS 30°	3-7-61	4347	RU	gcb	<i>[Signature]</i>	.064		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	SWITCH BRACKET, REAR P/A RTF
	2	62° WAS 60°						STOCK SIZE			
	1	2-13/16 DIM WAS 2-19/32						ALUMINUM			
A	1	5404 - IRIDITE WAS S101 - CAUSTIC DIP	12-8 59	1001	P		EMN	MATERIAL			
TOLERANCES								SCALE:		FINAL APPROVAL	
DEC. DIM. ± FRAC. DIM. ± 1/64 ANGULAR DIM. ± 2°								MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		5052 H32	
								TYPE & TEMPER		DRAWN	
								HEAT TREAT. SPEC.		CHECKED	
								FINISH & SPEC. NO.		MECH. DES. APP.	
								5404 - IRIDITE		ELEC. DES. APP.	
										MS-984 B	