REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	MS-997	C
1	MSR-1		1-2-57		
1	MSR-4		10-9-63		
1	MSR-5		10-9-63		

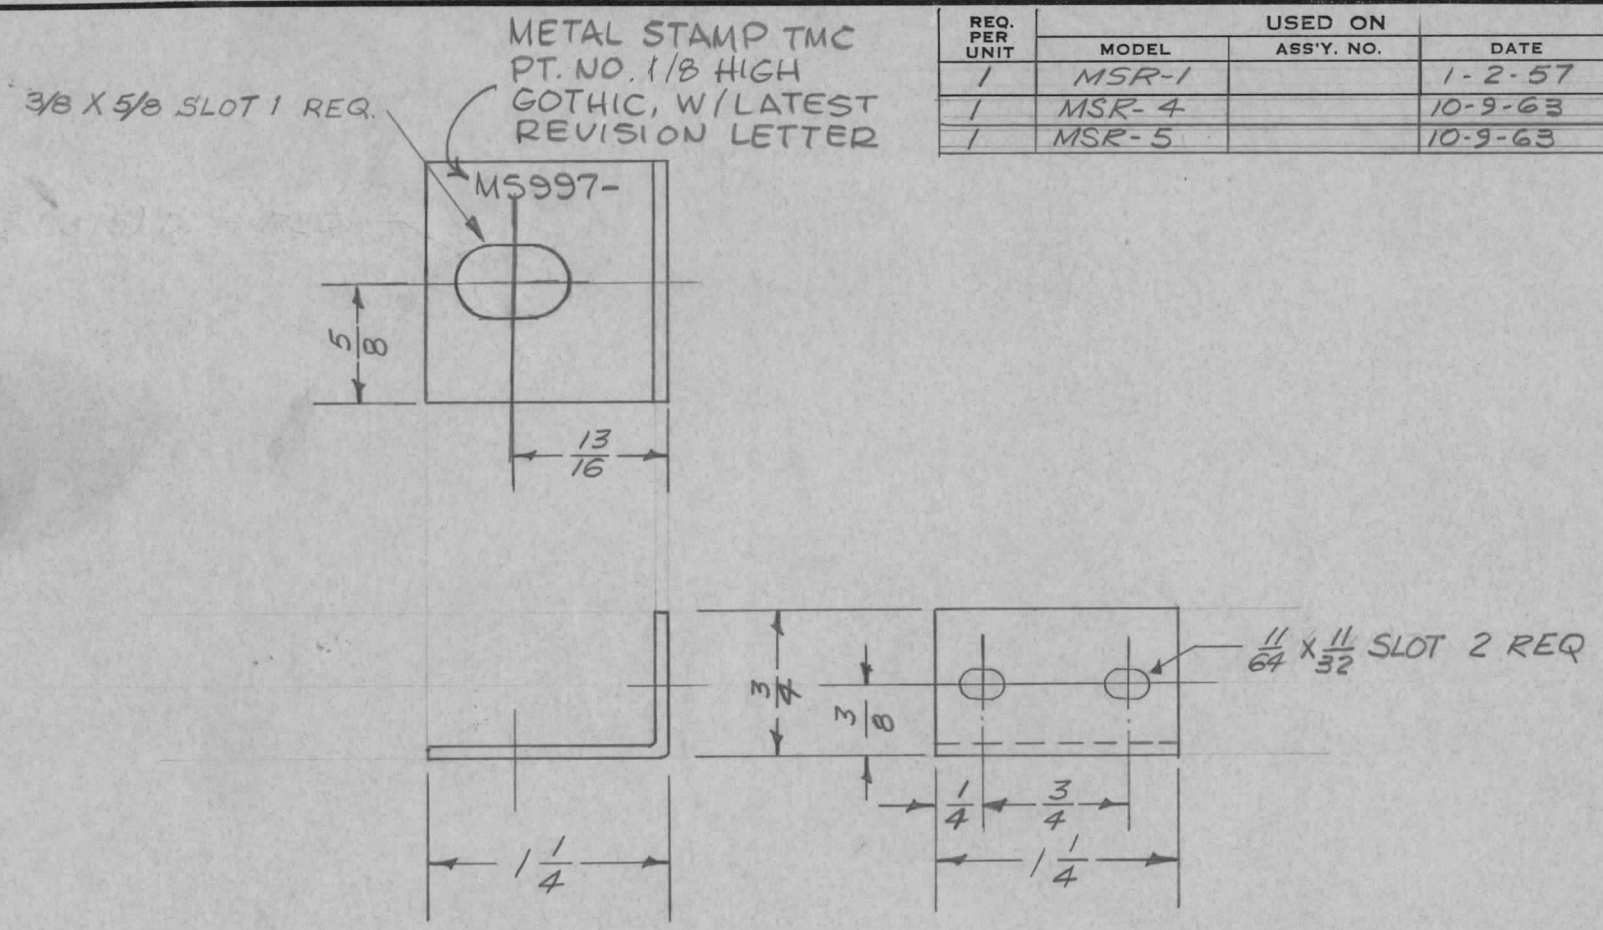

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS	TOLERANCES	FRACTIONS
.X ± .05		± 1/64
.XX ± .01		ANGLES
.XXX ± .005		± 0° 30′

CUT HERE GUARANTEED 2-66

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
C		METAL STAMP ADDED 3/8 X 5/8 SLOT WAS 3/8 HOLE	8/9/65	14587	H.V.V.		
B	1	USED ON MSR-4 & -5 ADDED SLOTS WERE 11/64 D HOLES	9/23/63	10033	DD		
A	1	S404 IRIDITE WAS S101 CAUSTIC DID	12-8 59	1001	P		EMN

TOLERANCES

DEC. DIM. ±
FRAC. DIM. ±
ANGULAR DIM. ±

SCALE: —//—

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.064 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE		
		ALUMINUM	BRACKET, CONDENSER MOUNTING	
		MATERIAL		
		5052-H32		
		TYPE & TEMPER	HEAT TREAT. SPEC.	
		S404 IRIDITE		
		FINISH & SPEC. NO.		

DRAWN	CHECKED	FINAL APPROVAL
1-2-57		
ELEC. DES. APP.	MECH. DES. APP.	MS-997 C