


REVISIONS					DATE	APPROVED
E.M.N. NO.	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	
	GDL			Ø		

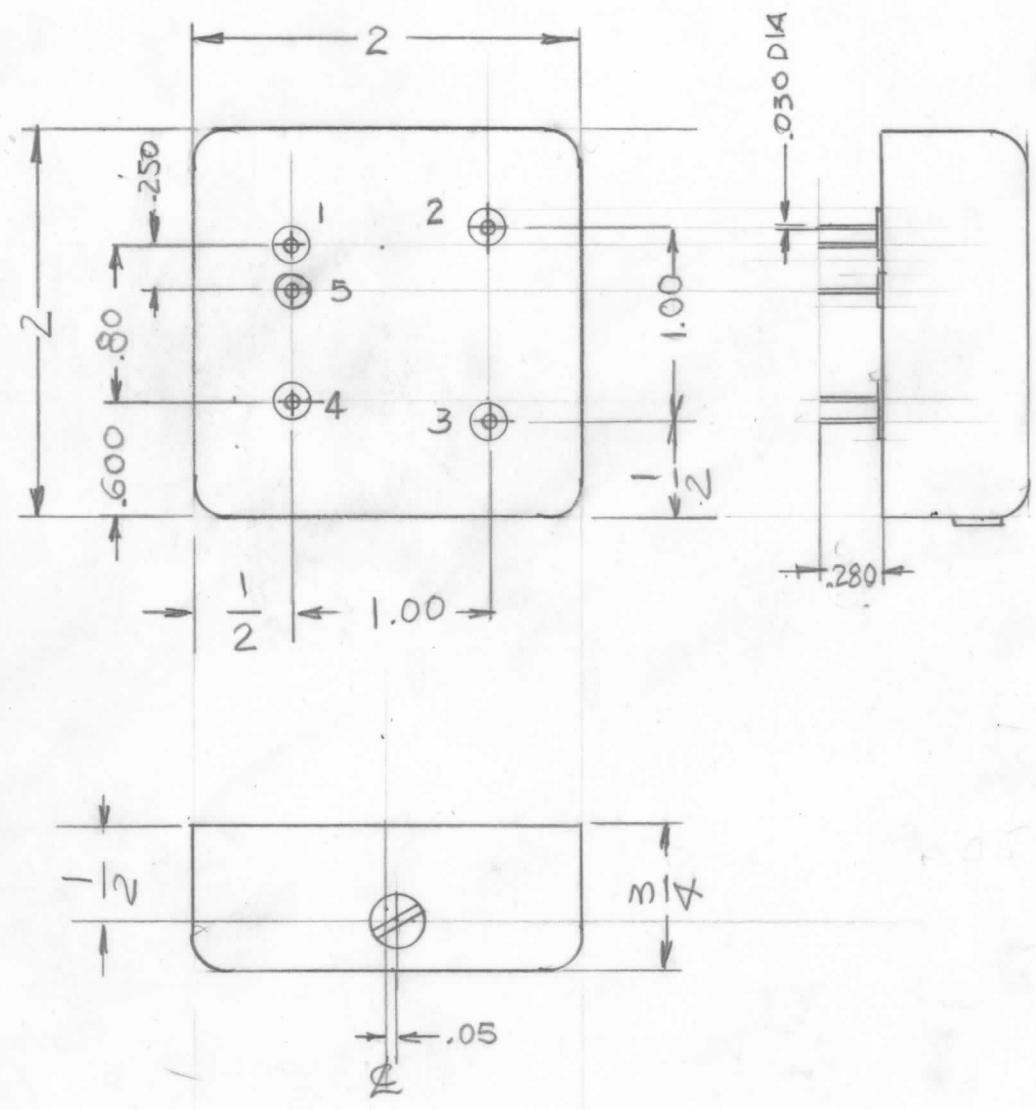

1 OUTPUT (50Ω)
 2 +12V
 3 GND
 4 GND
 5 GND

ELECTRICAL SPECIFICATIONS:
 CO-252D57 SERIES : $\pm 5 \times 10^{-7}$
 TEMP. RANGE -20°C TO 70°C
 OUTPUT 1VRMS ACROSS 50Ω
 SINE WAVE OUTPUT 1MHZ
 SUPPLY VOLTAGE 5 12 VDC
 ELECTRONIC TUNING TC/VC X 0
 AGING RATE 5×10^{-7} TO 1×10^{-6} PER YEAR

PIN NO.	LEGEND
1	OUTPUT (50Ω)
2	+ 12V DC
3	GND
4	GND
5	GND

1	MMX-4A	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
3401-453	CODE	
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYM.
LIST OF MATERIAL				
FINAL APPROVAL _____ DATE _____ MECH. DES. _____ DATE _____ ELECT. DES. _____ DATE _____ CHECKED _____ DATE _____ DRAWN G.D.L. DATE 12-12-84				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
CRYSTAL OSCILLATOR				
SIZE	CODE IDENT. NO.	DWG NO.	ISSUE	
B	82679	NF 123	Ø	
SCALE	1:1	SHEET	OF	