

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

1 PS-5

USED ON


MODEL

ASS'Y. NO.

DATE

5-3-62

NP-465 B

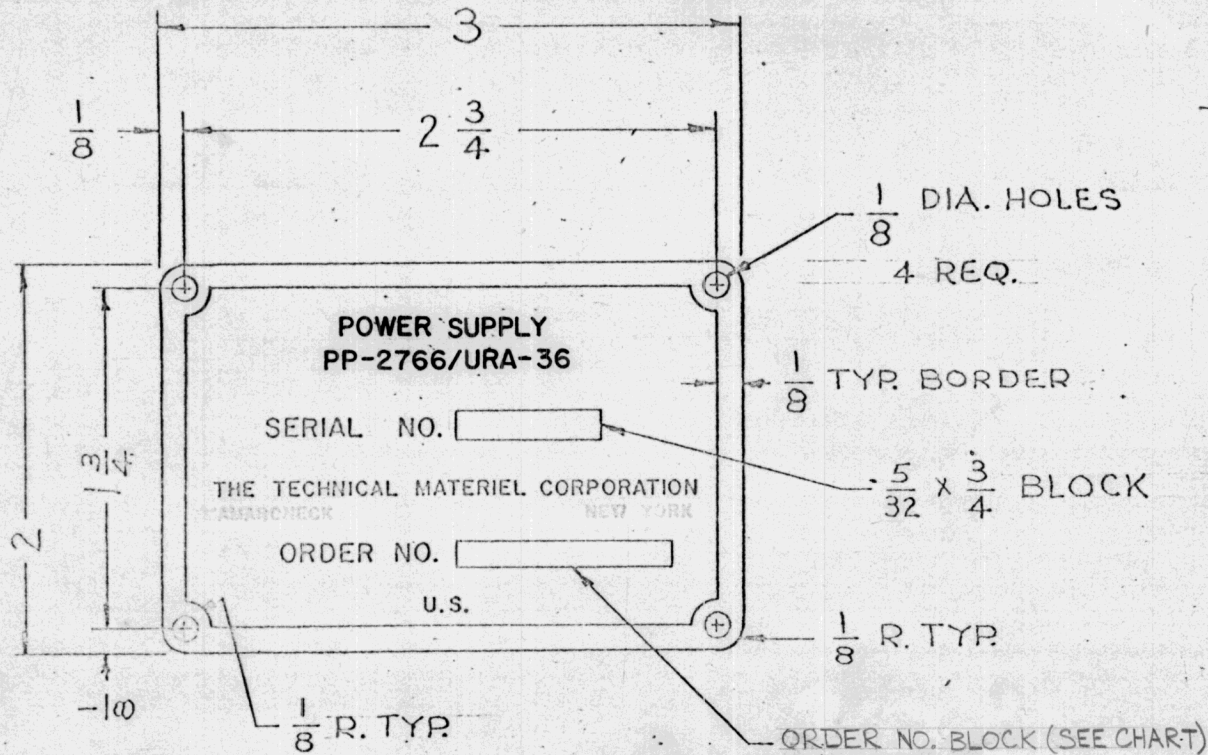

FINISH:
REVERSE ETCH, ANODIZE ON LUSTERLESS
BLACK BACKGROUND (TYPE **37038**)
PER FED. STD. NO. 595
COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER
WILL BE STEEL STAMPED BY T M C.

OR

WHERE PURCHASING REQUIREMENT IS
SUFFICIENTLY LARGE, ORDER NUMBER
SHALL BE ETCHED BY VENDOR IN LIEU
OF ORDER NUMBER BLOCK (SEE CHART
FOR PROPER NUMBER).

TMC NO.	ORDER NO. BLOCK	ORDER NO. (ETCHED BY VENDOR)
NP-465-1	5/32 X 1-1/8 Block	No Order Number
NP-465-2	No Block	18002-PP-62

NAMEPLATE TO BE IN ACCORDANCE WITH
MIL-STD-130 AND MIL-M-13231A
(REF: SIGNAL CORPS)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
B	TYPE & TEMPER WAS 250	11/3/66	17148	RME	JCB	DEB	.032		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
A	MAM'K, N.Y. DELETED ON PICTORIAL	7-28-64	11955				ALUMINUM		NAMEPLATE, IDENTIFICATION	
							MATERIAL		MODEL PS-5	
							5052-H32		G.P.S.	Joe
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
							SEE NOTE			FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
										NP-465 B

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

TOLERANCES ON

FRACTIONAL ± 1/64 DEC. ± .005 ANGLES ± 1/2°

SCALE:

MAXIMUM ALLOWABLE TOLERANCES HAVE
BEEN DETERMINED AND ANY DEVIATIONS
WILL BE CAUSE FOR REJECTION.
REMOVE ALL BURRS AND SHARP EDGES