

CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	RAK-9Q	SBT-1KQ	7-3-62

NP-496 B

**FINISH:**  
 REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595  
 COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER WILL BE STEEL STAMPED BY T M C OR WHERE PURCHASING REQUIREMENT IS SUFFICIENTLY LARGE, ORDER NUMBER SHALL BE ETCHED BY VENDOR IN LIEU OF ORDER NUMBER BLOCK (SEE CHART FOR PROPER NUMBER).

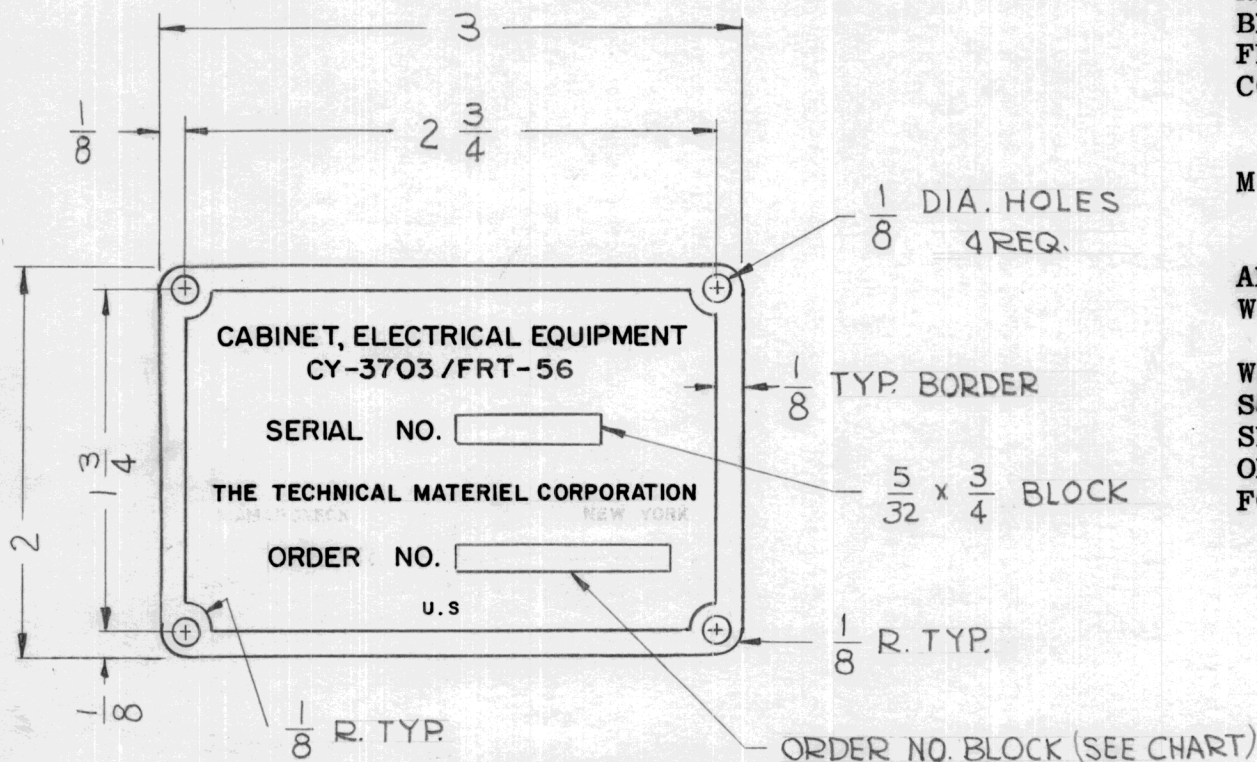

TMC NO.	ORDER NO. BLOCK	ORDER NO. (ETCHED BY VENDOR)
NP-496-1	5/32 X 1-1/8 Block	No Order Number
NP-496-2	No Block	

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.032	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK NAMEPLATE IDENTIFICATION	
		STOCK SIZE		
		ALUMINUM		
		MATERIAL		
		5052-H32	SRG	
		TYPE & TEMPER	DRAWN	CHECKED
		HEATTREAT. SPEC.		FINAL APPROVAL
		SEE NOTE		
		FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.
				NP-496 B

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ON  
 FRAC. ± 1/64 DEC. ± .005 ANGLES ± 1/2°

SCALE:  
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.  
 REMOVE ALL BURRS AND SHARP EDGES