

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT

USED ON

MODEL

ASS'Y. NO.

DATE


1

APP-4

SBT-1K

5-3-62

NP-468 B

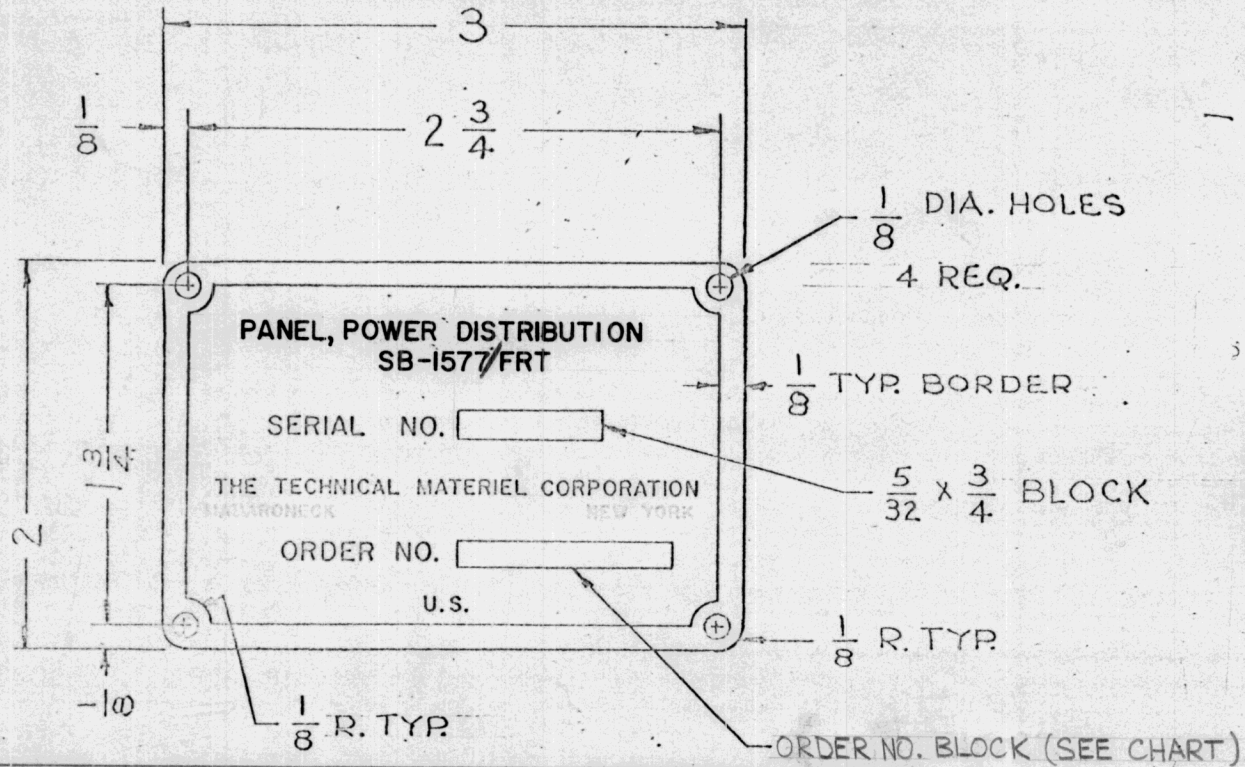

FINISH:
REVERSE ETCH, ANODIZE ON LUSTERLESS
BLACK BACKGROUND (TYPE 37038)
PER FED. STD. NO. 595
COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE - 3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER
WILL BE STEEL STAMPED BY T M C.
OR

WHERE PURCHASING REQUIREMENT IS
SUFFICIENTLY LARGE, ORDER NUMBER
SHALL BE ETCHED BY VENDOR IN LIEU
OF ORDER NUMBER BLOCK (SEE CHART
FOR PROPER NUMBER).

TMC NO.	ORDER NO. BLOCK	ORDER NO. (ETCHED BY VENDOR)
NP-468-1	5/32 X 1-1/8 Block	No Order Number
NP-468-2	No Block	18002-PP-62

NAMEPLATE TO BE IN ACCORDANCE WITH
MIL-STD-130 AND MIL-M-13231A
(REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.			DESCRIPTION		SYMBOL	
		.032			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
		STOCK SIZE						
B	TYPE & TEMPER WAS Z50	11/3/66	17148	RME	NAMEPLATE, IDENTIFICATION			
A	MAM'K, N.Y. DELETED ON PICTORIAL	7/28/64	11955	Shan @	MODEL APP-4			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRAC. ± 1/64 DEC. ± .003 ANGLES ± 1/2°		SCALE: MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			5052-H32	φ. S	Yue	SEM
				TYPE & TEMPER	HEATTREAT.SPEC.	DRAWN	CHECKED	FINAL APPROVAL
				SEE NOTE			66	NP-468 B
				FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		