| REQ. PER UNIT | USED ON MODEL | ASS'Y. NO. | DATE | NP652 | Ø |
|---|---|---|---|---|---|
| 1 | GPT-40K-E4 | | 8-21-64 | | |

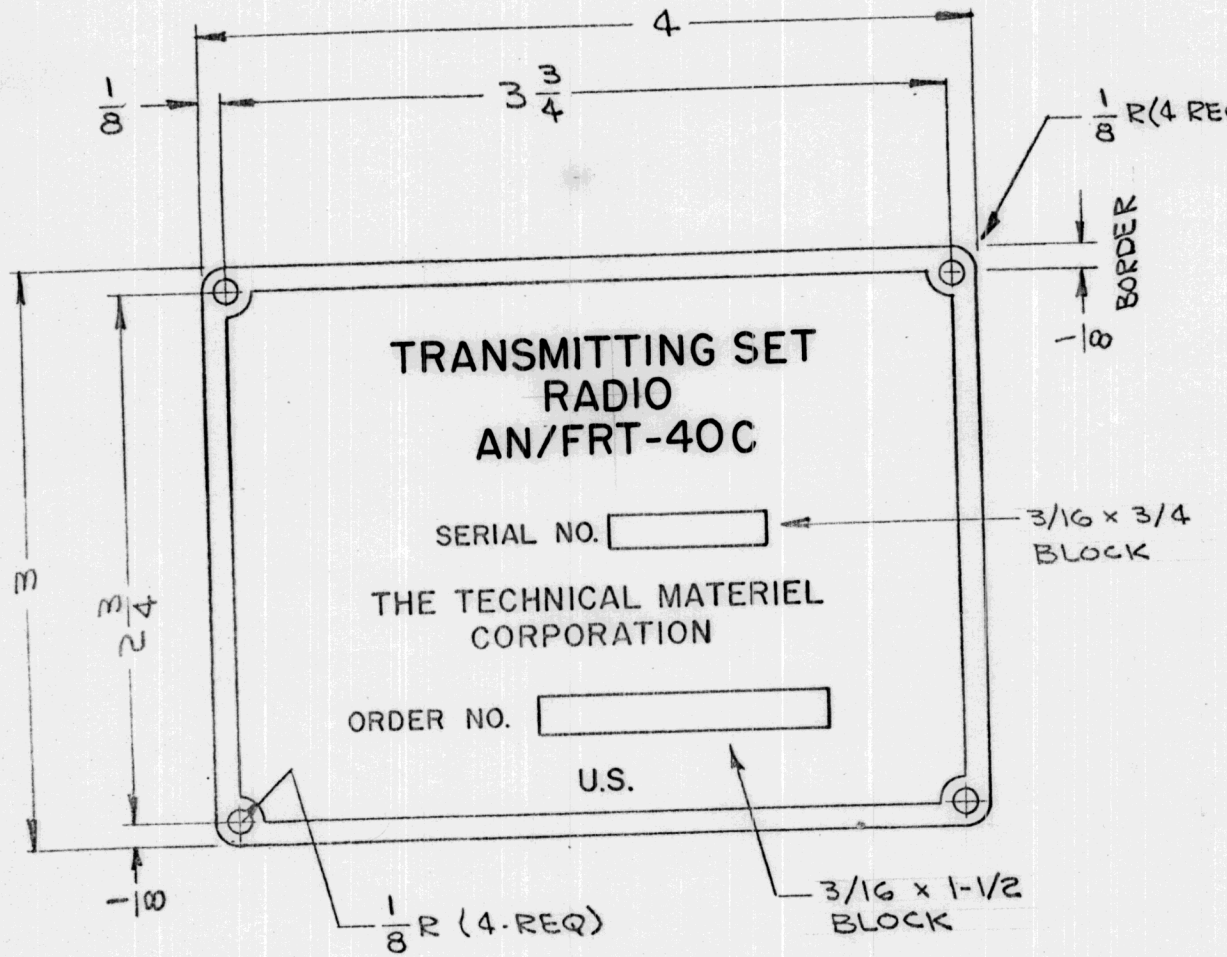


4-HOLES -1/8 DIA.

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

| SYM | DESCRIPTION | DATE | CH. NO. | DRAFTS | CHECKER | ENG. APP. |
|---|---|---|---|---|---|---|
| Ø | ORIGINAL RELEASE FOR PRODUCTION | 9.15.64 | Ø | G.L. | | |
| X | EXPER. RELEASE | 8-21-64 | X | G Lucas | | |

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

| REQ. | ITEM | PART NO. | DESCRIPTION | SYMBOL |
|---|---|---|---|---|
| | | .032 THK | THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK | |
| | | STOCK SIZE | NAMEPLATE, IDENTIFICATION | |
| | | ALUMINUM | | |
| | | MATERIAL | | |
| | | 5052-H32 — | | |
| | | TYPE & TEMPER / HEAT TREAT. SPEC. | | |
| | | SEE NOTE | | |
| | | FINISH & SPEC. NO. | | |

| DRAWN | CHECKED | FINAL APPROVAL |
|---|---|---|
| G. Lucas | CDD | NP652 Ø |
| ELEC. DES. APP. | MECH. DES. APP. | |

REPROVEL NO. 440H 1610

TMC FORM 108-A