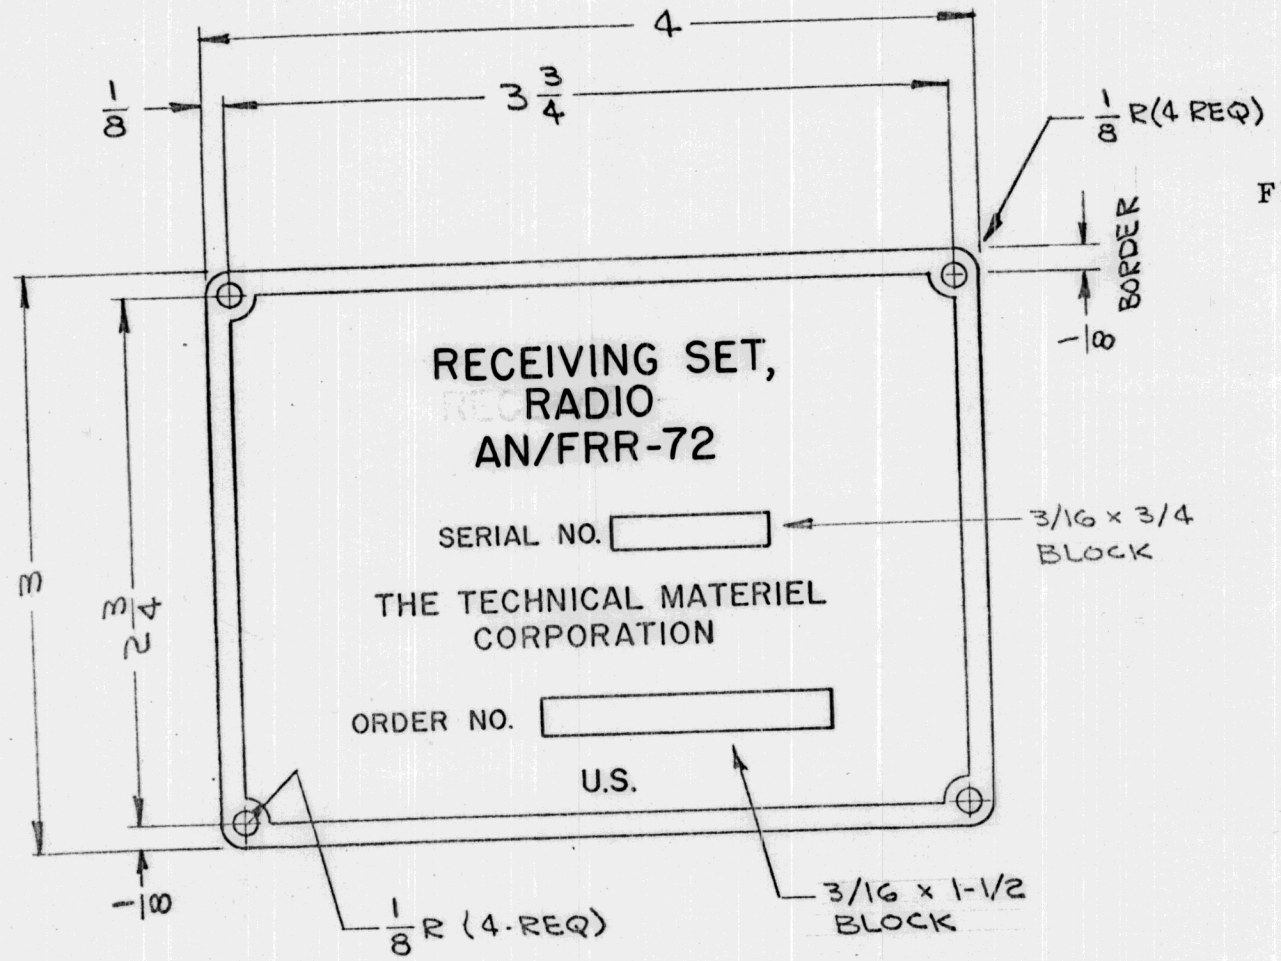


REQ. PER UNIT	USED ON		NP660	Ø
	MODEL	DATE		
1	DDR-5C / MSGA-1 / ARCA-1	8-21-64		






FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

4-HOLES -1/8 DIA.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	92			.032 THK		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
X	EXPER. RELEASE	8-21-64	X	Spec			STOCK SIZE				
							ALUMINUM		NAMEPLATE, IDENTIFICATION		
							MATERIAL				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1				5052-H32		  		
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							SEE NOTE				
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	
											NP660 Ø

DECIMALS
.X ± .05
.XX ± .01
.XXX ± .005

TOLERANCES

FRACTIONS
± 1/64
ANGLES
± 0° 30'

CODE
A