REQ. PER UNIT	USED ON			NP663	Ø
	MODEL	ASS'Y. NO.	DATE		
1	DDR-5A/MSGA-1		8-21-64		

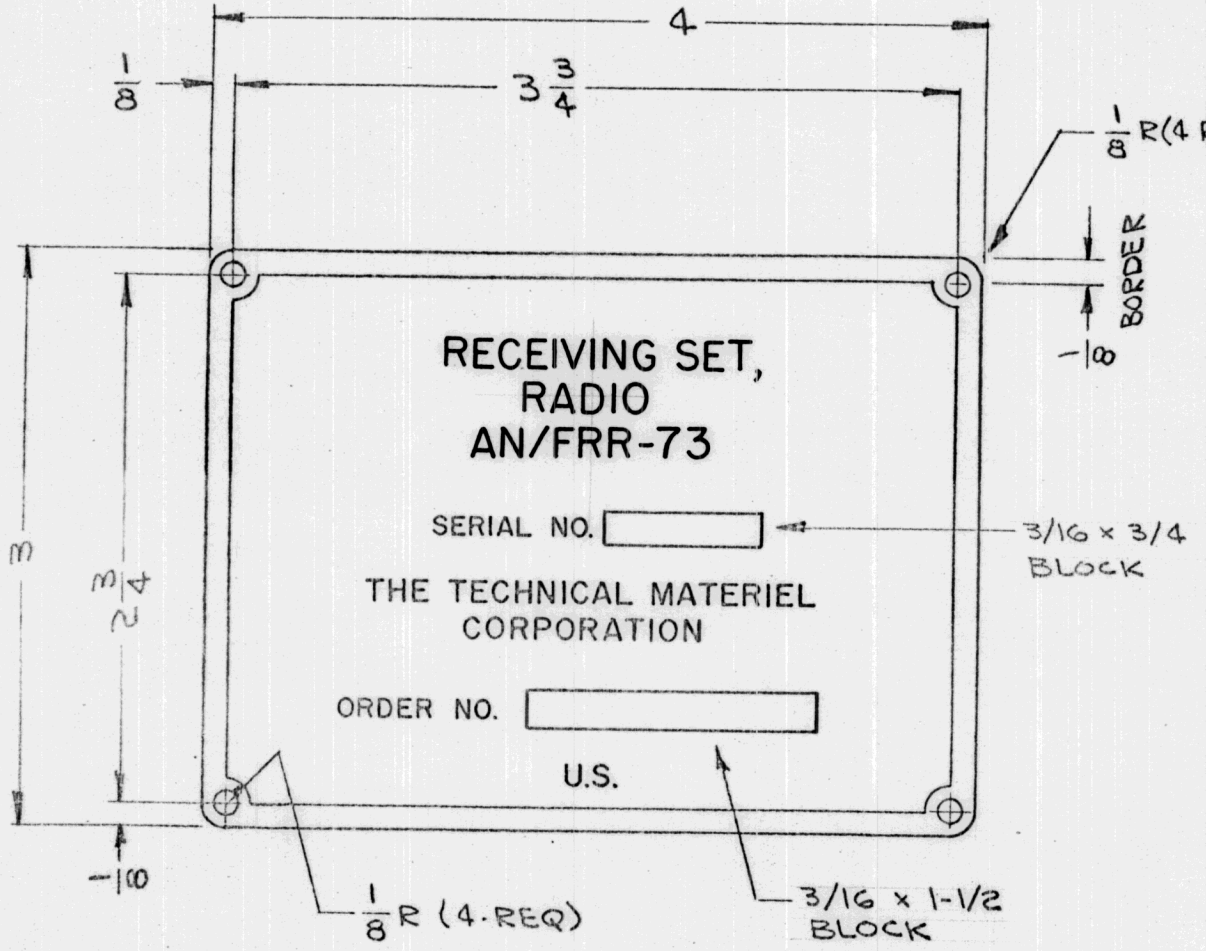

4-HOLES -1/8 DIA.

FINISH: REVERSE ETCH ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED. STD. NO. 595. COLORLESS VARNISH PER MIL-V-6894

MIN. LETTER SIZE-3/64 HIGH

ORDER AND SERIAL NUMBERS WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 AND MIL-M-13231A AND AMENDS(REF: SIGNAL CORPS)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	GL		
X	EXPER. RELEASE	8.21.64	X	G Lucas		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ±.05, .XX ±.01, .XXX ±.005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE 1:1

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE		
		ALUMINUM	NAMEPLATE, IDENTIFICATION	
		MATERIAL		
		5052-H32 —	G. Lucas	CMD
		TYPE & TEMPER / HEAT TREAT. SPEC.	DRAWN	CHECKED
		SEE NOTE		FINAL APPROVAL
		FINISH & SPEC. NO.	ELEC. DES. APP. / MECH. DES. APP.	NP663 Ø

TMC FORM 108-A

REPROVEL NO. 440H 16104