REQ. PER UNIT	USED ON			NP675	Ø
	MODEL	ASS'Y. NO.	DATE		
1	ATS-50-TU-2		8-21-64		

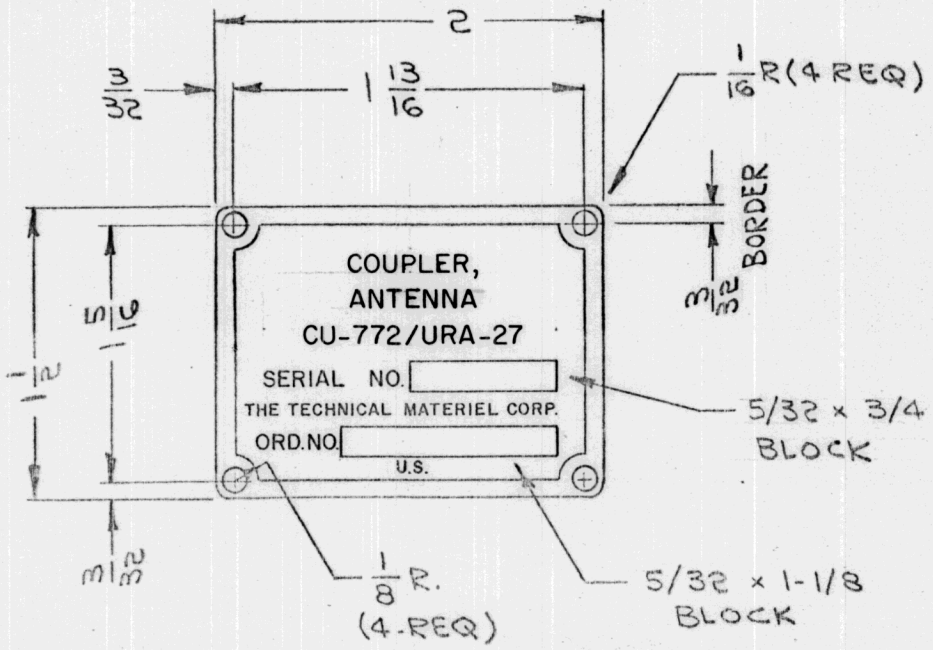

4 HOLES- 1/8 DIA.

FINISH: REVERSE ETCH ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.
COLORLESS VARNISH PER MIL-V-6894.

MIN. LETTER SIZE-3/64" HIGH

ORDER AND SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL STD-130 AND MIL-M-13231 AND AMENDS.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	9.15.64	Ø	G.P.		
X	EXPER. RELEASE	8.21.64	X	G.P.		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

DECIMALS .X ±.05 .XX ±.01 .XXX ±.005 TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE		
		ALUMINUM	NAMEPLATE, IDENTIFICATION	
		MATERIAL		

5052-H32	—	DRAWN	CHECKED	FINAL APPROVAL
TYPE & TEMPER	HEAT TREAT. SPEC.			
SEE NOTE				NP675 Ø
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	