


REQ. PER UNIT	USED ON			NP734	Ø
	MODEL	ASS'Y. NO.	DATE		
1	AP123		12-2-64		

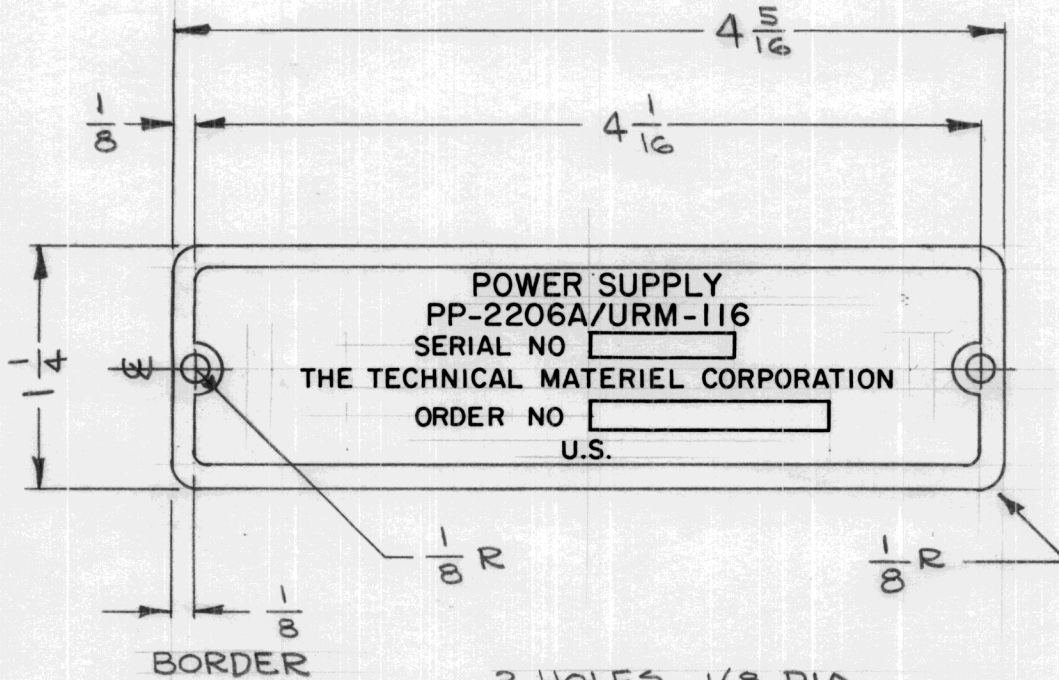

2 HOLES 1/8 DIA
 SERIAL NO. BLOCK 1/8 x 3/4
 ORDER NO. BLOCK 5/32 x 1-1/2

FINISH:
 REVERSE ETCH, ANODIZE ON LUSTERLESS
 BLACK BACKGROUND (TYPE 37038) PER FED.
 STD. NO. 595
 COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE-3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER
 WILL BE STEEL STAMPED BY TMC

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-
 STD-130 AND MIL-M-13231A AND AMENDS
 (REF: SIGNAL CORPS)

REQ.	ITEM	PART NO.	DESCRIPTION				SYMBOL	
Ø	ORIGINAL RELEASE FOR PRODUCTION	12-11-64	Ø	22				
X	EXPER. RELEASE	12-2-64	X	Shaw				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1					
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		CODE A		
		5052-H32	MATERIAL		SEE NOTE			
		TYPE & TEMPER	HEAT TREAT. SPEC.	DR. V.	CHECKED	FINAL APPROVAL		
		FINISH & SPEC. NO.		EEC. DES. APP.	MECH. DES. APP.	NP734	Ø	