


REQ. PER UNIT	USED ON			NP745	Ø
	MODEL	ASS'Y. NO.	DATE		
1	KMCU-1		12-29-64		

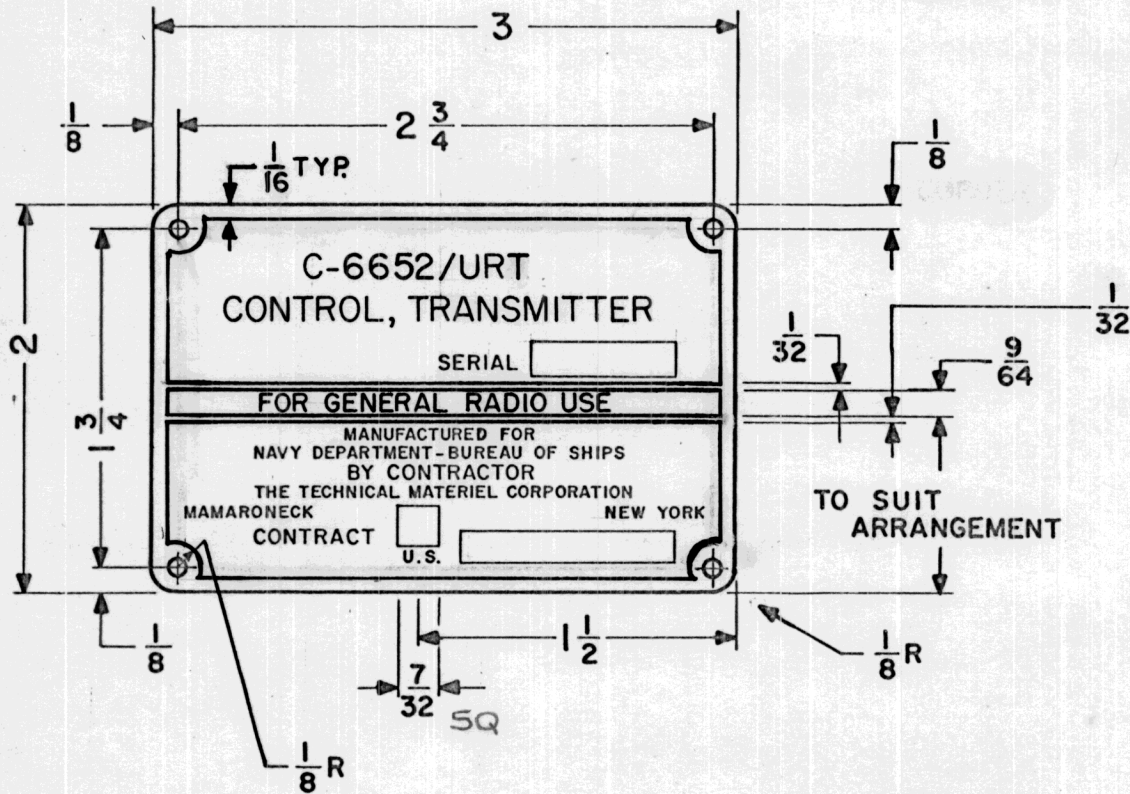

NOTE  
 FINISH: REVERSE ETCH, ANODIZE ON  
 LUSTERLESS BLACK BACKGROUND  
 (TYPE 37038) PER FED STD 595.

4 HOLES 1/8 DIA.  
 SERIAL BLOCK 3/16 X 3/4  
 CONTRACT BLOCK 5/32 X 1-1/8

NAMEPLATE TO BE MANUFACTURED IN  
 ACCORDANCE WITH MIL-P-15024 (SHIPS)  
 AND AMENDS. TYPE "A"

N.P.O.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
Ø		ORIGINAL RELEASE FOR PRODUCTION	
X <sub>1</sub>		BORDER WAS 1/8 TYP. C# ADD.	
X		EXPER. RELEASE	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	A
TOLERANCES			
5052-H32	—	G. Sencin	COED
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED
SEE NOTES			FINAL APPROVAL
FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.
			NP745