


REQ. PER UNIT	USED ON		NP845	B
	MODEL	ASSY. NO.		
	CMO-1		6.29.66	

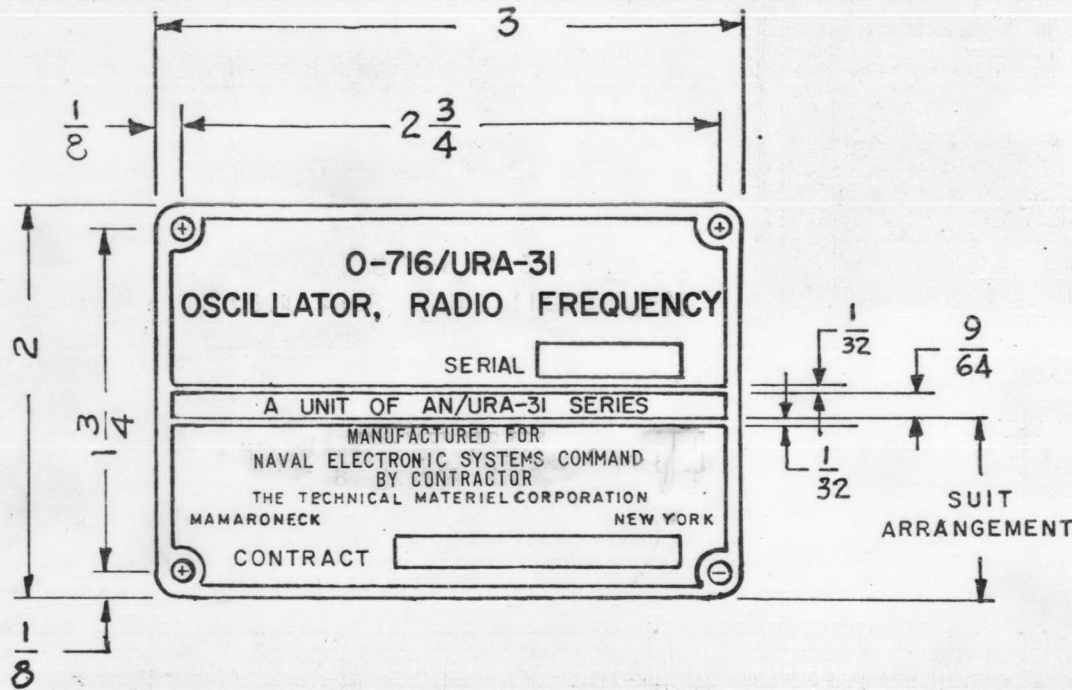

NOTE 1 FINISH:
REVERSE ETCH, LUSTERLESS BLACK
(37038) BACKGROUND PER FED-STD-595

NOTE 2 TYPE FACE
LETTERING TO BE GOTHIC OR SPARTAN;
W/MODIFIER (HEAVY, MEDIUM, CONDENSED
ETC.)
AS REQUIRED TO FIT SPACE.

NOTE 3 IDENTIFICATION PLATE TO BE
MANUFACTURED IN ACCORDANCE WITH
MIL-P-15024 AND AMENDS. (TYPE A)

CORNER RADIUS- INSIDE AND OUTSIDE 1/8 R
4 HOLES REQ.- 1/8 DIA
BORDERS- 1/16
SERIAL BLOCK- 3/16 x 3/4
CONTACT BLOCK- 1/8 x 1 1/2

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
B	UPDATED Nomenclature	3/27/69 19373 CV	
A	NAVELECSYS COM WAS BUSHIPS(SHORE)	5-2-67 18150 G.D.L. RH	
Ø	ORIGINAL RELEASE FOR PRODUCTION	2/27/67 Ø CV	
SYM	DESCRIPTION	DATE	CH. NO. DRAFTS CHECKER ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE
5052-H32		WHD	OKS Joe M. King
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED FINAL APPROVAL
SEE NOTE			
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP845 B