


REQ. PER UNIT	USED ON			NP846	B
	MODEL	ASS'Y. NO.	DATE		
	CBE-1		6.29.66		

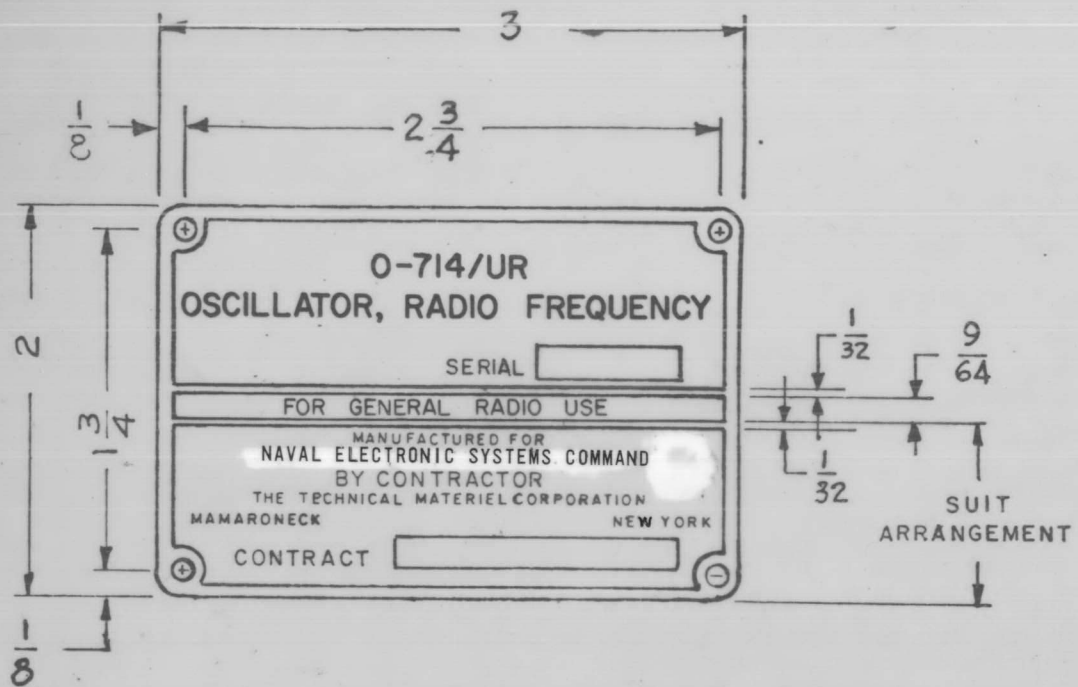

- NOTE 1 FINISH:  
REVERSE ETCH, LUSTERLESS BLACK.  
(37038) BACKGROUND PER FED-STD-595
- NOTE 2 TYPE FACE  
LETTERING TO BE GOTHIC OR SPARTAN;  
W/MODIFIER (HEAVY, MEDIUM, CONDENSED  
ETC.)  
AS REQUIRED TO FIT SPACE.
- NOTE 3 IDENTIFICATION PLATE TO BE  
MANUFACTURED IN ACCORDANCE WITH  
MIL-P-15024 AND AMENDS. (TYPE A)

CORNER RADIUS- INSIDE AND OUTSIDE 1/8 R  
4 HOLES REQ.- 1/8 DIA  
BORDERS- 1/16  
SERIAL BLOCK- 3/16 x 3/4  
CONTACT BLOCK- 1/8 x 1 1/2

B	UPDATED	3/26/69	19373	CV	JDe	EFM	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL			
A	MFG. FOR NAVY DEPT. WAS NAVAL ELECTRONIC SYSTEMS COMMAND	3-29-67	18049	L.A.K.	JDe	MMR		.032 THK	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	IDENTIFICATION, PLATE			
Ø	ORIGINAL RELEASE FOR PRODUCTION	12.16.66	Ø	RME			STOCK SIZE						
X1	CHGD BUSHIPS (SHORE) TO NAVAL ELECTRONIC SYSTEMS COMMAND	12.12.66	X1	RME	JDe			ALUMINUM	TMC MODEL CBE-1				
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE	5052-H32	WHD	JDe	M. R. Hays		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005							FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
TOLERANCES								SEE NOTE					
								FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	NP846	B	