REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	NP880	Ø
1	RFD-1B		12/30/66		

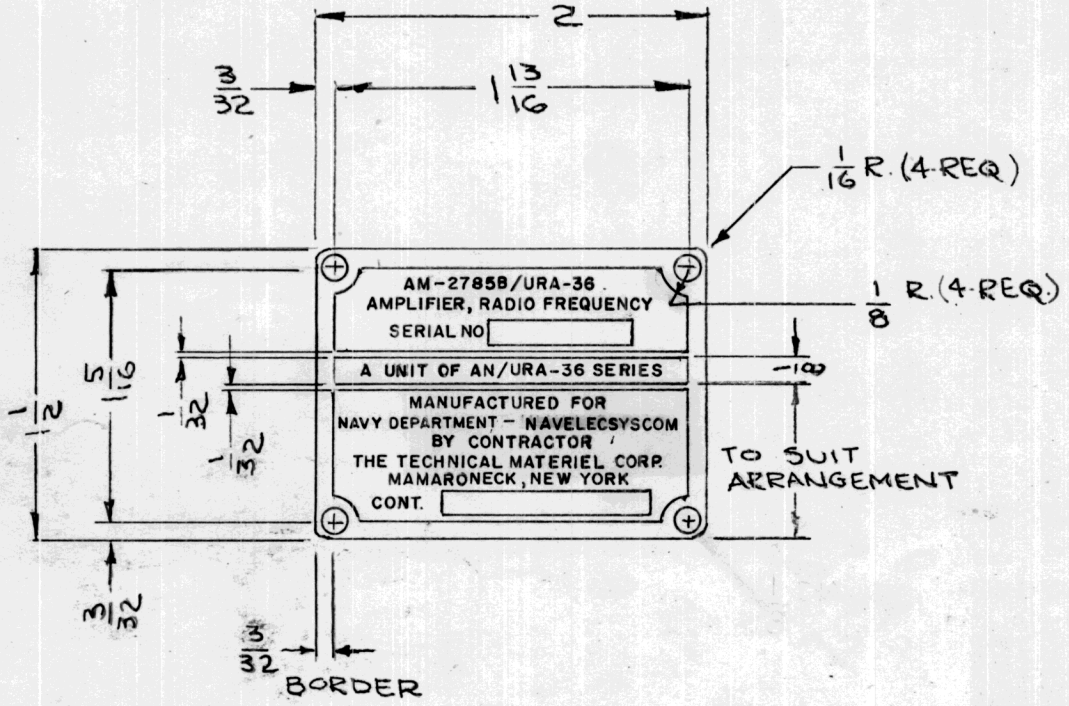

NOTE: FINISH

REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (37038) PER FED-STD-595.

4 HOLES - 1/8 DIA
SERIAL BLOCK = 1/8 x 3/4
CONT. BLOCK = 1/8 x 1-1/16

NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH MIL-P-15024 (SHIPS) AND AMENDS. (TYPE "A")

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIG RELEASE FOR PROD	6.21.67	Ø	RG		
X	EXPERIMENTAL RELEASE	12.29.66	X	RME		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS X ± .05, XX ± .01, XXX ± .005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

SCALE 1:1

CODE

REQ.	ITEM	PART NO.
		.032 THK
STOCK SIZE		
		ALUMINUM
MATERIAL		
		5052-H32
TYPE & TEMPER		HEAT TREAT. SPEC.
		SEE NOTE
FINISH & SPEC. NO.		

DESCRIPTION	SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
NAMEPLATE, IDENTIFICATION	

DRAWN	CHECKED	FINAL APPROVAL
RME		
ELEC. DES. APP.	MECH. DES. APP.	NP880 Ø