REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	NP884	Ø
1	ATS-50-TU-2A		12/30/66		

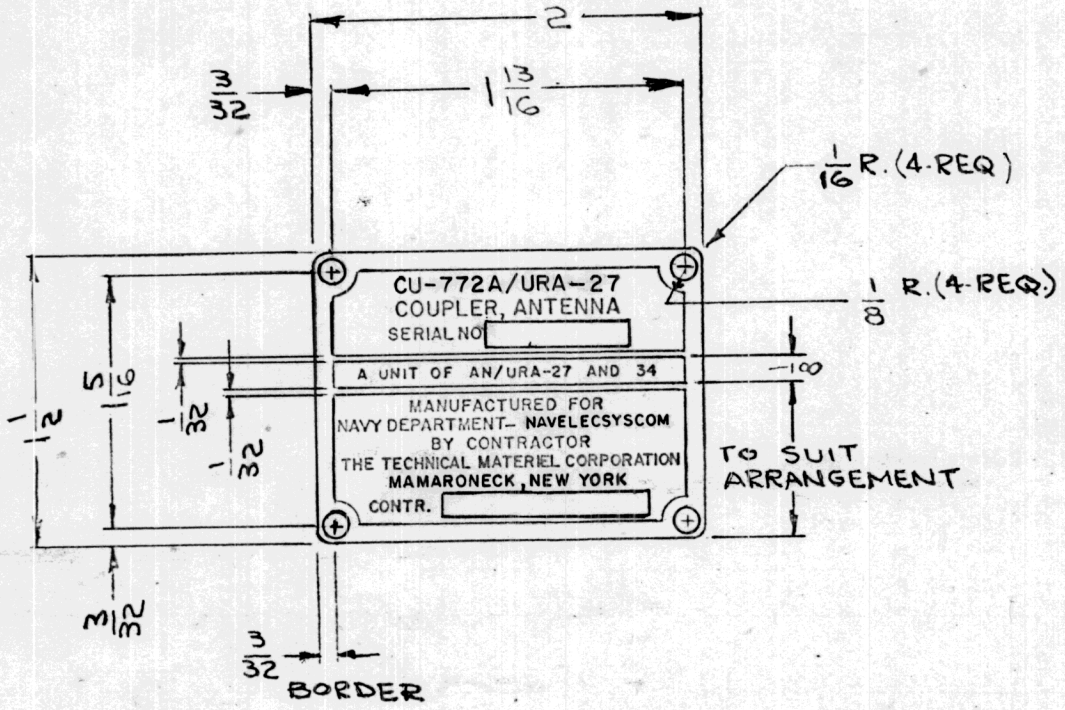

NOTE: FINISH

REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND (TYPE 37038) PER FED-STD-595.

4 HOLES - 1/8 DIA
SERIAL BLOCK = 1/8 × 3/4
CONT. BLOCK = 1/8 × 1-1/16

NAMEPLATE TO BE MANUFACTURED IN ACCORDANCE WITH MIL-P-15024 (SHIPS) AND AMENDS. (TYPE "A")

[redacted]

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIG RELEASE FOR PROD	6-21-67	Ø	RG	[signature]	[signature]
X	EXPERIMENTAL RELEASE	12/30/66	X	RME		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 — TOLERANCES — FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
.032 THK			THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
STOCK SIZE			NAMEPLATE, IDENTIFICATION	
ALUMINUM				
MATERIAL				
5052-H32			RME	[signature]
TYPE & TEMPER	HEAT TREAT. SPEC.		DRAWN	CHECKED	FINAL APPROVAL
SEE NOTE					NP884 Ø
FINISH & SPEC. NO.			ELEC. DES. APP.	MECH. DES. APP.	