


REQ. PER UNIT	USED ON			NP982	Ø
	MODEL	ASS'Y. NO.	DATE		

FINISH -
 REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK
 BACKGROUND. (TYPE 37038) PER-FED-STD-595.
 COLORLESS VARNISH PER MIL-V-6894.

MIN LETTER HEIGHT 3/64"

ORDER & SERIAL NUMBERS TO BE STEEL
 STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH
 MIL-STD-130 & MIL-M-13231 & AMENDS.

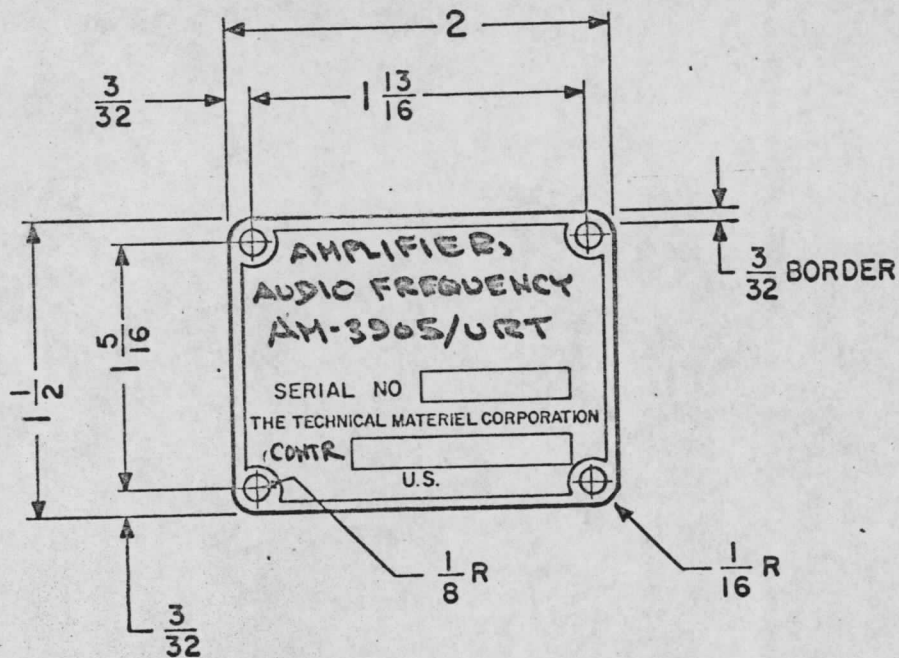

4 HOLES - 1/8 DIA.
 SERIAL BLOCK - 5/32 x 3/4
 ORDER BLOCK - 5/32 x 1-1/8

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL			
Ø	ORIGINAL RELEASE	6/9/69	Ø	ADD		HE		.032 THK. STOCK SIZE	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
X	EXPER. RELEASE		X					ALUMINUM	NAMEPLATE, IDENTIFICATION				
								MATERIAL	TMC MODEL SPU-2				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE						5052-H32	—A	g. Sencory	COO		
		1:1						TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED		
	DECIMALS X ± .05 XX ± .01 XXX ± .005	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE						SEE NOTE				
	TOLERANCES		A						FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.		
												NP982	Ø