


APPLICATION

QTY	MODEL USED ON	ASSY NO.	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD	APPD
	RTTD-4		X	EXPERIMENTAL RELEASE	6/17/68		C.V.		<i>HO</i>
			Ø	ORIG. RELEASE FOR PROD.	10/30/68	Ø	R.G.		<i>HO</i>
			A	DIMENSIONAL OUTLINE ADDED	3/24/69	19352	<i>HO</i>		<i>HO</i>


REVISIONS

MFGR (TMC CODE#): S401-302
 MFGR PART NUMBER: MC846P
 CASE TYPE: #93

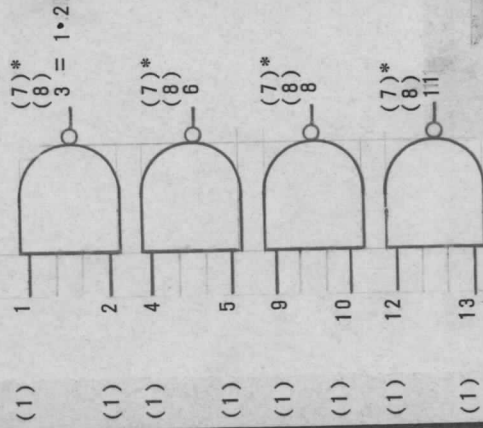

* APPLIES TO MC849F,
 MC849P, MC949F

MAXIMUM RATINGS	VALUE	UNIT
SUPPLY VOLTAGE CONTINUOUS	+8	Vdc
PULSED, < 1 SECOND	+12	
OUTPUT CURRENT (INTO OUTPUTS)	30	
OPERATING TEMPERATURE RANGE:	0° TO +75°C	

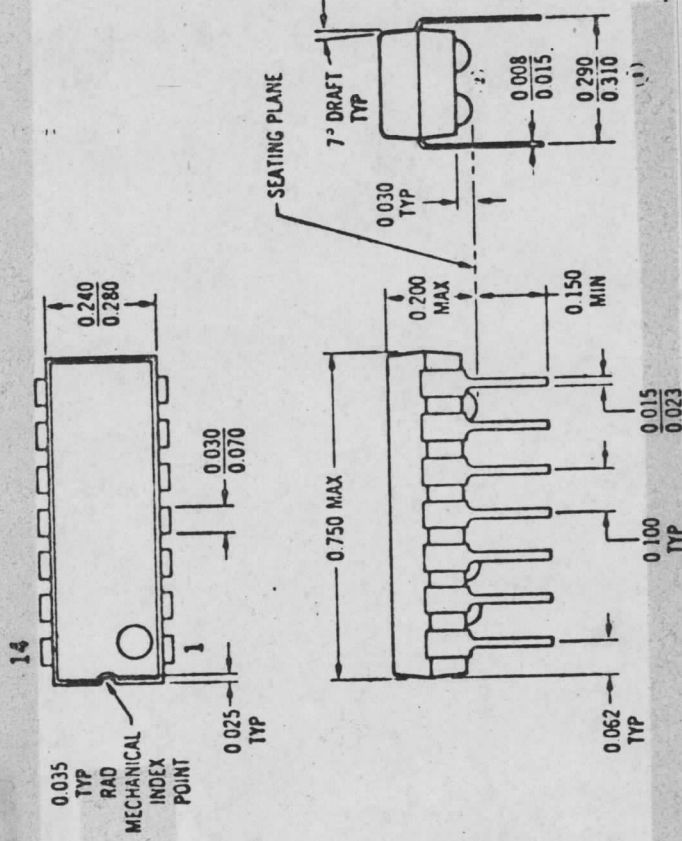

REQ'D ITEM	PART NUMBER	DESCRIPTION	SYM.
S. DE MARCO			
FINAL APPROVAL	DATE	LIST OF MATERIAL THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK QUAD 2 INPUT GATE NAND/NOR	
MECH. DES.	DATE 10/30/68		
ELECT. DES.	DATE 10/28/68		
CHECKED	DATE		
DRAWN	DATE		
S401-302 (MC846P)		SIZE A	CODE IDENT. NO. 82679
		SCALE	DWG NO. NW 173
			ISSUE A

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.